FINAL DETAILED PLANS

225 NORTHWESTERN AVENUE

PLANNED DEVELOPMENT

PLANNED DEVELOPMENT (CBW TO PDMX)

A PART OF THE NORTHEAST QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST,
WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

THE RENDERING OF THE BUILDING IS A SCHEMATIC DESIGN TOOL TO REPRESENT THE PROPOSED BUILDING ON SITE. THE RENDERING WILL NOT BE USED FOR CONSTRUCTION. THE ELEVATION DRAWINGS SHALL BE USED FOR SPECIFIC INSTRUCTION OF WHAT IS PROPOSED FOR THE DESIGN/MATERIALS.

VICINITY MAP

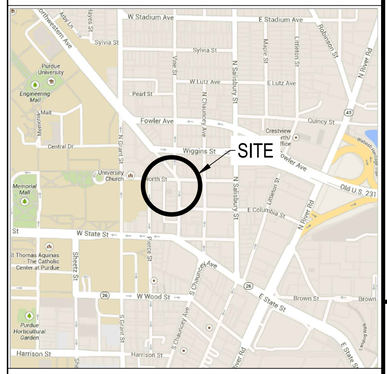

CONTACT INFORMATION

AUTHORITY	CONTACT	PHONE
DEVELOPER	LAND QUEST, LLC ATTN: RON WHISTLER PO BOX 388 LAFAYETTE, IN 47902	765-491-7701
TIPPECANOE COUNTY AREA PLAN COMMISSION	TIPPECANOE COUNTY OFFICE BUILDING 20 NORTH 3RD STREET LAFAYETTE, IN 47901	765-423-9242
ARCHITECT	KJG ARCHITECTURE, INC ATTN: BARRY KNECHTEL 527 SAGAMORE PARKWAY W., SUITE 101 WEST LAFAYETTE, IN 47906	765-497-4598
ATTORNEY	REILING TEDER & SCHRIER ATTN: DAN TEDER 415 COLUMBIA STREET, SUITE 3000 LAFAYETTE, IN 47902	765-423-5333
ELECTRIC	DUKE ENERGY ATTN: STEVEN THOMPSON 3395 GREENBUSH STREET LAFAYETTE, IN 47905	765-446-4012
GAS	VECTREN ENERGY ATTN: DERON LESLIE 1250 S CREASY LANE LAFAYETTE, IN 47905	765-449-5630
TELEPHONE	FRONTIER COMMUNICATIONS ATTN: TED FOSTER 3216 IMPERIAL PARKWAY LAFAYETTE, IN 47909	765-423-3531
CABLE	COMCAST COMMUNICATIONS ATTN: JERRY SHUTTERS 1002 EAST CENTER ROAD KOKOMO, IN 46902	765-455-5935
FIRE DEPARTMENT	WEST LAFAYETTE FIRE DEPARTMENT ATTN: CAPTAIN MIKE FRANCIS, INSPECTOR 300 NORTH ST WEST LAFAYETTE, IN 47906	765-775-5178
WATER	INDIANA AMERICAN WATER ATTN: BRANDON FRANCE 1007 HAPPY HOLLOW ROAD WEST LAFAYETTE, IN 47906-2359	765-743-7973 EXT 2
	APPROVED: _____ DATE: 4/23/14	
SANITARY SEWER STORMWATER MANAGEMENT	DAVE BUCK, PE, CITY ENGINEER 609 WEST NAVAJO STREET WEST LAFAYETTE, IN 47906	765-775-5130
WEST LAFAYETTE ADMINISTRATIVE OFFICER	APPROVED: _____ DATE: _____	

SHEET INDEX

G001	TITLE SHEET
G002	LEGEND & ABBREVIATIONS
G003	SPECIFICATIONS
V100	FINAL PLAT
V101	TOPOGRAPHIC SURVEY
V102 - V104	DEMOLITION PLAN
C101	MAINTENANCE OF TRAFFIC
C102	SITE & UTILITY PLAN
C103	GRADING & DRAINAGE PLAN
C104	STORMWATER POLLUTION PREVENTION: PLAN
C105	STORMWATER POLLUTION PREVENTION: SPECIFICATIONS
C106	STORM SEWER PLAN AND PROFILES
C107	SANITARY SEWER PLAN AND PROFILE
C501	DETAILS
C502	INDIANA AMERICAN WATER STANDARD DETAILS
A100	ARCHITECTURAL SITE PLAN
A101	ARCHITECTURAL LANDSCAPING PLAN
A105-A107	ARCHITECTURAL FLOOR PLANS
A110	ARCHITECTURAL UNIT PLANS
A200-A201	ARCHITECTURAL EXTERIOR ELEVATIONS
E100	ARCHITECTURAL ELECTRICAL LIGHTING PLAN
E101	ARCHITECTURAL LIGHTING CUTSHEETS
R501-R518	CITY OF WEST LAFAYETTE TYPICAL CONSTRUCTION GUIDELINES & DETAILS
R519-R535	PRELIMINARY PLAN SET

I, Justin R. Frazier, affirm under the penalties for perjury, that I have taken reasonable care to redact each social security number in this document, unless required by law. Prepared By: Justin R. Frazier

IBI GROUP
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • LAFAYETTE, INDIANA
phone: (765) 742-1800 • fax: (765) 742-1805
www.ibigroup.com

CERTIFIED BY:

JUSTIN R. FRAZIER
REGISTERED
NO. 10606088
STATE OF INDIANA
PROFESSIONAL ENGINEER

Justin R Frazier
04/29/14

225 NORTHWESTERN AVENUE
PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION
2	4/16/14	FINAL PLAT ADDED

PROJECT NO: 13080
FILE: 13080-GENERAL.DWG
DRAWN BY: JRF
CHECKED BY: TRB

LOCATION:
A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:
TITLE SHEET AND INDEX

G001

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\FINAL PLANS\PLOT\13080-GENERAL.dwg USER: JUSTIN FRAZIER - DATE: Wednesday, April 30, 2014 9:29:34 AM

ABBREVIATIONS

A	VERTICAL CURVE GRADE CHANGE
A/C	AIR CONDITIONING UNIT
AASHTO	AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS
ADA	AMERICANS WITH DISABILITIES ACT
ADDL	ADDITIONAL
AGGR	AGGREGATE
ALNMT	ALIGNMENT
ALT	ALTERNATE
APPROX	APPROXIMATE
AR	AS REQUIRED
ARCH	ARCHITECT
ASTM	AMERICAN SOCIETY FOR TESTING AND MATERIALS
AWWA	AMERICAN WATER WORKS ASSOCIATION
B&B	BALLED AND BURLAPPED
B/B	BACK TO BACK
BC	TOP BACK OF CURB OR BEGINNING OF CURB
BDRY	BOUNDARY
BFS	BEGIN FULL SUPERELEVATION
BM	BENCHMARK
BNC	BEGIN NORMAL CROWN
BOA	BEGINNING OF ALIGNMENT
BP	BEGINNING POINT
BV	BALL VALVE
BVC	BEGIN VERTICAL CURVE
BVCE	BEGIN VERTICAL CURVE ELEVATION
BVCS	BEGIN VERTICAL CURVE STATION
BVP	BEGIN VERTICAL PROFILE
C TO C	CENTER TO CENTER
C&G	CURB AND GUTTER
CB	CATCH BASIN
CFS	CUBIC FEET PER SECOND
CHK	CHECK
CHKV	CHECK VALVE
CI	CURB INLET
CJ	CONTROL JOINT
CLL	COLUMN LINE
CMP	CORRUGATED METAL PIPE
CO	CLEAN OUT
COL	COLUMN
COMB	COMBINED / COMBINATION
COORD	COORDINATE
CP	CONTROL POINT
CRN	CROWN
CS	COUNTY SURVEYOR
CTR	CONTOUR
CTRL	CONTROL
CU	CUBIC
CU YD	CUBIC YARD
D	DEPTH
DA	DRAINAGE AREA
DAT	DATUM
DEMO	DEMOLITION
DI	DROP INLET
DIA	DIAMETER
DIM	DIMENSION
DIP	DUCTILE IRON PIPE
DIR	DIRECTION
DIST	DISTANCE
DW	DOMESTIC WATER
E	EASTING
EA	EACH
EC	END OF CURVE
EFS	END FULL SUPERELEVATION
EL	ELEVATION
ELEC	ELECTRIC
ELIP	ELLIPTICAL
ENGR	ENGINEER
EOA	END OF ALIGNMENT
EP	EDGE OF PAVEMENT
EP	END POINT OF ALIGNMENT OR EDGE OF PAVEMENT
ES	EDGE OF SHOULDER
ESMT	EASEMENT LINE
EST	ESTIMATE
EVC	END VERTICAL CURVE
EVCE	END VERTICAL CURVE ELEVATION
EVCS	END VERTICAL CURVE STATION
EVP	END VERTICAL PROFILE
EXST	EXISTING
EXST GR	EXISTING GRADE
FF	FINISH FLOOR
FH	FIRE HYDRANT
FHWA	FEDERAL HIGHWAY ADMINISTRATION
FIN	FINISH
FIN GR	FINISH GRADE
FLL	FLOW LINE
FN	FENCE
FOC	FACE OF CURB
FP	FIRE PROTECTION

ABBREVIATIONS

FTG	FOOTING
FUT	FUTURE
G	CURB GUTTER
GAL	GALLON
GB	GRADE BREAK
GPM	GALLON PER MINUTE
GUT	CURB GUTTER
HDPE	HIGH DENSITY POLYETHYLENE
HDWL	HEADWALL
HH	HANDHOLE
HMA	HOT MIX ASPHALT
HORIZ	HORIZONTAL
HP	HIGH POINT
HVAC	HEATING, VENTILATION & AIR CONDITIONING UNIT
ID	INSIDE DIAMETER
INV	INVERT ELEVATION
INV	INVERT
INV EL	INVERT ELEVATION
K	VERTICAL CURVE CURVE COEFFICIENT
LP	LOW POINT
M	MATCH EXISTING
MAX	MAXIMUM
MBL	MINIMUM BUILDING LINE
MDSK	DISC MONUMENT
MH	MANHOLE
MIN	MINIMUM
MISC	MISCELLANEOUS
MRB	REBAR
MRBC	REBAR & CAP
MPN	IRON PIN
MIP	IRON PIPE
N	NORTHING
NTS	NOT TO SCALE
OC	ON CENTER
OD	OUTSIDE DIAMETER
PC	POINT OF CURVATURE
PCC	POINT OF COMPOUND CURVE
PCCP	PORTLAND CEMENT CONCRETE PAVEMENT
PCF	PONDS PER CUBIC FOOT
PH	PHASE
PI	TANGENT - TANGENT POINT OF INTERSECTION
PIV	POST INDICATOR VALVE
PRC	POINT OF REVERSE CURVE
PSI	POUNDS PER SQUARE INCH
PT	POINT OF TANGENT
PVC	POLYVINYL CHLORIDE
PVI	POINT OF VERTICAL INTERSECTION
RBR	REBAR
RCP	REINFORCED CONCRETE PIPE
REQD	REQUIRED
ROW	RIGHT-OF-WAY
RVL	REVEAL
SAN	SANITARY
SB	SOIL BORE
SCD	SECTION CORNER DOSSIER
SCH	SCHEDULE
SDR	STANDARD DIMENSION RATIO
SIG	SIGNAL
SIM	SIMILAR
SPEC	SPECIFICATION
SQ	SQ
SQ FT	SQ FOOT
SS	SANITARY SEWER
SSD	SUB-SURFACE DRAIN
ST	STORM SEWER
STR	STRUCTURE
SW	SIDEWALK
TBM	TEMPORARY BENCHMARK
TC	TOP BACK OF CURB
TDH	TOTAL DYNAMIC HEAD
TEL	TELEPHONE
TEMP	TEMPORARY
TO PIPE	TOP OF PIPE
TOC	TOP OF CONCRETE
TOP	TOP OF PAVEMENT
TOS	TOP OF STEP
TOW	TOP OF WALL
TRAF	TRAFFIC
TSV	TAPPING SLEEVE & VALVE
TYP	TYPICAL
UON	UNLESS OTHERWISE NOTED
VAR	VARIES OR VARIABLE
VCP	VITRIFIED CLAY PIPE
VERT	VERTICAL
VOL	VOLUME
W/	WITH
W/O	WITHOUT
WV	WATER VALVE

LEGEND

EXISTING	PROPOSED

EROSION CONTROL

BASKET INLET PROTECTION (BIP)
CURB INLET OR TURNOUT PROTECTION (CI)
AREA OF TEMPORARY SEEDING (TS)
AREA OF PERMANENT SEEDING (PS)
AREA OF SODDING (S)
GRAVEL DONUT INLET PROTECTION
ROCK DAM
CONCRETE WASHOUT (CW)
CONSTRUCTION ENTRANCE
TEMPORARY STOCK PILE LOCATION
SILT FENCE (SF)
LIMITS OF CONSTRUCTION

LEGEND

EXISTING	PROPOSED

TRANSPORTATION & TRAFFIC

SIGNAL MANHOLE
SIGNAL BOX
SIGNAL STRAIN POLE
CANTILEVER SIGNAL ARM
SIGN
PEDESTRIAN SIGNAL
STOP SIGN (STOP)
TRAFFIC BARREL
ROAD CENTERLINE
TRAFFIC SIGNAL CONDUIT / LINE (TSC)
CURB LINE
RAILROAD TRACKS

GENERAL SITE FEATURES

LIGHT POLE
UTILITY POLE
STRAIN POLE
GUY WIRE
SQUARE FENCE POST
ROUND FENCE POST
BOLLARD
YARD / LANDSCAPE LIGHT
FLAG POLE
HANDICAP PARKING SPACE
SOIL BORE HOLE
PARKING WHEEL STOP
SHRUB
CONIFEROUS TREE
DECIDUOUS TREE
MAILBOX
MONITORING WELL
HVAC UNIT
SATELLITE DISH
TREE LINE
BRUSH LINE
FENCE LINE - BARB WIRE / WOVEN WIRE
FENCE LINE - PICKET / PRIVACY
FENCE LINE - CHAINLINK
GUARDRAIL
EDGE OF GRAVEL

TOPOGRAPHY & DRAINAGE

SPOT ELEVATION (XXX.0)
SURFACE GRADE / SLOPE WITH ARROW INDICATING DOWNGRADE (X.X% / XX.X:1)
INDEX CONTOUR (XXX)
INTERMEDIATE CONTOUR (XXX)
DITCH OR SWALE FLOW LINE
TOP OF BANK
TOE OF SLOPE
EDGE OF STREAM, RIVER OR POND
100-YEAR FLOOD PLAIN EXTENTS (FP)
FLOOD WAY EXTENTS (FW)
EMERGENCY ROUTING PATH
SOIL DEFINITION LINE

PROPERTY & BOUNDARY

SUBJECT TITLE LINE
SUBJECT LOT LINE
RIGHT-OF-WAY LINE
MINIMUM BUILDING SETBACK LINE
EASEMENT LINE
ADJOINING TITLE LINE
SECTION LINE OR ALIQUOT DIVISION

MONUMENTATION & CONTROL

SECTION CORNER
IRON PIPE FOUND
CROSS CUT FOUND
REBAR FOUND
RAILROAD SPIKE FOUND
RIGHT-OF-WAY MARKER FOUND
INDOT TYPE "C" MONUMENT FOUND
PROJECT BENCHMARK
2-INCH LONG MAG NAIL WITH WASHER STAMPED "TBIRD FIRM #0052" SET AT GRADE UNLESS OTHERWISE NOTED
5/8-INCH DIAMETER REBAR WITH YELLOW PLASTIC CAP STAMPED "TBIRD FIRM #0052" SET AT GRADE UNLESS OTHERWISE NOTED

GENERAL ANNOTATION

KEYNOTE INDICATOR (SEE KEYNOTE INDEX FOR DESCRIPTION)
KEYNOTE INDICATOR (SEE SURVEYOR REPORT FOR DISCUSSION)
DETAIL GRID NUMBER / PROJECT SHEET NUMBER
SECTION CALLOUT NUMBER / PROJECT SHEET NUMBER
LINE BREAK / LAND HOOK
[XX.XX] DIMENSION PER RECORD DOCUMENT. WHERE RECORD DIMENSION IS THE ONLY ONE SHOWN, THE RECORD DIMENSION IS THE SAME AS MEASURED.

LEGEND

EXISTING	PROPOSED

SANITARY SEWER

MANHOLE (S)
CLEAN OUT (CO)
LIFT STATION (LIFT)
LATERAL
SANITARY SEWER PIPE (SS)

STORM SEWER & DRAINAGE

MANHOLE (D)
ROUND CATCH BASIN OR BEEHIVE
SQUARE CATCH BASIN OR BEEHIVE
END SECTION
CATCH BASIN
STORM SEWER PIPE / CULVERT (ST)

WATER

MANHOLE (W)
METER
VALVE
VAULT
LINE MARKER
FIRE HYDRANT
POST INDICATOR VALVE (PIV)
WELL (W)
WATER MAIN / LINE (W)
WATER SERVICE LINE (WS)

CABLE TV / COMMUNICATION

MANHOLE (C)
VAULT
LINE MARKER
COMMUNICATION LINE (COM)

ELECTRIC

MANHOLE (E)
METER
VAULT
LINE MARKER
TRANSFORMER
ELECTRIC LINE (E)

FIBER OPTIC

MANHOLE (F)
VAULT
LINE MARKER
FIBER OPTIC LINE (FO)

GAS

MANHOLE (G)
METER
VALVE
VAULT
LINE MARKER
GAS LINE (G)

TELEPHONE

MANHOLE (T)
VAULT
LINE MARKER
TELEPHONE LINE (T)

COMBINATION UTILITIES

ELECTRIC & CATV / COMMUNICATION (EC)
ELECTRIC & TELEPHONE (ET)
ELECTRIC, TELEPHONE & CATV (ETC)
GAS, ELECTRIC, CATV & TELPHONE (GECP)
TELEPHONE & CATV (TC)
UNKNOWN OVERHEAD UTILITIES (OHU)
COMBINED SANITARY & STORM SEWER (CS)

Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • Lafayette, Indiana
phone: (765) 742-1800 • fax: (765) 742-1905
www.tbirddesign.com

CERTIFIED BY:

JUSTIN R. FRAZIER
REGISTERED
NO. 10606088
STATE OF INDIANA
PROFESSIONAL ENGINEER

04/29/14

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION

PROJECT NO: 13080
FILE: 13080-GENERAL.DWG
DRAWN BY: JRF
CHECKED BY: TRB

LOCATION:

A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:

LEGEND & ABBREVIATIONS

G002

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\FINAL PLANS\PLOT\13080-GENERAL.dwg - USER: JUSTIN FRAZIER - DATE: Tuesday, April 29, 2014 12:25:19 PM

GENERAL

1. A preconstruction meeting is to be held and will include representatives from the City of West Lafayette, and the various utility companies along with any other government agencies involved and the Contractor.

2. The Owner or his representative shall notify all utility companies and the Contractor before the preconstruction meeting. No construction will begin until said preconstruction meeting has been held.

3. A minimum of 48 hours notice will be provided to the appropriate governmental agency prior to construction, restart, or change of operation and shall be the responsibility of the Contractor.

4. Utility locations shown herein are approximate locations based on above ground evidence. Contractor shall verify location of all underground utilities prior to excavation. During construction, all utilities shall be adequately supported to minimize damage. Contractor shall contact the appropriate utility or governmental agency immediately if any damage to existing utilities occurs and shall be responsible for repairing the utility in accordance with the affected utility's repair policy.

5. The Contractor shall have all work open to inspection of all agencies having jurisdiction over the project. Construction work shall conform to the requirements of said agencies. The Contractor shall provide safe access to the construction site for all inspectors and shall provide material samples for testing, as required.

6. The Contractor shall be solely and completely responsible for conditions of the jobsite and safety of all persons and property during performance of the work. All construction activity and safety provisions shall conform to all applicable federal, state, and local laws, ordinances and codes.

7. As-built construction drawings shall be performed by a land surveying firm with a land surveyor registered in the State of Indiana. The Contractor shall assist the Owner in preparing the as-built drawings and shall be required to keep an as-built record during construction and information required for preparing such record shall be recorded prior to the backfilling of the underground facility.

8. In case of conflicting specifications, the most restrictive shall apply, unless otherwise approved by TBIRD Design Services, Corp., and any applicable government agency.

9. Any plan conflicts shall be submitted immediately to TBIRD Design Services, Corp. for review.

10. No utility construction shall commence until sufficient earthwork has been completed to meet the minimum cover requirements contained in these plans for all utilities.

11. Upon encountering any field tile, the Contractor shall expose said tile and contact TBIRD Design Services, Corp. immediately for review.

12. Brush, trees, and like material shall be removed as necessary to complete the work in these plans or as may be directed by the Owner. These materials shall be removed from the site. Existing trees on the site shall be preserved at the Owner's discretion.

13. Removal and disposal of debris, existing structures, or other material located on the site shall be at the Owner's direction or as directed in these plans.

14. Topographic and existing site information shown in these plans has been provided by the Owner and the Contractor accepts such information by accepting this contract. If the Contractor believes a significant conflict exists between such topographic information and the actual site conditions, he shall submit a topographic survey completed and certified by a land surveyor registered in the State of Indiana prior to the beginning of any construction at the site for the Owner's review.

    Furthermore, the Contractor shall inform himself of the conditions under which the work is to be performed, the site of the work, the obstacles which may be encountered, and all other relevant matters concerning the work to be performed. The Contractor shall not be allowed any extra compensation by reason of any matter or thing which the Contractor might have fully informed himself, because of his failure to have so informed himself prior to bidding the job.

    It is understood and agreed that the Owner does not warrant or guarantee that the materials and conditions encountered during construction will be the same as indicated by the information shown on these drawings. The Contractor must satisfy himself regarding the character, quantities, and conditions of the various materials and work to be done.

15. Any bonds or insurance required by any governmental agency, utility or other agency for the completed work shall be the responsibility of the Contractor.

16. The construction of and the repair and replacement of existing street surfaces, sidewalks, curbs, lawn areas, parking areas, driveways, fences, and other installations or related items necessary to complete the work in these plans shall also be considered a part of the work unless specifically excepted in the plans. Said construction, repair, or replacement shall be the same kind and quality of material as that found.

    All areas disturbed by the construction process shall be restored to the condition that existed prior to construction, as applicable. Backfilling shall be to the grade of the existing ground level or to the grade as established by the property owner in the event the property owner permits the deposit of excess material upon his land, unless specifically directed otherwise in these plans.

17. Excess material from the excavations or cleared material unsuitable for filling shall not be wasted within the limits of the project without the Owner's permission.

18. The Contractor shall confine his work to the property and construction limits shown in these plans and within applicable public right-of-way and easement limits. If the methods of construction employed by the Contractor are such as to require the use of any additional land, he shall make his own arrangements with the property owners affected for the use of such additional land.

19. Unless otherwise specified, all materials and equipment installed on the project shall be new and both workmanship and material shall be of good quality. Manufactured materials and equipment shall be applied, installed and constructed as directed by the manufacturer's guidelines and recommendations. Wherever proprietary equipment is specified or "approved equal" is implied, all proposals for substitution shall be submitted to the appropriate agency in writing for their approval.

20. Elevations of all existing facilities shall be field verified by the Contractor prior to the start of construction.

BACKFILL AND REMOVAL OF MATERIALS

1. Granular material shall be used for backfill in all areas where the construction is within the pavement or sidewalk area or within five feet from back of curb (to the leading edge of the trench), and elsewhere as indicated upon these plans.

2. Where granular material is used for backfill, all excavated material shall be removed and shall not be wasted within the limits of the project without the Owner's permission.

PERMITS

1. The Contractor will obtain any necessary entrance permit from the City of West Lafayette for any entrance (temporary or permanent) to the project from a public road. The Contractor shall be responsible for any local permits required for construction in public right-of-way or any other permits required by the local regulatory agencies to complete the construction as detailed in these plans.

EARTHWORK

1. All earthwork shall be in accordance with Section 200 of the current INDOT Standard Specifications with the exception that building pads shall be compacted to a minimum of 98% of their maximum dry density in accordance with AASHTO T-99. Adequacy of pavement subgrade and building pads shall be determined by a representative of the County Highway Department or Owner, as applicable, based on a Contractor performed proofroll. A proofroll shall be performed on all street subgrade prior to placing stone or pavement and installing curb. The Contractor shall be responsible for subgrade work necessary to pass said proofroll.

2. Contractor shall strip topsoil such that the root mass from the existing vegetation is removed and such that there is sufficient topsoil for final respread. All areas of earthwork activity shall be stripped of topsoil and stockpiled on site at a location designated in these plans or as prescribed by the Owner.

3. The Contractor shall undercut all areas outside of pavement and building areas by a minimum depth of 6-inches to allow for topsoil replacement. Contractor shall place 6-inches minimum of topsoil in all areas outside of pavement or building areas. These areas shall be immediately seeded and mulched in accordance with these plans.

4. Permanent seeding in accordance with these plans shall be required as indicated on the Stormwater Pollution Prevention Plan. Temporary seeding shall generally be required in all areas where permanent seeding is not required. See Stormwater Pollution Prevention Plan for further details. Contractor shall be responsible for adequate growth and cover of all seeding (temporary or permanent) as specified in these plans and shall be required to provide additional seed and mulch if growth and cover is not acceptable to the Owner.

5. Trenching for all pipe shall be accomplished in accordance with these plans with the sides kept nearly as vertical as possible. Ledge rock, boulders, and large stones shall be removed to provide a minimum clearance as shown on the bedding details in these plans on all sides of all pipes. All water entering the excavations or other parts of the work shall be removed until all the work has been completed. No pipe shall be used for the disposal of trench water. Excavations shall be kept free from water until the structures to be built therein are completed and will safely withstand forces from said water. The Contractor shall provide sufficient dewatering equipment and make necessary arrangements for the disposal of said water without undue interference with other work or damage to property.

6. Sufficient sheeting, shoring and bracing shall be provided by the Contractor to ensure safety of the workmen and wherever it is necessary to protect and preserve life, structures and property and complete the work in these plans. The design and installation of such devices shall be completed under the direct supervision of a qualified individual experienced in such work.

7. Contractor shall be responsible for grading the site in accordance with the Grading and Drainage plans contained in this construction set. Any remaining topsoil stockpiles and overburden material shall be removed from the site upon completion of the project unless otherwise designated in the plans or directed by the Owner. Contractor shall not be allowed any extra compensation for satisfying this specification because of his failure to clarify this subject prior to accepting the job, specifically excepting such work from his bid, or providing a separate and additional bid item for such work as may be required elsewhere in these plans or specifications.

8. Construction as-built drawings shall include as-built elevations for all major drainage swales and emergency route elevations.

STREET

1. All materials and construction within existing or proposed rights-of-way shall comply with the requirements of the City of West Lafayette and INDOT as applicable.

2. Trenches under paved areas (excluding sidewalks) for sewer, water, or utility conduit shall be backfilled with granular material per Section 211 of the current INDOT Standard Specifications and compacted in lifts. Granular material to extend five feet beyond the limits of the paved area with a 1:1 slope to the bottom of the trench.

3. All excavation within 5 feet of back of curb to be backfilled with granular material compacted in 6" lifts. See other specifications and construction details in these plans for further details.

4. Subgrade shall extend to a minimum of one-foot behind the back of curb or edge of pavement and shall be approved by a representative of the Owner prior to paving operations. All soft, yielding or other unsuitable material within the roadway area which will not compact readily shall be removed and replaced with suitable material.

5. Edge of all existing pavement shall be painted with AE-T Tack Coat prior to paving operations.

6. Concrete pavement shall be portland cement jointed plain concrete pavement as specified in these construction plans and shall be constructed in accordance with Section 500 of the current INDOT Standard Specifications.

7. Bituminous pavements shall be constructed in accordance with Section 400 of the current INDOT Standard Specifications.

8. Tack coats shall be applied immediately prior to placing the bituminous base and surface courses, respectively, as shown in these plans. Tack coats shall also be applied to the inside face of curbs and shall not remain exposed overnight. Tack coat shall be cleaned from all exposed and finished concrete surfaces.

9. Curbing shall be constructed of portland cement concrete to the dimensions shown in these plans and in accordance with Section 605 of the current INDOT Standard Specifications. When used with bituminous pavement, curb joint spacing shall be 10 feet. When used with concrete pavement, curb joints shall be aligned with main slab joints. Curb joints shall be filled with hot poured joint sealant in accordance with Section 906.02 of said specifications. Curb ends shall be tapered at a rate to execute to total taper in 10 feet to provide a smooth finish at all terminations of the curb (as applicable).

STORM SEWER

1. All materials and construction of the storm sewer will comply with the requirements of the City of West Lafayette. Installation shall be in accordance with Section 715 of the current INDOT Standard Specifications. Bedding and backfill shall be as designated in these plans.

2. PVC pipe that is 18-inches in diameter through 24-inches in diameter shall meet the requirements of ASTM F-679 SDR-35 (minimum pipe stiffness of 46 psi). PVC pipe that is 15-inches in diameter or less shall meet the requirements of ASTM D-3034 SDR-35 (minimum pipe stiffness of 46 psi). Joints shall be gasketed, bell and spigot type with the bell made integral with the pipe.

SANITARY SEWER

1. All construction of sanitary sewer mains and laterals will meet the minimum requirements of the City of West Lafayette and the Indiana Department of Environmental Management. Installation shall be in accordance with Section 715 of the current INDOT Standard Specifications and ASTM D-2321. Bedding and backfill shall be as designated in these plans. See City of Lafayette details sheets contained herein for further specifications and details.

2. The Contractor will meet the requirements of the City of West Lafayette, who will accept maintenance of the sanitary sewer main.

3. Prior to the start of construction, the Contractor shall verify with the Owner that all necessary permits have been obtained.

4. Requests for inspection shall be made in a timely and regular manner to the City of West Lafayette. Contractor shall keep a written log of all requests for inspections and actual inspections made and by whom.

5. All new pipe connections into existing structures shall be fitted with a Kor-N-Seal boot assembly with a stainless steel tightening band. Pipe shall be grouted in place inside the manhole.

6. The Contractor shall keep a record during construction and furnish to the representative of the Owner, upon request, a copy of the information for preparation of as-built construction plans (i.e. lateral length, depth, and location) in case lateral markers and the like are destroyed throughout the construction process.

7. See City of West Lafayette Sanitary Sewer Details and Specifications for further information and testing requirements.

WATER

1. Materials and construction of the watermain, water services, fire hydrants, valves, and other appurtenances shall conform to the minimum requirements of the Indiana American Water Company.

2. All water main and service laterals shall maintain a minimum cover of 5 feet and shall generally pass above all crossings with sanitary sewer and below all crossings with storm sewer maintaining a minimum vertical separation of 18-inches. See plan and profiles for specific crossings.

3. Meters shall not be placed by the Contractor. The installation of said equipment will be the responsibility of the Indiana American Water Company. Vaults will be responsibility of the Contractor.

4. The Contractor shall be responsible for the one-year warranty required by Indiana-American Water Company for the installation cost of the watermain approved by Indiana-American Water Company.

5. The Contractor shall keep a record during construction and furnish to the representative of the Owner, upon request, a copy of the information for preparation of as-built construction plans (i.e. depths, 3D locations and identification of all hydrants, valves, tee, bends, etc).

6. Indiana-American Water Company standards and specifications have been included on separate sheets in this construction set for the convenience of the Contractor; however, these specifications are not all-inclusive and have been taken directly from the Developer Packet for Water Main Extensions published by Indiana-American Water Company, Inc., except minor modifications have been made to incorporate local cover requirements and standards stipulated by the local water company. Contractor is responsible for meeting all Indiana-American Water Company standards and shall consult said handbook for further details. Copies are available from Indiana-American Water Company, Inc. Materials and construction of the watermain, water services, fire hydrants, valves, and other appurtenances shall conform to the minimum requirements of the City of West Lafayette. See City of West Lafayette Watermain Typical Details and Notes for further details and testing.

TBIRD
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • Lafayette, Indiana
phone: (765) 742-1800 • fax: (765) 742-1805
www.tbirddesign.com

CERTIFIED BY:

JUSTIN R. FRAZIER
REGISTERED
NO. 10606088
STATE OF INDIANA
PROFESSIONAL ENGINEER

04/29/14

225 NORTHWESTERN AVENUE
PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION

PROJECT NO: 13080
FILE: 13080-GENERAL.DWG
DRAWN BY: JRF
CHECKED BY: TRB

LOCATION:

A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:

SPECIFICATIONS

G003

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\FINAL PLANS\PLOT\13080-GENERAL.dwg - USER: JUSTIN FRAZIER - DATE: Tuesday, April 29, 2014 12:55:34 PM

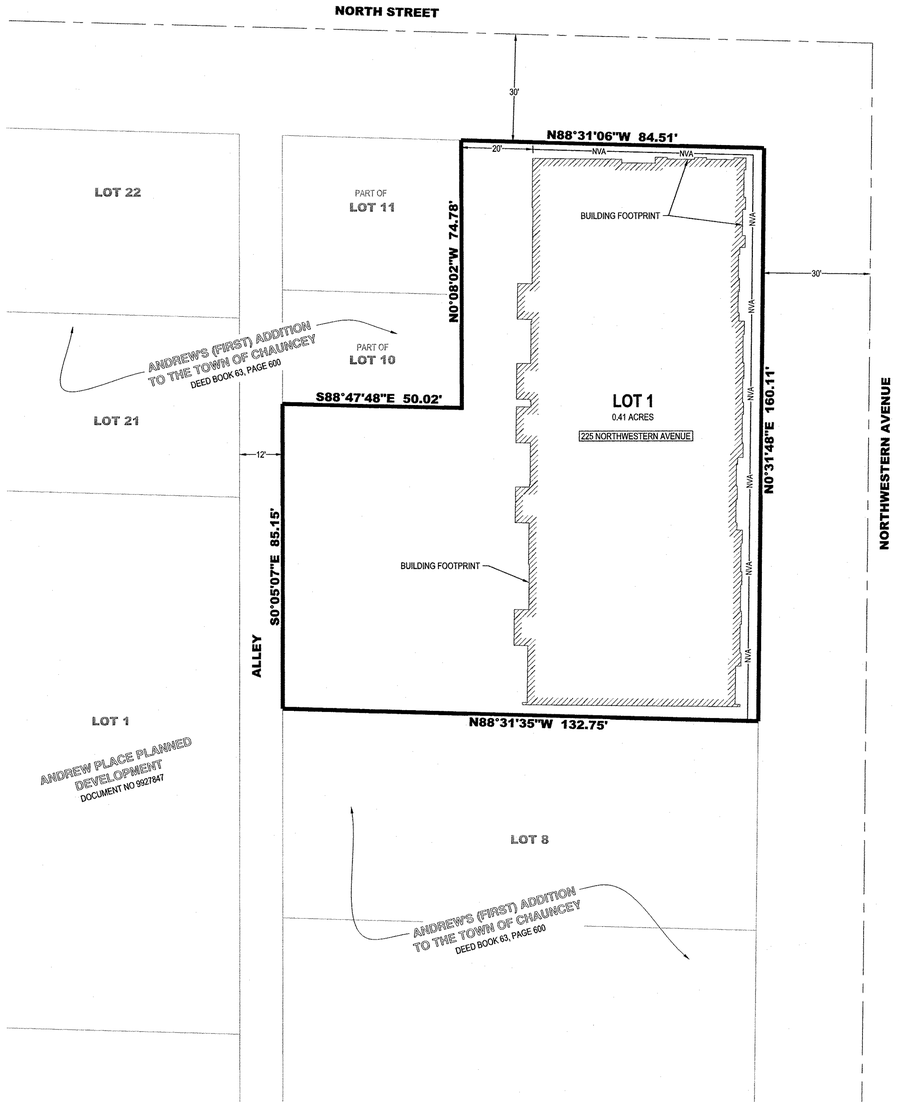



NVA = NO VEHICULAR ACCESS

FINAL PLAT

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

A PART OF THE NORTHEAST QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

LEGAL DESCRIPTION

Lots Numbered Nine (9), Ten (10), and Eleven (11) in Andrews First Addition to the Town, now City of West Lafayette, Tippecanoe County, Indiana, being a part of the East Half of the Northeast Quarter of Section Nineteen (19), in Township Twenty-three (23) North, Range Four (4) West.

EXCEPT a part of said lots described as follows: BEGINNING at the northwest corner of Lot Numbered Eleven (11) and running thence East along the north line of said Lot a distance of fifty (50) feet; thence South parallel with the west line of said Lots a distance of seventy-five (75) feet; thence West parallel with the north line of said Lot Numbered Eleven (11) a distance of fifty (50) feet to the west line of said Lot Numbered Ten (10); thence North along the west line of Lots Numbered Ten (10) and Eleven (11) to the PLACE OF BEGINNING.

Containing in all 0.41 acres ,more or less.

SUBJECT TO ALL EASEMENTS ,RESTRICTIONS ,AND RIGHTS-OF-WAY OF RECORD

LAST INSTRUMENT CONVEYING TITLE TO SUBJECT PROPERTY :

Title Holder: Casey Rentals, LLC
Document Number: 201313016628
Key Number: 79-07-19-286-003.000-026 (164-02600-0556)

LAND SURVEYOR'S CERTIFICATE

I, the undersigned, hereby certify that I am a registered land surveyor of the State of Indiana; that this plat correctly represents a survey completed by me, that all the monuments shown thereon actually exist, and their location, size, type and material are accurately shown; that the computed error of closure of the boundary survey is not more than 1' in 10,000'; and that this plat complies with the planned development provisions of the Unified Zoning Ordinance.

CERTIFIED BY: Justin R. Frazier — Date: 4/29/14

SURVEY NOTE

This drawing does not represent a boundary survey of the property depicted. This plat has been prepared pursuant to Section B-3 (Final Plats for PD Submissions), of the Unified Zoning Ordinance of Tippecanoe County, Indiana as adopted January 2, 1998 (amended) and is based on survey work by TBIRD Design Services, Corporation, Job Number 13080.

DEDICATION CERTIFICATE

I or We the undersigned,Casey Rentals, LLC, owner(s) of the real estate shown and described herein, do hereby lay off, plat and subdivide said real estate in accordance with the herein plat.

This planned development shall be known as 225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT, an addition to Wabash Township, West Lafayette, Tippecanoe County, Indiana. All public streets and alleys and open spaces shown and not heretofore dedicated are hereby dedicated to the public.

EASEMENTS - Easements for the installation and maintenance of utilities and drainage facilities are reserved as shown on the recorded plat. Unless otherwise negotiated as part of the PD process, within these easements, no structure, planting, or other material shall be placed or permitted to remain. The easement area of each lot, and all improvements in it shall be maintained continuously by the owner of the lot, except for those improvements for which a public authority or utility company is responsible.

DRAINAGE - In the event storm water drainage from any lot or lots flows across another lot, provision shall be made to permit such drainage to continue, without restrictions or reduction, across downstream lot or lots and into existing or proposed culverts, storm sewer, or natural or man-made drainage channels or courses, even though no specific drainage easement for such flow of water is provided on the final plat for the planned development.

The foregoing covenants (or restrictions) are to run with the land and shall be binding on all parties and all persons claiming under them for 10 years, at which time said covenants (or restrictions) shall be automatically extended for successive periods of five years, unless by vote of a majority of the then owners of the building sites covered by these covenants (or restrictions), it is agreed to change such covenants (or restrictions) in whole or in part.

Invalidation of any one of the foregoing covenants (or restrictions) by judgment or court order shall in no wise affect any of the other covenants (or restrictions) which shall remain in full force and effect.

The right to enforce these provisions by injunction, together with the right to cause the removal by due process of law of any structure or part thereof erected or maintained in violation hereof, is hereby dedicated to the public, and reserved to the owner of the lot in this planned development and to his heirs and assigns.

WITNESS MY HAND AND SEAL THIS 29TH DAY OF APRIL, 2014.

Casey Rentals, LLC,

By: Carol W. Casey
Carol W Casey, its managing member

STATE OF INDIANA)
) SS:
COUNTY OF TIPPECANOE)

Whitney Elyse Kalmon
Notary Public
Seal
Tippecanoe County, State of Indiana
Commission No. 629547
My Commission Expires September 19, 2019

Before me, the undersigned, a Notary Public in and for said County and State, personally appeared Carol W. Casey, and acknowledged the execution of this instrument this 29th day of April, 2014.

Whitney Elyse Kalmon
Notary Public

TBIRD Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • LAFAYETTE, INDIANA
phone: (765) 742-1900 • fax: (765) 742-1905
www.tbirddesign.com

CERTIFIED BY:

JUSTIN R. FRAZIER REGISTERED NO 20600035 STATE OF INDIANA LAND SURVEYOR

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION
2	4/16/14	SHEET ADDED

PROJECT NO: 13080
FILE: 13080-SURVEY FP.DWG
DRAWN BY: JRF
CHECKED BY: TRB
LOCATION: A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA
TITLE: FINAL PLAT

V100

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\SURVEY\13080-SURVEY FP.dwg - USER: JUSTIN FRAZIER - DATE: Tuesday, April 29, 2014 9:40:57 AM

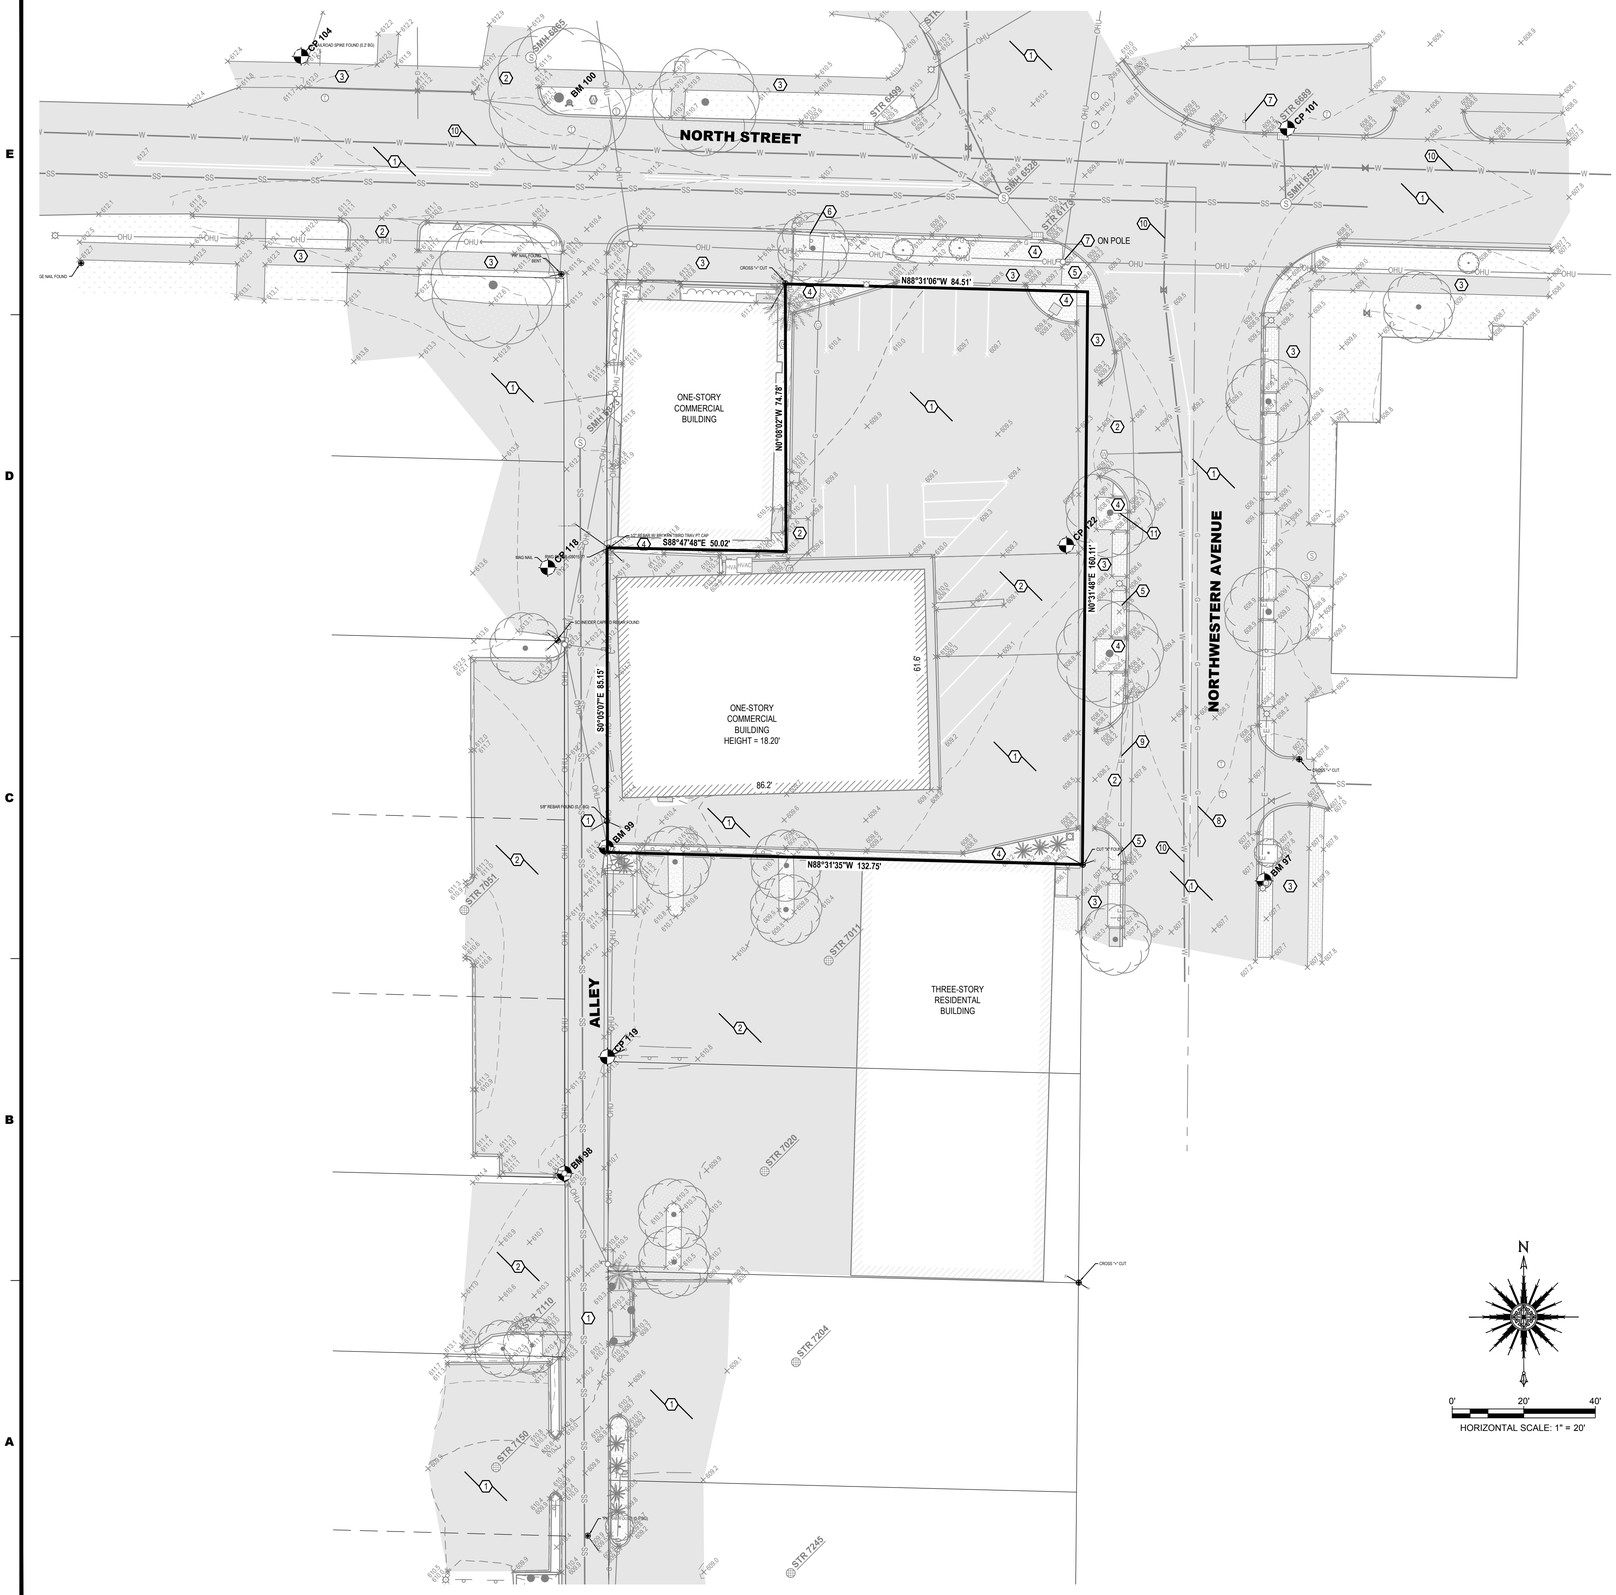
NORTH STREET
NORTHWESTERN AVENUE
ALLEY
ONE-STORY COMMERCIAL BUILDING
ONE-STORY COMMERCIAL BUILDING HEIGHT = 18.20'
THREE-STORY RESIDENTAL BUILDING
CP 104
BM 100
CP 101
CP 118
CP 22
BM 99
BM 97
BM 98
CP 119
ON POLE
N88°31'06"W 84.51'
N0°16'02"W 74.78'
S88°47'48"E 50.02'
N0°31'48"E 150.11'
S0°05'07"E 85.15'
N88°31'35"W 132.75'
91.9'
86.2'
STR 6173
STR 6528
STR 6499
STR 6689
STR 7053
STR 7011
STR 7020
STR 7110
STR 7204
STR 7150
STR 7245
SMH 6525
SMH 6526
SMH 6527
SMH 6528
SMH 6529
SMH 6530
SMH 6531
SMH 6532
SMH 6533
SMH 6534
SMH 6535
SMH 6536
SMH 6537
SMH 6538
SMH 6539
SMH 6540
SMH 6541
SMH 6542
SMH 6543
SMH 6544
SMH

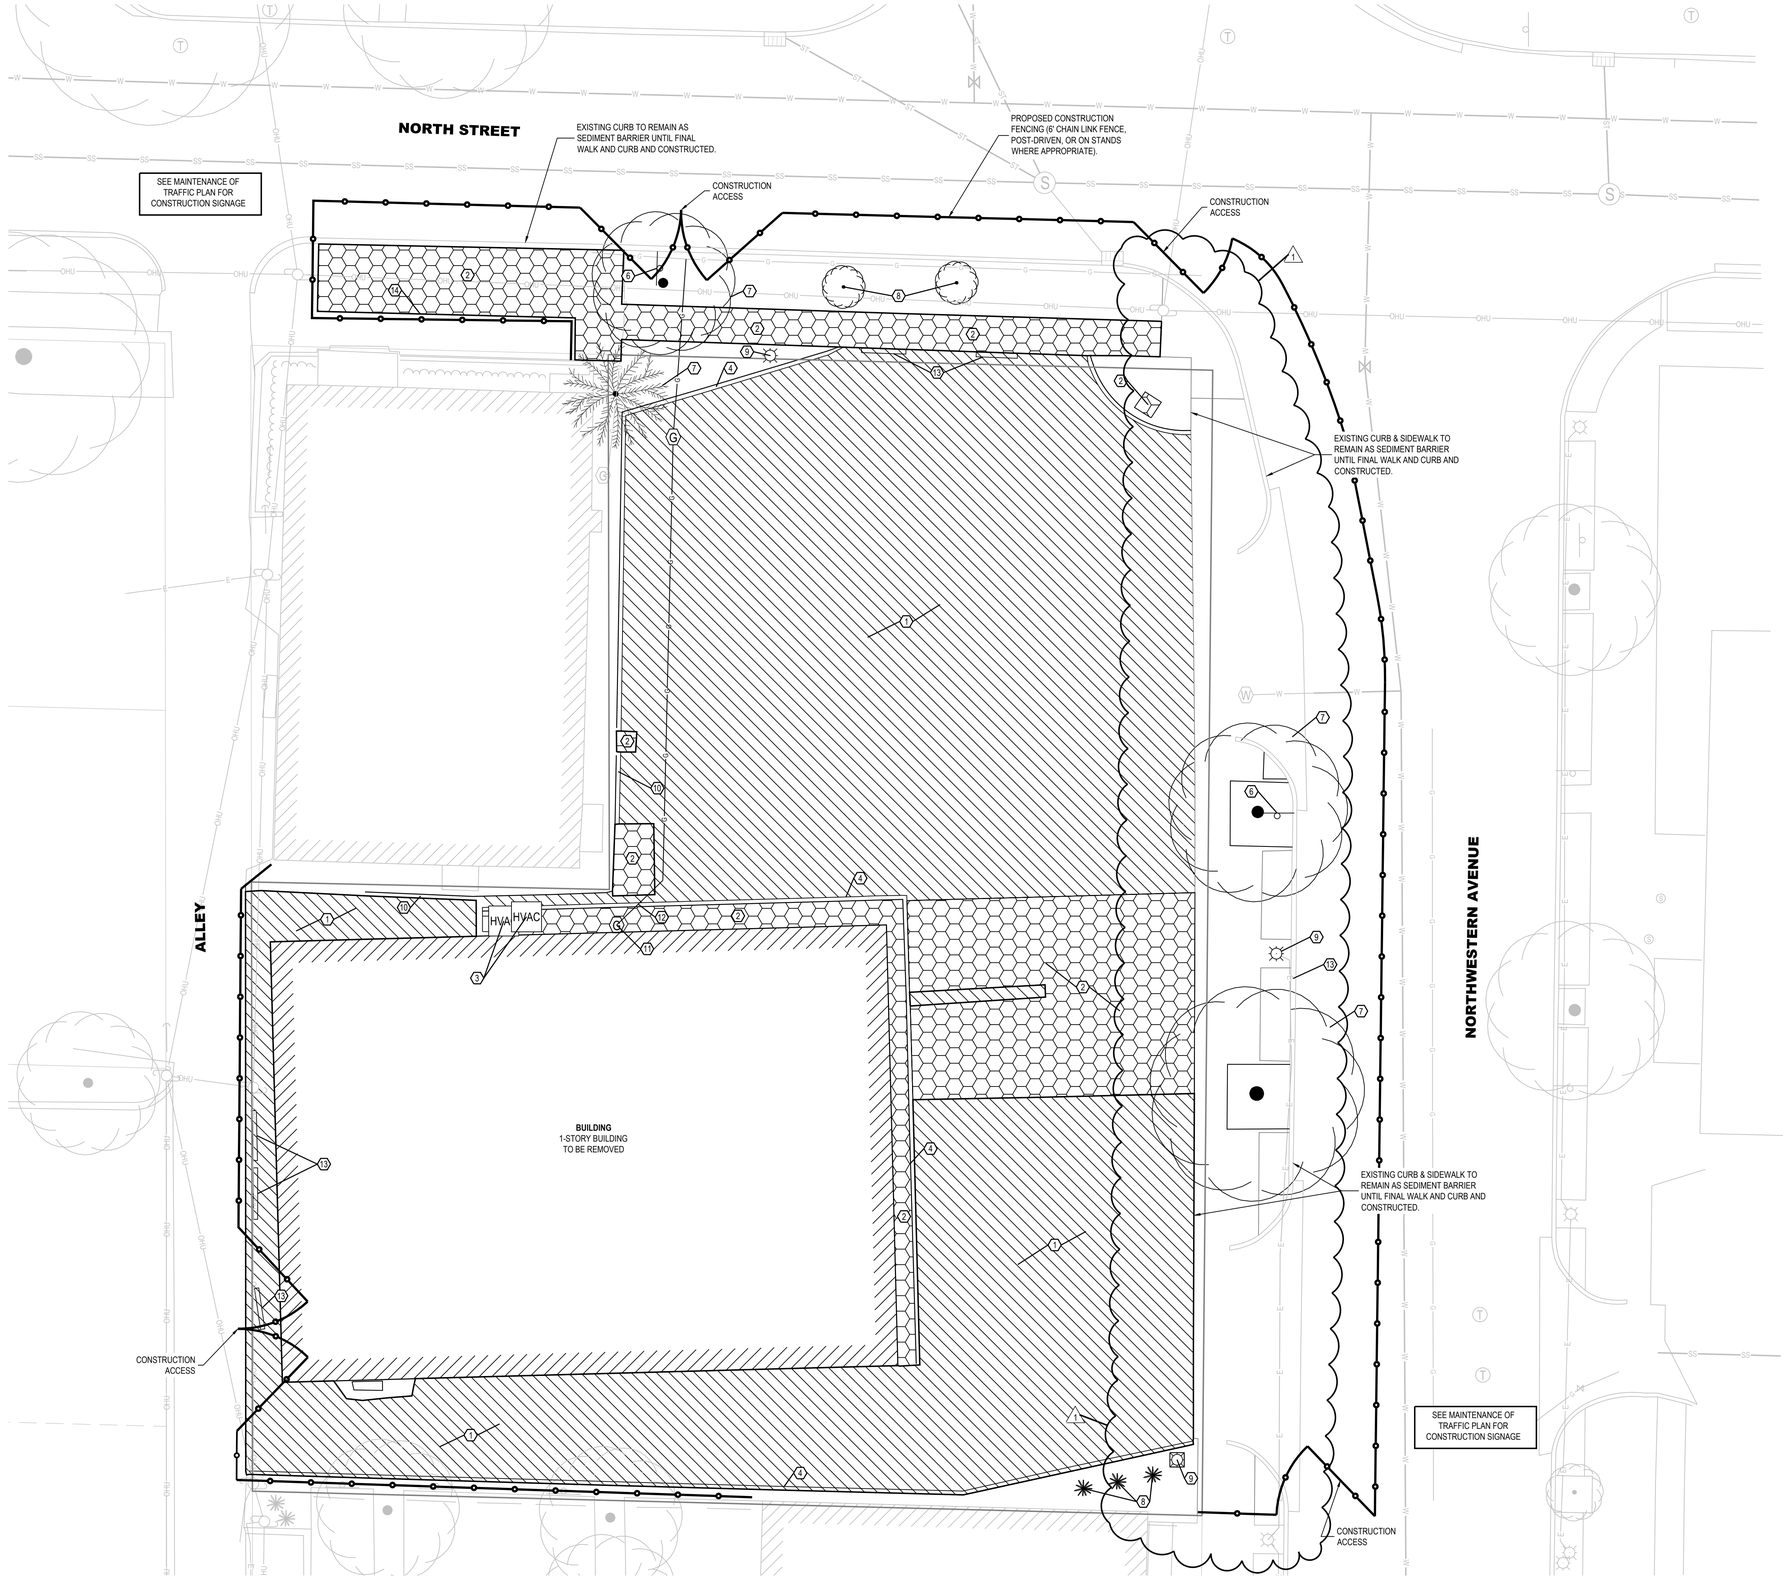

N

0' 10' 20'

HORIZONTAL SCALE: 1" = 10'

NOTES

1	CONTRACTOR SHALL COORDINATE WITH UTILITY COMPANIES (WATER, GAS, ELECTRIC, CABLE, PHONE) TO ENSURE THAT ALL SERVICE LINES HAVE BEEN TERMINATED APPROPRIATELY PRIOR TO DEMOLITION.
2	THE SIZE AND LOCATION OF EXISTING UTILITIES SHOWN HEREON ARE BASED ON A TOPOGRAPHIC SURVEY BY TBIRD DESIGN SERVICES, CORP, DATED DECEMBER 19, 2013.
3	ALL DEMOLITION AND CONSTRUCTION ACTIVITY ON THIS SITE SHALL BE PERFORMED IN COMPLIANCE WITH APPLICABLE OSHA STANDARDS.
4	CONTRACTOR SHALL PROTECT ALL EXISTING UTILITY LINES AND STRUCTURES UNLESS OTHERWISE INDICATED. CONTRACTOR SHALL CONTACT ENGINEER AND OWNER REPRESENTITIVE REGARDING ANY UTILITIES DISCOVERED THAT HAVE NOT BEEN IDENTIFIED ON THESE PLANS.
5	CONTRACTOR TO REMOVE UNSUITABLE SOIL AND DEBRIS FROM THE SITE AS DETERMINED AND DIRECTED BY THE OWNER.

KEYNOTES

1	REMOVE ASPHALT PAVEMENT
2	REMOVE CONCRETE
3	REMOVE HVAC
4	REMOVE CONCRETE CURB
~~5~~	~~REMOVE BRICK PAVERS~~
6	REMOVE SIGN
7	REMOVE TREE
8	REMOVE SHRUB
9	REMOVE LIGHT POLE AND ASSOCIATED SERVICE LINE
10	REMOVE ASPHALT CURB
11	REMOVE GAS METER
12	REMOVE GAS LINE
13	REMOVE CONCRETE WHEEL STOP
14	FULL DEPTH SAWCUT

TBIRD
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • Lafayette, Indiana
phone: (765) 742-1800 • fax: (765) 742-1805
www.tbirddesign.com

CERTIFIED BY:

JUSTIN R. FRAZIER
REGISTERED
NO. 10606088
STATE OF INDIANA
PROFESSIONAL ENGINEER

04/29/14

225 NORTHWESTERN AVENUE
PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION
1	4/7/14	SITE REVISIONS

PROJECT NO: **13080**
FILE: 13080-DEMO-PH1.DWG
DRAWN BY: JRF
CHECKED BY: TRB

LOCATION:
A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:
DEMOLITION PLAN
PHASE 1

V102

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS FINAL PLANS\PLOT\13080-DEMO-PH1.dwg USER: JUSTIN FRAZIER DATE: Tuesday, April 29, 2014 12:55:41 PM

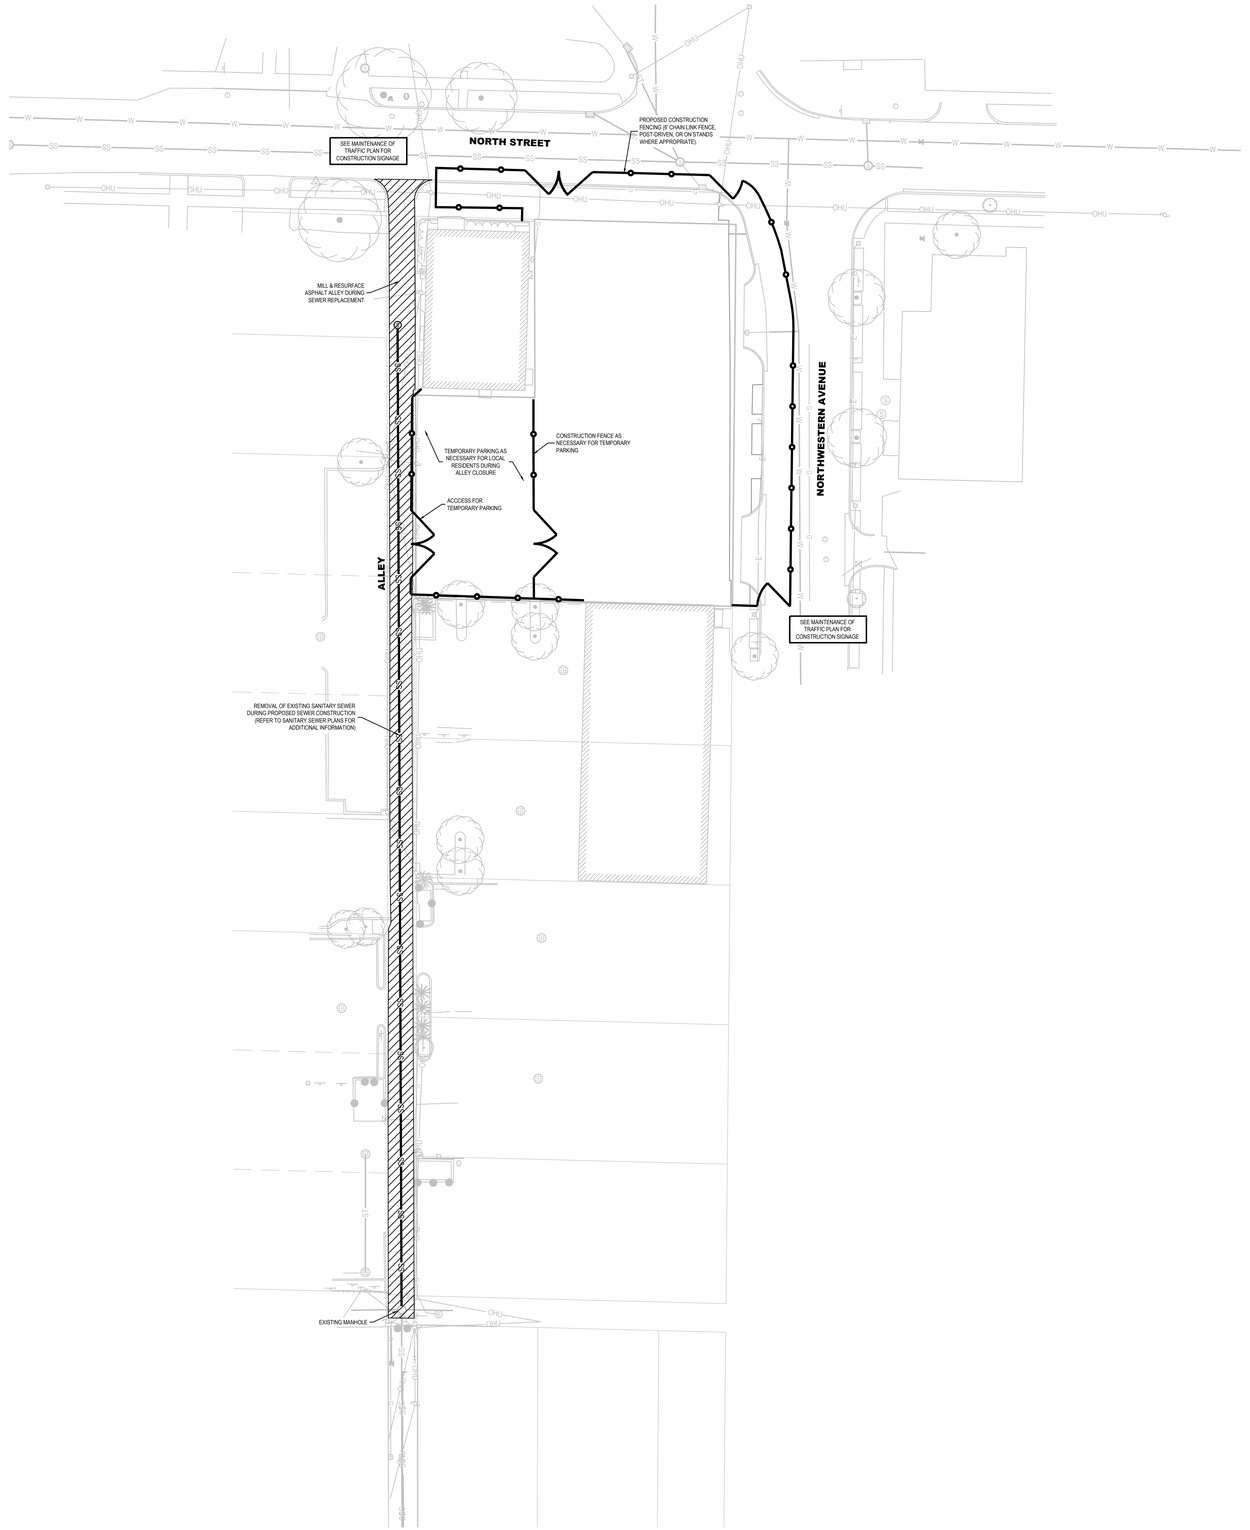

N

0' 30' 60'

HORIZONTAL SCALE: 1" = 30'

NOTES

1	CONTRACTOR SHALL COORDINATE WITH UTILITY COMPANIES (WATER, GAS, ELECTRIC, CABLE, PHONE) TO ENSURE THAT ALL SERVICE LINES HAVE BEEN TERMINATED APPROPRIATELY PRIOR TO DEMOLITION.
2	THE SIZE AND LOCATION OF EXISTING UTILITIES SHOWN HEREON ARE BASED ON A TOPOGRAPHIC SURVEY BY TBIRD DESIGN SERVICES, CORP, DATED DECEMBER 19, 2013.
3	ALL DEMOLITION AND CONSTRUCTION ACTIVITY ON THIS SITE SHALL BE PERFORMED IN COMPLIANCE WITH APPLICABLE OSHA STANDARDS.
4	CONTRACTOR SHALL PROTECT ALL EXISTING UTILITY LINES AND STRUCTURES UNLESS OTHERWISE INDICATED. CONTRACTOR SHALL CONTACT ENGINEER AND OWNER REPRESENTITIVE REGARDING ANY UTILITIES DISCOVERED THAT HAVE NOT BEEN IDENTIFIED ON THESE PLANS.
5	CONTRACTOR TO REMOVE UNSUITABLE SOIL AND DEBRIS FROM THE SITE AS DETERMINED AND DIRECTED BY THE OWNER.

TBIRD
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • LAFAYETTE, INDIANA
phone: (765) 742-1800 • fax: (765) 742-1805
www.tbirddesign.com

CERTIFIED BY:

JUSTIN R. FRAZIER
REGISTERED
NO. 10606088
STATE OF INDIANA
PROFESSIONAL ENGINEER

04/29/14

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION
1	4/7/14	UPDATE PLAN VIEW

PROJECT NO:	13080
FILE:	13080-DEMO-PH2.DWG
DRAWN BY:	JRF
CHECKED BY:	TRB

LOCATION:

A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:

DEMOLITION PLAN

PHASE 2

V103

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\FINAL PLANS\PLOT\13080-DEMO-PH2.dwg USER: JUSTIN FRAZIER DATE: Tuesday, April 29, 2014 12:55:57 PM

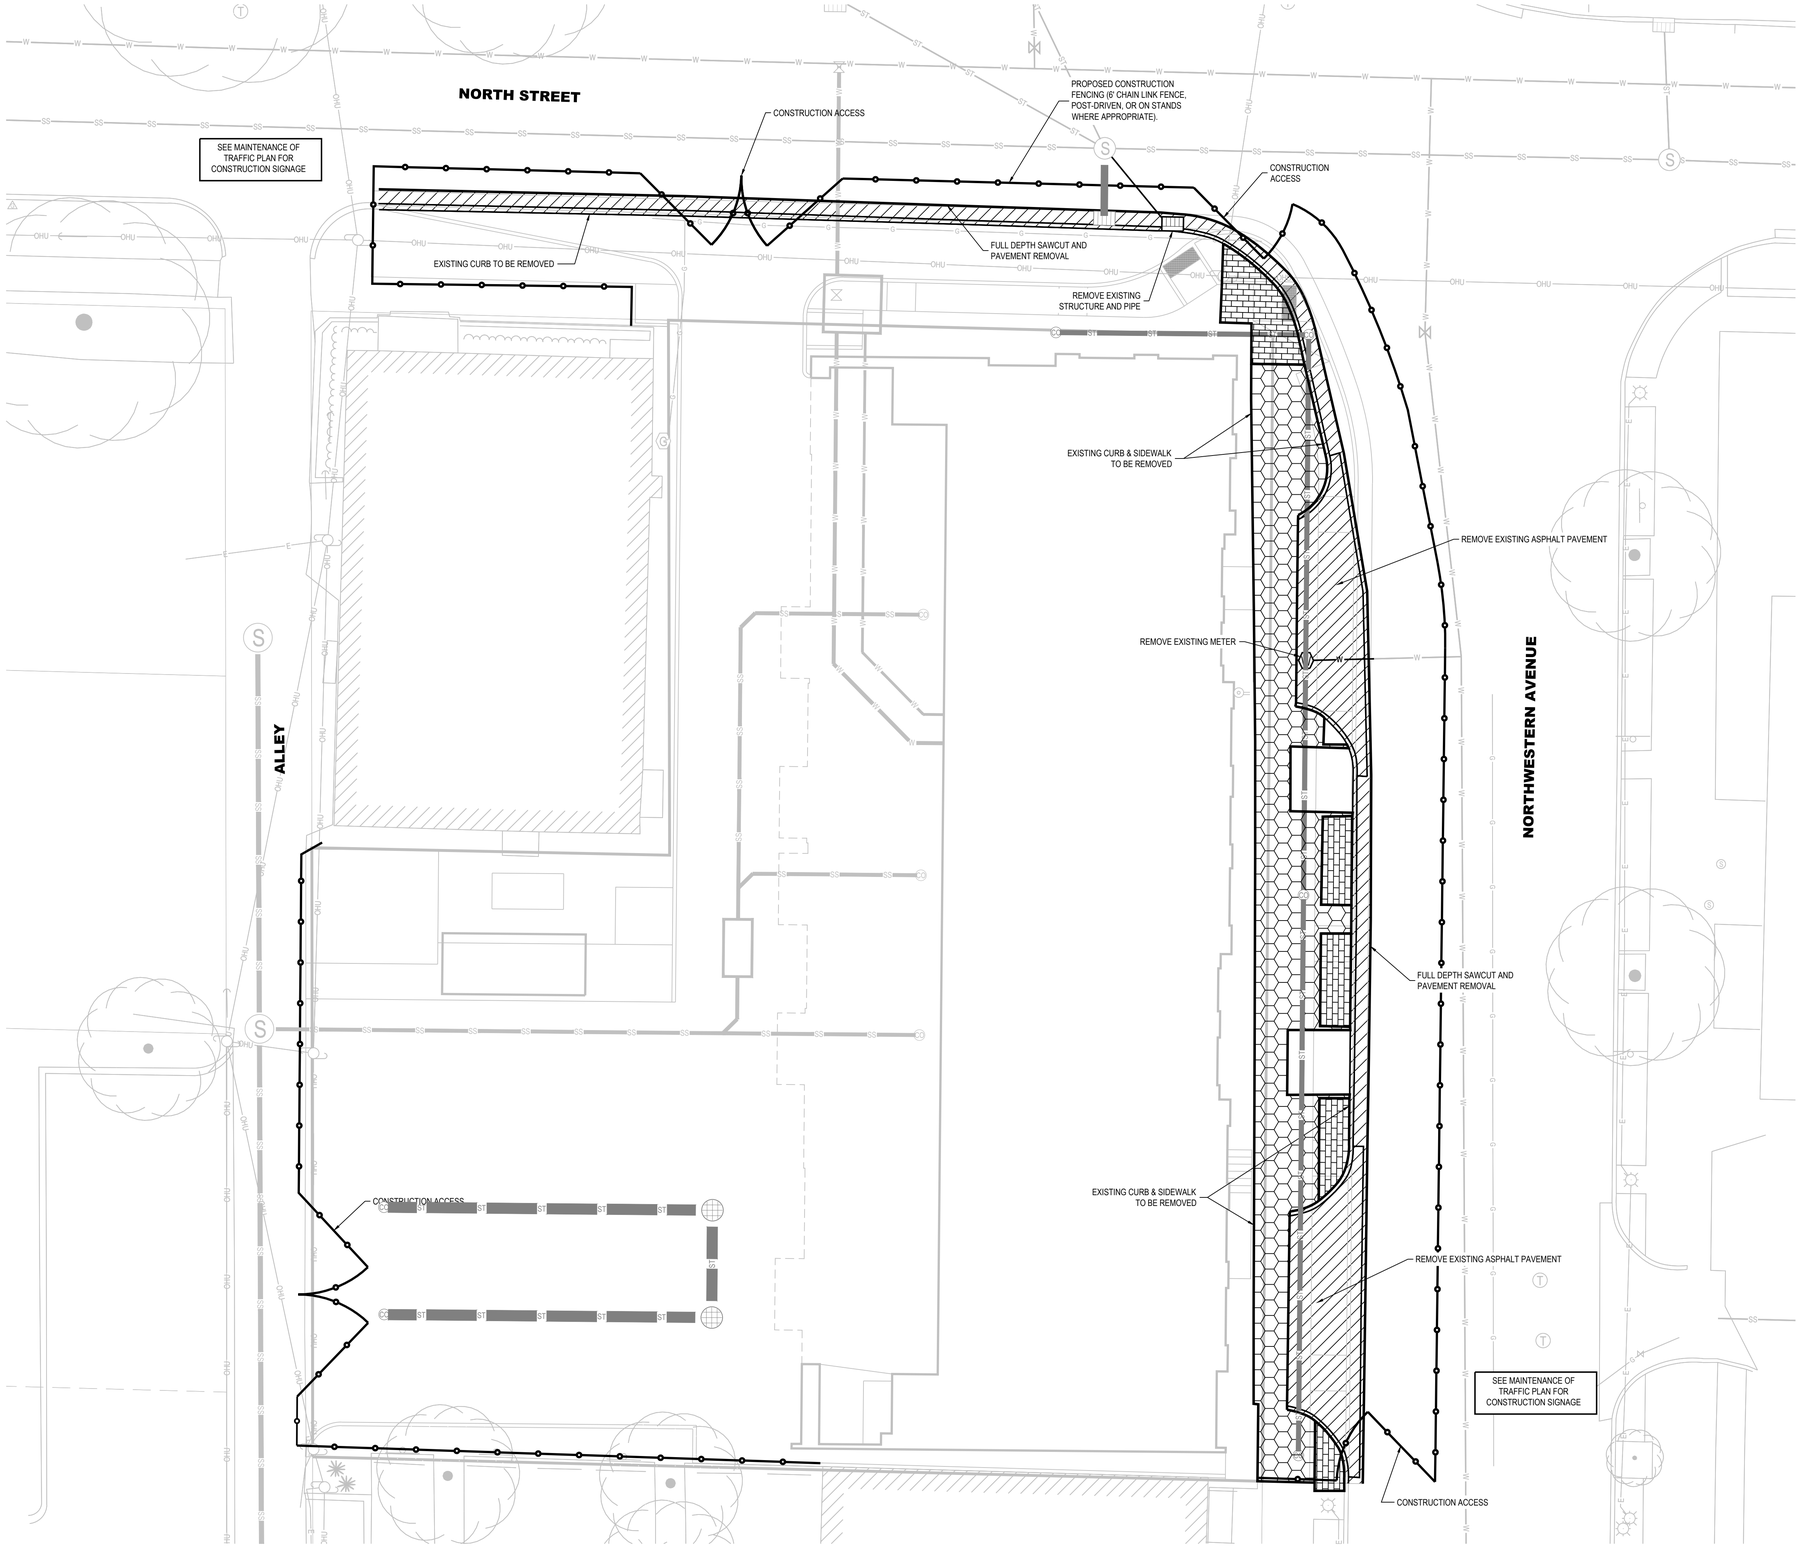

N

0' 10' 20'

HORIZONTAL SCALE: 1" = 10'

NOTES

1	CONTRACTOR SHALL COORDINATE WITH UTILITY COMPANIES (WATER, GAS, ELECTRIC, CABLE, PHONE) TO ENSURE THAT ALL SERVICE LINES HAVE BEEN TERMINATED APPROPRIATELY PRIOR TO DEMOLITION.
2	THE SIZE AND LOCATION OF EXISTING UTILITIES SHOWN HEREON ARE BASED ON A TOPOGRAPHIC SURVEY BY TBIRD DESIGN SERVICES, CORP, DATED DECEMBER 19, 2013.
3	ALL DEMOLITION AND CONSTRUCTION ACTIVITY ON THIS SITE SHALL BE PERFORMED IN COMPLIANCE WITH APPLICABLE OSHA STANDARDS.
4	CONTRACTOR SHALL PROTECT ALL EXISTING UTILITY LINES AND STRUCTURES UNLESS OTHERWISE INDICATED. CONTRACTOR SHALL CONTACT ENGINEER AND OWNER REPRESENTITIVE REGARDING ANY UTILITIES DISCOVERED THAT HAVE NOT BEEN IDENTIFIED ON THESE PLANS.
5	CONTRACTOR TO REMOVE UNSUITABLE SOIL AND DEBRIS FROM THE SITE AS DETERMINED AND DIRECTED BY THE OWNER.

TBIRD
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • Lafayette, Indiana
phone: (765) 742-1800 • fax: (765) 742-1805
www.tbirddesign.com

CERTIFIED BY:

JUSTIN R. FRAZIER
REGISTERED
NO. 10606088
STATE OF INDIANA
PROFESSIONAL ENGINEER

04/29/14

225 NORTHWESTERN AVENUE
PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION
3	4/18/14	UPDATE PLAN VIEW
1	4/7/14	SITE REVISIONS

PROJECT NO:	13080
FILE:	13080-DEMO-PH3.DWG
DRAWN BY:	JRF
CHECKED BY:	TRB

LOCATION:

A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:

DEMOLITION PLAN

PHASE 3

V104

FILE: P:\2013\13080.225 Northwestern Avenue\DRAWINGS\PLANS\FINAL PLANS\PLOT\13080-DEMO-PH3.dwg USER: JUSTIN FRAZIER DATE: Tuesday, April 29, 2014 1:25:10 PM

TBIRD
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th STREET • LAFAYETTE, INDIANA
phone: (765) 742-1900 • fax: (765) 742-1905
www.tbirddesign.com

CERTIFIED BY:

JUSTIN R. FRAZIER
REGISTERED
NO. 10606088
STATE OF INDIANA
PROFESSIONAL ENGINEER

04/29/14

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

N

0' 60' 120'

HORIZONTAL SCALE: 1" = 60'

NOTES

1	CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL OF ALL EXISTING LANE MARKINGS WHICH ARE IN CONFLICT (IF ANY) WITH PROPOSED TEMPORARY LANE MARKINGS SHOWN HEREON. UPON THE COMPLETION OF CONSTRUCTION, TEMPORARY LANE MARKINGS SHALL BE REMOVED AND EXISTING LANE MARKINGS SHALL BE RESTORED TO THEIR ORIGINAL CONDITION. ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH INDIANA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
2	CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL, RELOCATION, OR MASKING OF EXISTING SIGNS WHICH ARE IN CONFLICT WITH THE LANE MARKINGS OR SIGNAGE OF THE TRAFFIC MAINTENANCE PLAN.
3	CONTRACTOR SHALL BE RESPONSIBLE FOR ANY NECESSARY ADJUSTING OR MASKING OF EXISTING TRAFFIC SIGNALS WHICH ARE IN CONFLICT WITH THE LANE MARKINGS OR SIGNAGE OF THE TRAFFIC MAINTENANCE PLAN. UPON REMOVAL OF TEMPORARY TRAFFIC CONTROL, ALL SIGNALIZATION SHALL BE RESTORED TO ITS ORIGINAL CONDITION.
4	TYPE A WARNING LIGHTS ARE REQUIRED ON ALL CONSTRUCTION SIGNS.
5	CONSTRUCTION ACTIVITIES LOCATED BEYOND LIMITS OF CONSTRUCTION FENCING AND / OR CONCRETE BARRIER WALL (SUCH AS ROADWAY RESURFACING AND UTILITY WORK) SHALL BE PERFORMED NEAREST TO PROJECT COMPLETION, UNDER TRAFFIC CONDITIONS, AND IN ACCORDANCE WITH INDIANA DEPARTMENT OF TRANSPORTATION STANDARDS AND SPECIFICATIONS.
6	THE EXACT SIGNAGE AND FINAL LOCACTION OF PERMANENT SIGNS SHALL BE LAID-OUT IN THE FIELD AND APPROVED BY THE CITY OF WEST LAFAYETTE ENGINEER. ALL SIGNAGE AND PAVEMENT MARKINGS SHALL BE PER THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD).
7	THIS PLAN MAY BE MODIFIED AS REQUIRED BY THE CITY OF WEST LAFAYETTE ENGINEER. ANY PLAN MODIFICATIONS REQUIRE THE APPROVAL OF THE CITY OF WEST LAFAYETTE ENGINEER.
8	AT TIME OF IMPLEMENTATION, THIS MAINTENANCE OF TRAFFIC PLAN SHALL BE COORDINATED WITH THE CITY OF WEST LAFAYETTE ENGINEER.

MARK	DATE	DESCRIPTION

PROJECT NO:	13080
FILE:	13080-MOT.DWG
DRAWN BY:	JRF
CHECKED BY:	TRB

LOCATION:

A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:

MAINTENANCE OF TRAFFIC PLAN

C101

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\FINAL PLANS\PLOT\13080-MOT.dwg - USER: JUSTIN FRAZIER - DATE: Tuesday, April 29, 2014 12:57:43 PM

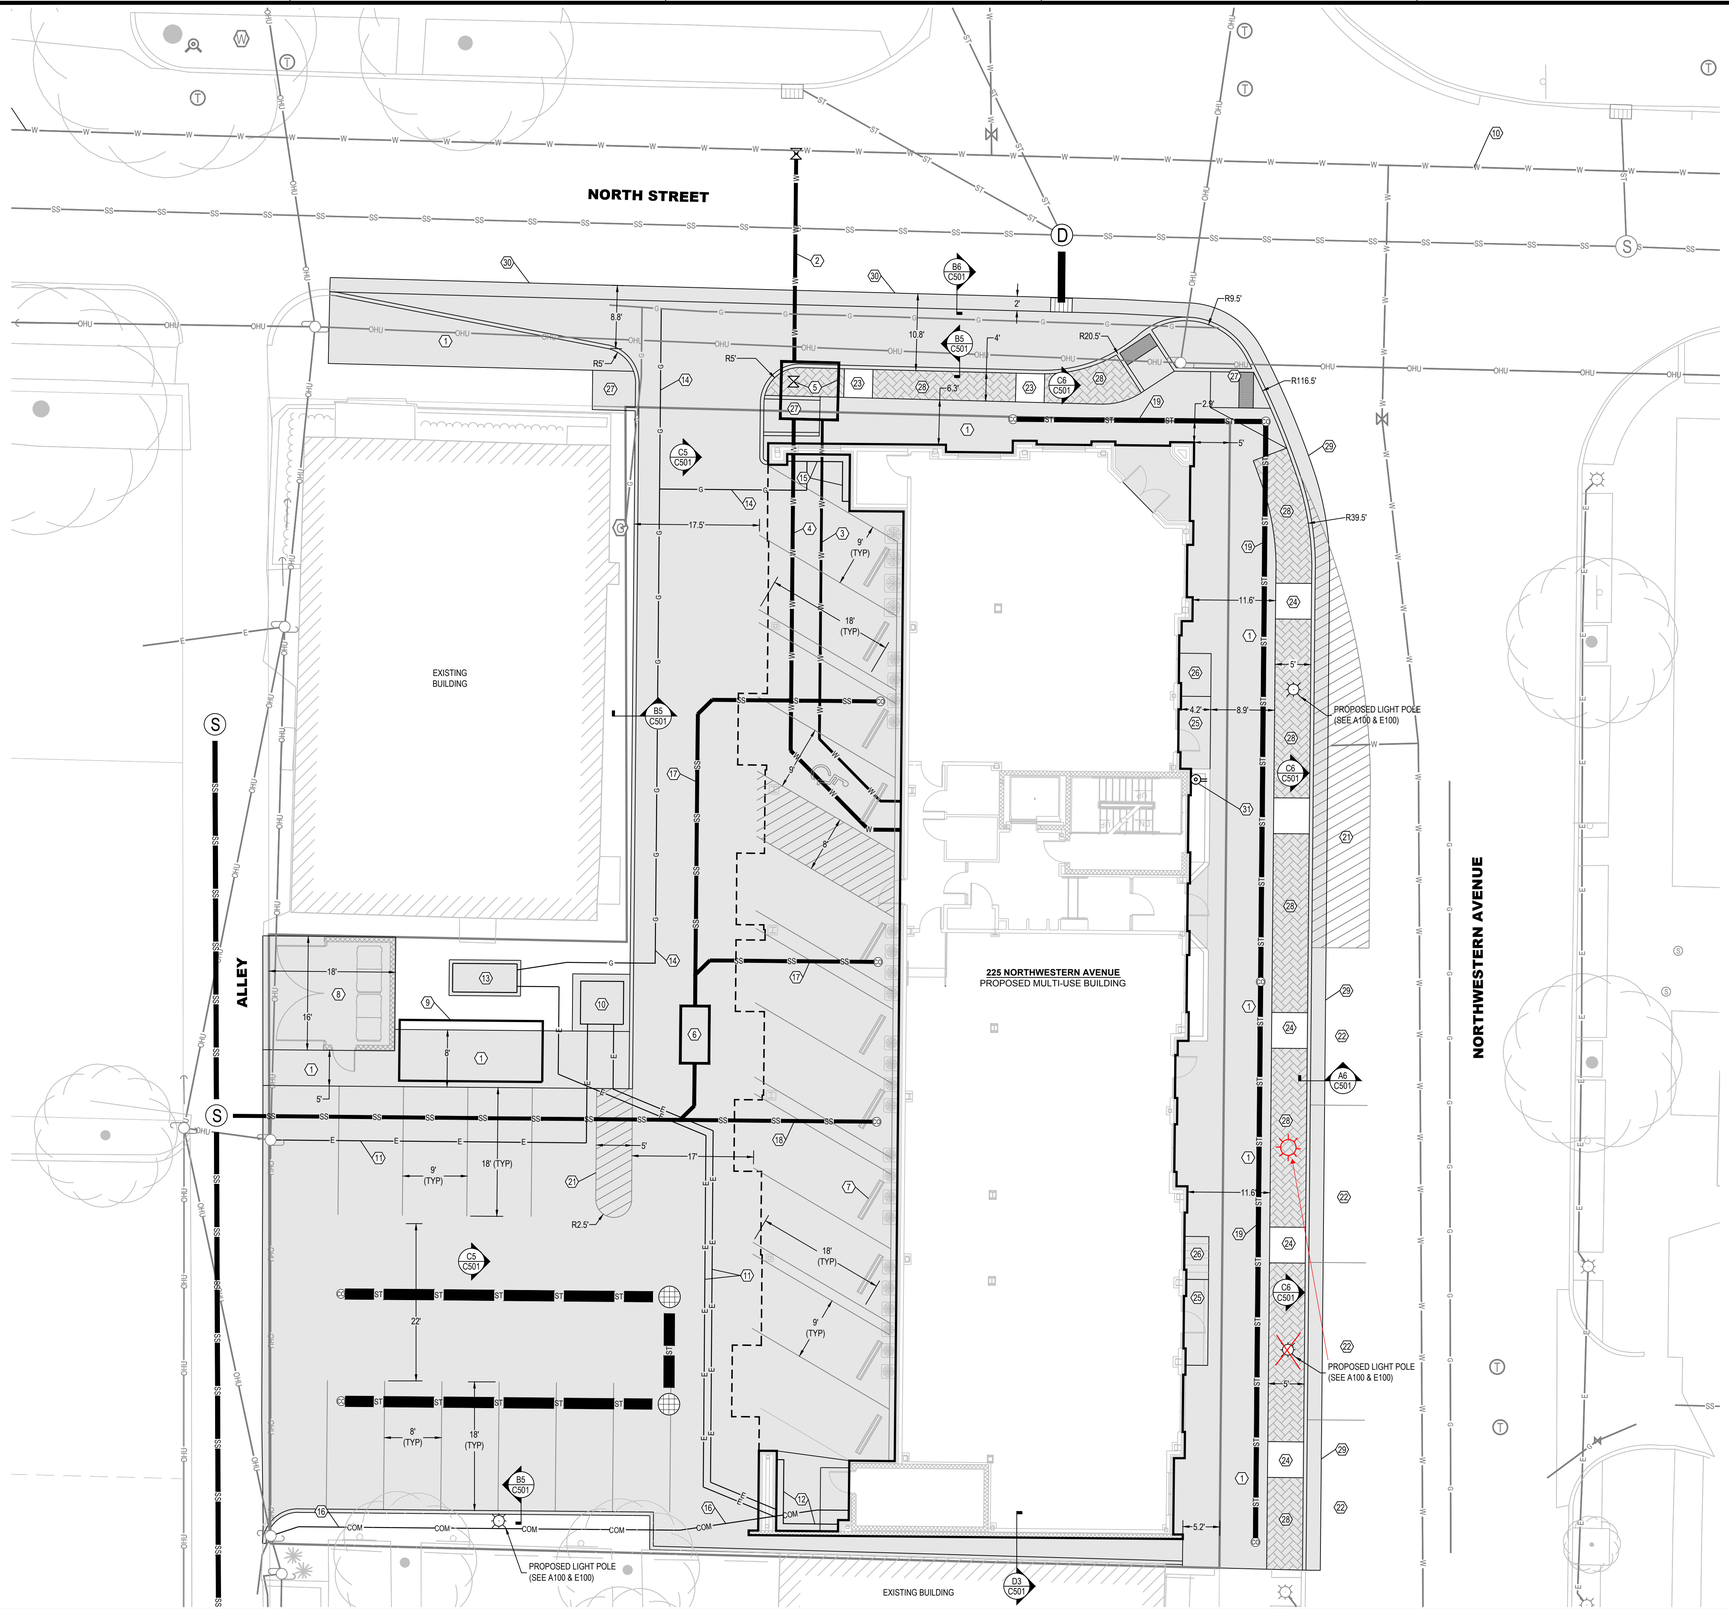

N

0' 10' 20'

HORIZONTAL SCALE: 1" = 10'

UTILITY APPROVAL

AUTHORITY	CONTACT
ELECTRIC DUKE ENERGY	SIGNATURE: Steven R Thompson PRINTED NAME: Steven R. Thompson DATE: 4/17/14
GAS VECTREN	SIGNATURE: PRINTED NAME: Deron Leslie DATE: 4/18/14
TELEPHONE ~~VERIZON~~ FRONTIER	SIGNATURE: Edward A. Foster PRINTED NAME: EDWARD A. FOSTER DATE: April 17/2014
CABLE COMCAST	SIGNATURE: PRINTED NAME: Jerry Shatters DATE: 4/18/14

KEYNOTES

1	CONCRETE SIDEWALK
2	6" WATER SERVICE MAIN. COORDINATE INSTALLATION AND CONNECTION WITH INDIANA AMERICAN WATER
3	4" DOMESTIC WATER SERVICE
4	6" FIRE PROTECTION LINE
5	WATER AND FIRE PROTECTION VAULT INCLUDING POST INDICATOR VALVE.
6	GREASE TRAP
7	CONCRETE WHEEL STOP (TYP)
8	TRASH ENCLOSURE
9	9' X 24' BIKE SHELTER
10	8'X8' TRANSFORMER PAD
11	4" PVC CONDUIT (ELECTRIC)
12	ELECTRIC METER BANK
13	GENERATOR PAD
14	4" PVC CONDUIT (GAS)
15	GAS METER BANK
16	TWO (2) 4" PVC CONDUITS (PHONE & CATV)
17	GREASE LINE
18	SANITARY LATERAL (SEE SANITARY SEWER PLANS)
19	DOWNSPOUT DRAINAGE COLLECTION PIPE (SEE STORM SEWER PLANS)
20	REPLACE EXISTING STORM CASTING (SEE STORM SEWER PLANS)
21	PAINTED GORE
22	PARALLEL PARKING SPACE
23	4'X4' TREE WELL GRATE
24	5'X5' TREE WELL GRATE
25	ENTRANCE LANDING
26	LANDING RAMP (AS REQUIRED)
27	CURB RAMP
28	BRICK PAVERS
29	30" CONCRETE CURB AND GUTTER
30	24" CONCRETE GUTTER
31	WALL MOUNT FIRE DEPARTMENT CONNECTION (30" PATTERN, 5" STORZ ONLET)

Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • Lafayette, Indiana
phone: (765) 742-1800 • fax: (765) 742-1905
www.bandsdesign.com

CERTIFIED BY:

JUSTIN R. FRAZIER REGISTERED NO. 10606088 STATE OF INDIANA PROFESSIONAL ENGINEER

04/29/14

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION
3	4/18/14	DRAINAGE REVISIONS
2	4/7/14	SITE REVISION

PROJECT NO:	13080
FILE:	13080-SITE.DWG
DRAWN BY:	JRF
CHECKED BY:	TRB

LOCATION:

A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:

SITE & UTILITY PLAN

C102

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\FINAL PLANS\PLOT\13080-SITE.dwg - USER: JUSTIN FRAZIER - DATE: Tuesday, April 29, 2014 12:26:16 PM

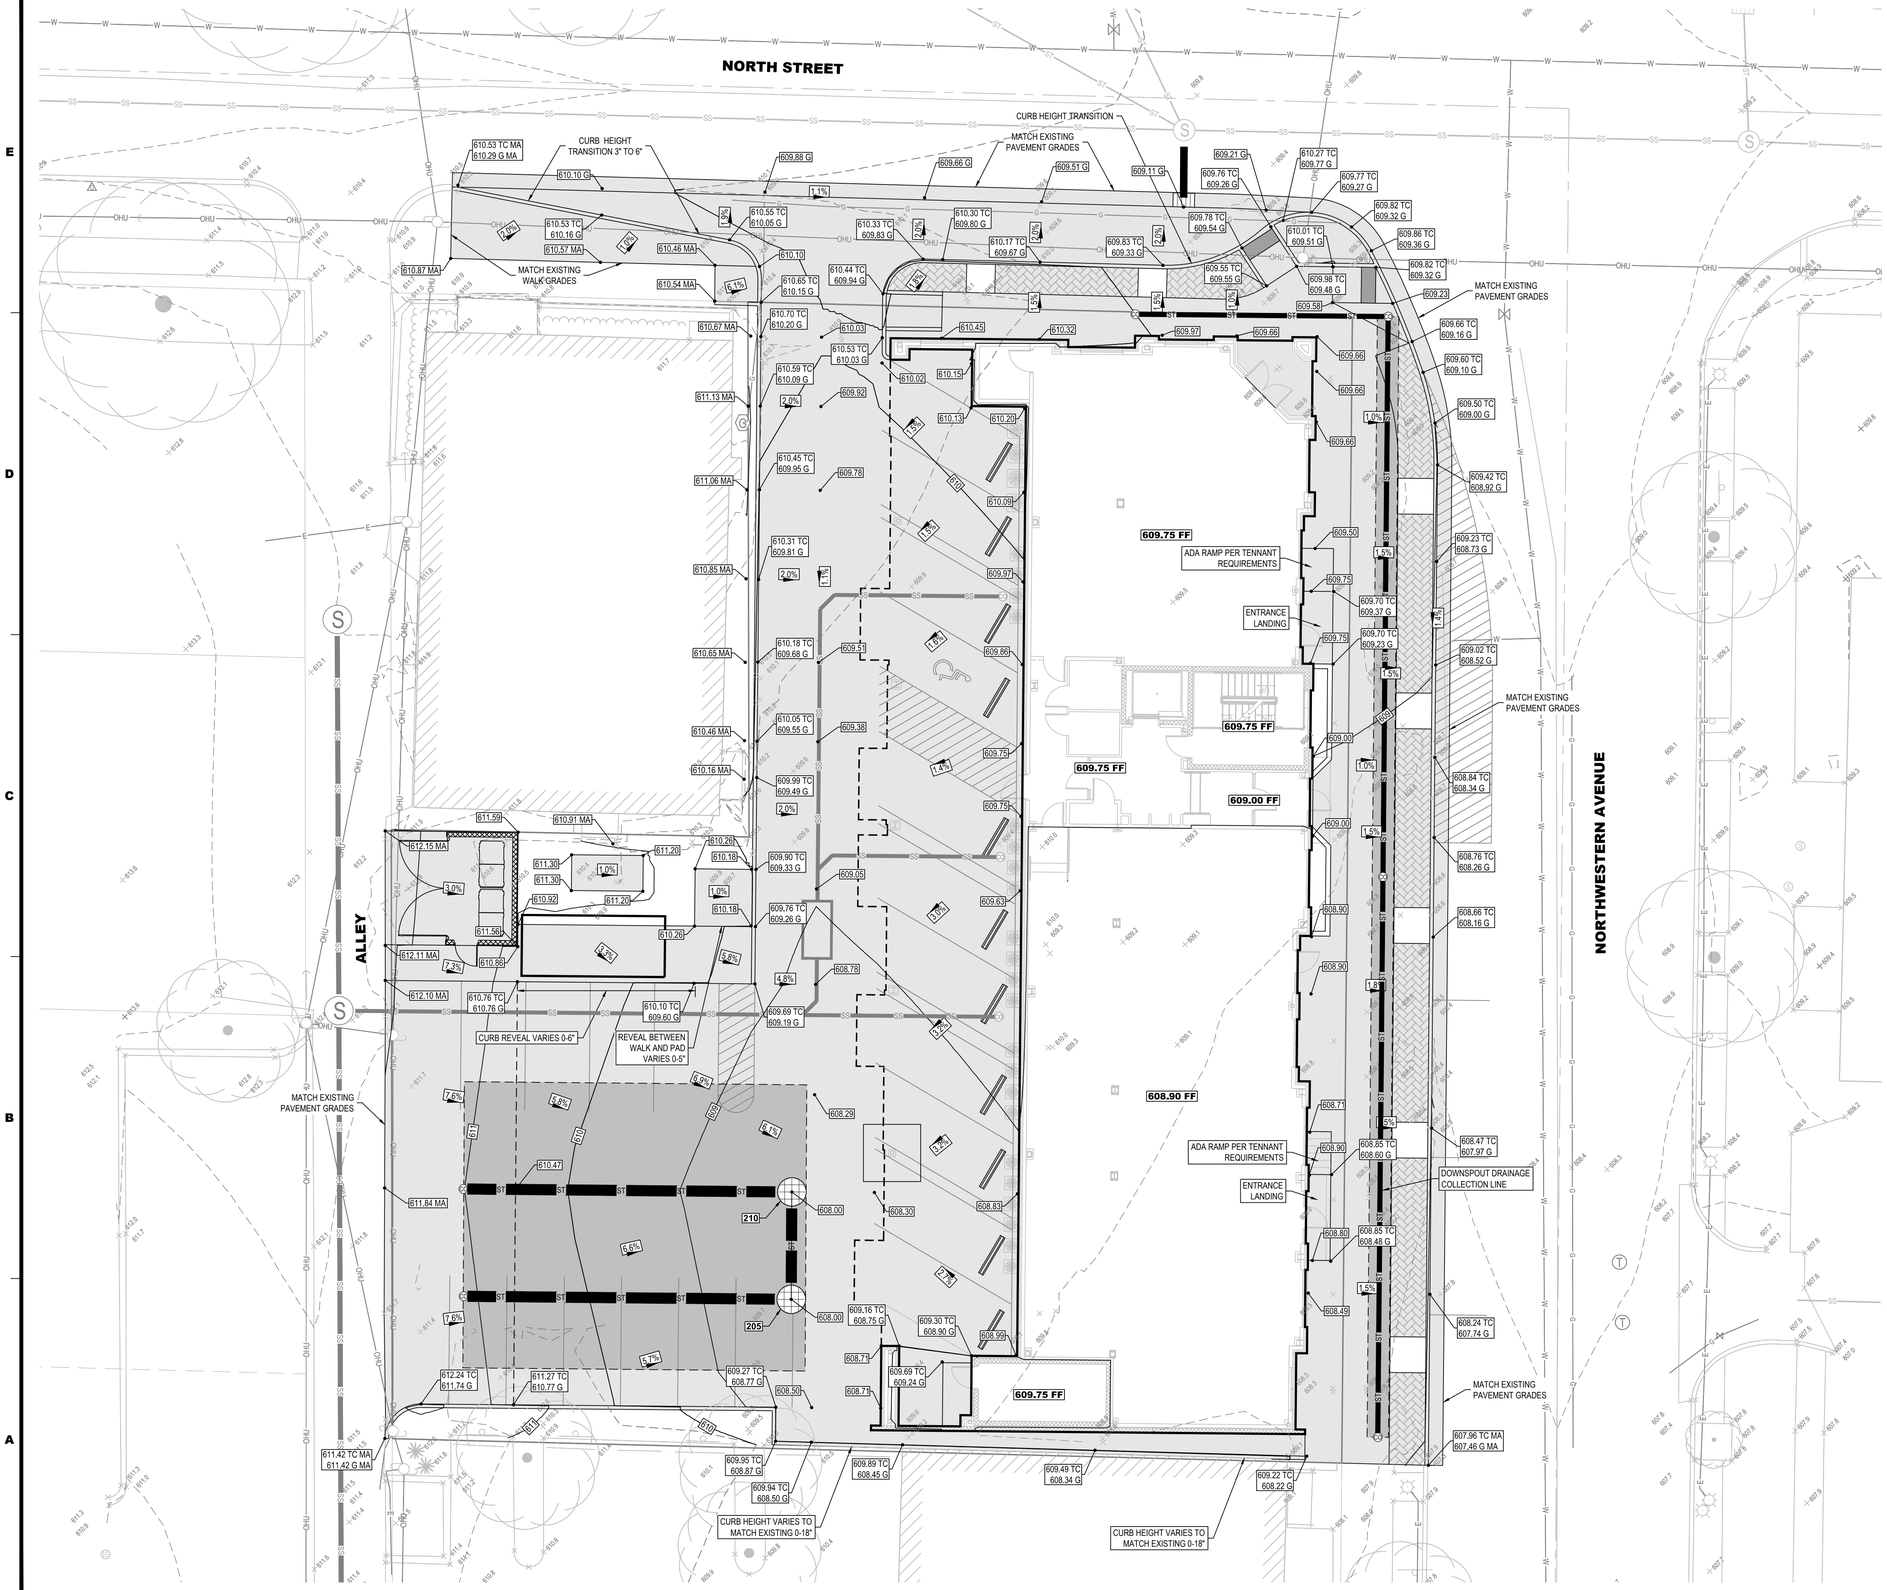

TBIRD
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • Lafayette, Indiana
phone: (765) 742-1800 • fax: (765) 742-1805
www.tbirddesign.com

CERTIFIED BY:

JUSTIN R. FRAZIER
REGISTERED
NO. 10606088
STATE OF INDIANA
PROFESSIONAL ENGINEER

04/29/14

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION
3	4/18/14	UPDATE PLAN VIEW
1	4/7/14	SITE REVISIONS

PROJECT NO:	13080
FILE:	13080-GRADE.DWG
DRAWN BY:	JRF
CHECKED BY:	TRB

LOCATION:

A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

N

0' 10' 20'

HORIZONTAL SCALE: 1" = 10'

TITLE:

GRADING & DRAINAGE PLAN

C103

NOTES

1	FINAL GRADING OF THE SITE SHALL CONFORM TO THIS PLAN
2	TOPOGRAPHY SHOWN HEREON IS BASED ON THE SURVEY PROVIDED BY TBIRD DESIGN SERVICES CORPORATION, DATED DECEMBER 19, 2004.

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\FINAL PLANS\PLOT\13080-GRADE.dwg - USER: JUSTIN FRAZIER - DATE: Tuesday, April 29, 2014 12:58:40 PM

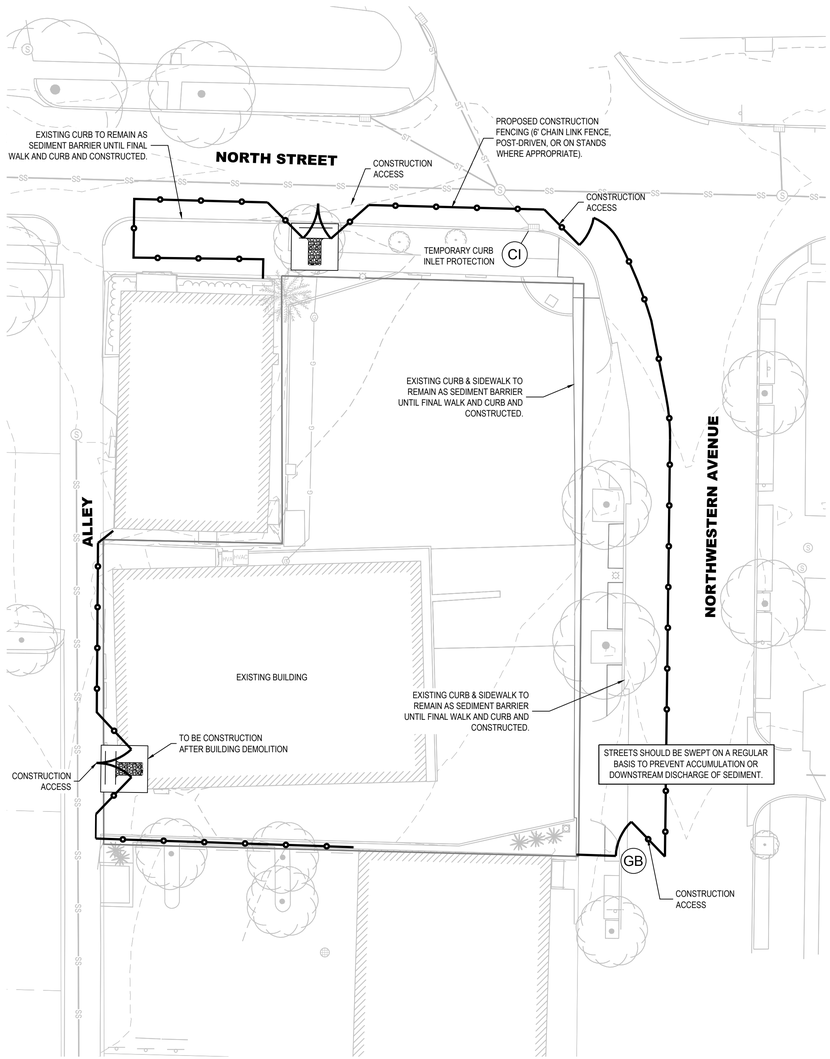

STORMWATER POLLUTION PREVENTION
DEMOLITION PHASE

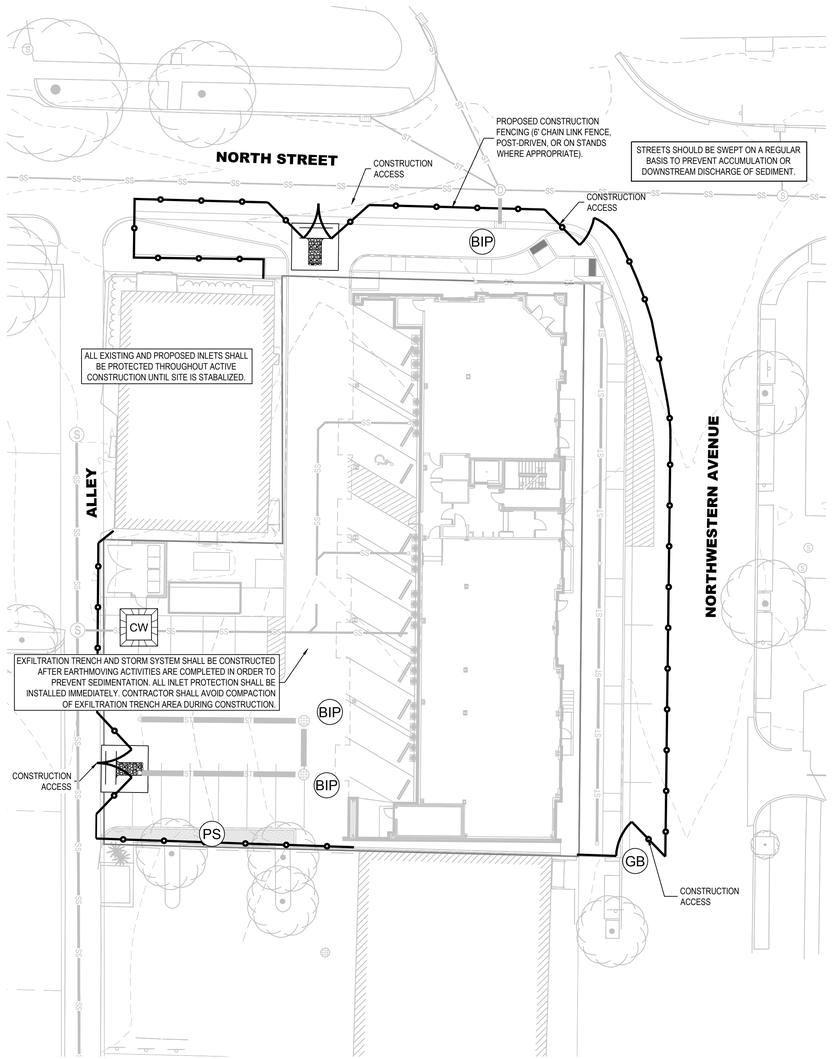

STORMWATER POLLUTION PREVENTION
CONSTRUCTION PHASE

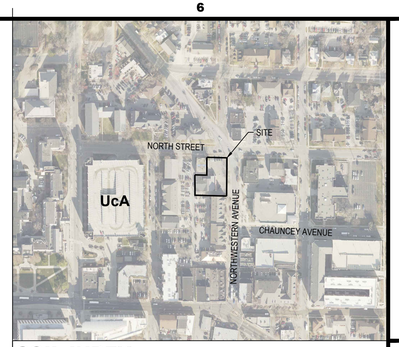

SOIL INDEX

ID	DESCRIPTION	HYDROLOGIC SOIL GROUP
UcA	URBAN LAND-CARMI COMPLEX, 0 TO 2 PERCENT SLOPES	B

SOIL LIMITATIONS

ID	SHALLOW EXCAVATIONS	SMALL COMMERCIAL BUILDINGS	LOCAL ROADS AND STREETS
UcA	SEVERE: CUTBANKS CAVE	SLIGHT	MODERATE: FROST ACTION



HORIZONTAL SCALE: 1" = 20'

LEGEND

BASKET INLET PROTECTION	BIP
TEMPORARY CURB INLET PROTECTION	CI
GRAVEL FILTER BAG	GB
AREA OF PERMANENT SEEDING	PS
CONCRETE WASHOUT	CW
CONSTRUCTION ENTRANCE	

SWPP NOTES

1	THE STORMWATER NOTICE OF INTENT (NOI) AND REQUIRED INFORMATION FOR THIS PROJECT MUST BE POSTED AS NOTED THROUGHOUT THE DURATION OF CONSTRUCTION ACTIVITIES UNTIL A NOTICE OF TERMINATION (NOT) HAS BEEN FILED.
2	A SELF-MONITORING PROGRAM MUST BE IMPLEMENTED BY THE PROJECT SITE OWNER TO INSURE THE STORMWATER POLLUTION PREVENTION PLAN IS WORKING EFFECTIVELY. AN INSPECTOR SHALL PERFORM A WRITTEN EVALUATION OF THE PROJECT SITE BY THE END OF THE NEXT BUSINESS DAY FOLLOWING EACH MEASURABLE STORM EVENT. IF THERE ARE NO MEASURABLE STORM EVENTS WITHIN A GIVEN WEEK, THE SITE SHOULD BE MONITORED AT LEAST ONCE IN THAT WEEK. WEEKLY INSPECTIONS SHALL CONTINUE UNTIL THE ENTIRE SITE HAS BEEN STABILIZED AND A NOTICE OF TERMINATION HAS BEEN ISSUED. THE INSPECTOR SHOULD LOOK AT THE MAINTENANCE OF EXISTING STORMWATER POLLUTION PREVENTION MEASURES, INCLUDING EROSION AND SEDIMENT CONTROL MEASURES, DRAINAGE STRUCTURES, AND CONSTRUCTION MATERIALS STORAGE/CONTAINMENT FACILITIES, TO ENSURE THEY ARE FUNCTIONING PROPERLY. THE INSPECTOR SHOULD ALSO IDENTIFY ADDITIONAL MEASURES, BEYOND THOSE ORIGINALLY IDENTIFIED IN THE STORMWATER POLLUTION PREVENTION PLAN, NECESSARY TO REMAIN IN COMPLIANCE WITH ALL APPLICABLE STATUTES AND REGULATIONS. ALTHOUGH SELF-MONITORING REPORTS DO NOT NEED TO BE SUBMITTED , WEST LAFAYETTE HAS THE RIGHT TO REQUEST COMPLETE RECORDS OF MAINTENANCE AND MONITORING ACTIVITIES INVOLVING STORMWATER POLLUTION PREVENTION MEASURES. ALL EVALUATION REPORTS FOR THE PROJECT SITE MUST BE MADE AVAILABLE TO WEST LAFAYETTE, IN AN ORGANIZED FASHION, WITHIN FORTY-EIGHT (48) HOURS OF A REQUEST.
3	ALL CONSTRUCTION ACTIVITY ALONG WITH ANY EROSION CONTROL AND STORM WATER QUALITY MEASURES INSTALLED SHALL BE AS DETAILED AND SPECIFIED IN THE CURRENT INDIANA STORM WATER QUALITY MANUAL. THE INDIANA STORM WATER QUALITY MANUAL, PUBLISHED BY THE INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT, IS HEREBY INDCORPORATED INTO THE PROJECT DOCUMENTS BY REFERENCE.
4	PERMANENT SEEDING IS REQUIRED ON ALL TOPSOIL AREAS WITHIN THE CONSTRUCTION LIMITS.

Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • Lafayette, Indiana
phone: (765) 742-1800 • fax: (765) 742-1905
www.bandsdesign.com

CERTIFIED BY:

JUSTIN R. FRAZIER
REGISTERED
NO. 10606088
STATE OF INDIANA
PROFESSIONAL ENGINEER

04/29/14

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION
3	4/18/14	UPDATE PLAN VIEW
1	4/7/14	SITE REVISIONS

PROJECT NO: **13080**
FILE: 13080-GRADE SWPPP.DWG
DRAWN BY: JRF
CHECKED BY: TRB

LOCATION:

A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:
STORMWATER POLLUTION PREVENTION PLAN

C104

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\FINAL PLANS\PLOT\13080-GRADE SWPPP.dwg - USER: DAVID PERRINE - DATE: Tuesday, April 29, 2014 1:59:59 PM

STORMWATER POLLUTION PREVENTION SPECIFICATIONS

As required by Title 327, Article 15, Rule 5, Section 7 (b) (6) of the Indiana Administrative Code:
The project site owner/manager shall post a notice near the main entrance of the project site. For linear project sites, such as a pipeline or highway, the notice must be placed in a publicly accessible location near the project field office. The notice must be maintained in a legible condition and contain the following information:

- A copy of the completed Notice of Intent (NOI) letter and NPDES permit number, where applicable.
- Name, company name, telephone number, e-mail address and address of the site owner or local contact person.
- The location of the construction documents if the site does not have an on-site location to store the plan.

The NOI and required information for this project must be posted as noted throughout the duration of construction activities until a Notice of Termination (NOT) has been filed with the Office of the City Engineer.

All construction activity along with any erosion control and storm water quality measures installed shall be as detailed and specified in the current Indiana Storm Water Quality Manual. The Indiana Storm Water Quality Manual, published by the Indiana Department of Environmental Management, is hereby incorporated into the project documents by reference.

PERSON(S) RESPONSIBLE FOR EROSION & SEDIMENT CONTROL:
Land Quest, LLC
PO Box 308
Lafayette, IN 47902

In order to satisfy the requirements outlined in Title 327, Article 15, Rule 5 of Indiana Administrative Code, the project documents, including the following narrative, specifications and construction plans are hereby presented. The original language of 327 IAC 15-5-6.5 (a) is presented herein in faded style, along with ***comments by the engineer in italics*** as necessary.

1. Project narrative and supporting documents, including the following information:
   a. An index indicating the location, in the construction plans, of all information required by this subsection.
      Plan index provided.
   b. Description of the nature and purpose of the project.
      The subject project is a mixed use residential and commercial/retail space. The building shall be five (5) stories in height. The site and construction area is approximately 0.4 acres.
   c. Legal description of the project site. The description should be to the nearest quarter section, township and range, and include the civil township.
      Part of the Northeast Quarter of Section 19, Township 23 North, Range 4 West, City of West Lafayette, Wabash Township, Tippecanoe County, Indiana. Longitude: 86°54'29.99"W Latitude: 40°25'31.37"N
   d. Soil properties, characteristics, limitations and hazards associated with the project site and the measures that will be integrated into the project to overcome or minimize adverse soil conditions.
      Provided in the construction plans.
   e. General construction sequence of how the project site will be built, including phases of construction.
      Construction Phasing: Preconstruction & Construction Activities (Demolition & New Construction). See Item 7e for detailed sequencing.
   f. Hydrologic Unit code (14 Digit) available from the United States Geological Survey (USGS).
      05120108010040
   g. A reduced plat or project site map showing the lot numbers, lot boundaries and road layout and names. The reduced map must be legible and submitted on a sheet or sheets no larger than eleven (11) inches by seventeen (17) inches for all phases or sections of the project site.
      Provided in the construction plans by plotting the plans at 50% scale.
   h. Identification of any other state or federal water quality permits that are required for construction activities associated with the owner's projected site.
      None required.
2. Vicinity map depicting the project site location in relationship to recognizable local landmarks, towns and major roads, such as a USGS topographic quadrangle map or county or municipal road map.
   Provided in the construction plans.
3. An existing project site layout that must include the following information:
   a. Location and name of all wetlands, lakes and water courses on or adjacent to the project site.
      None known to exist.
   b. Location of all existing structures on the project site.
      See Sheet V101, Topographic Survey.
   c. One hundred (100) year floodplains, floodway fringes and floodways. Please note if none exists.
      None known to exist.
   d. Soil map of the predominant soil types, as determined by the United States Department of Agriculture (USDA), Natural Resources Conservation Service (NRCS) Soil Survey, or an equivalent publication, or as determined by a soil scientist. A soil legend must be included with the soil map.
      Provided in the construction plans.
   e. Identification and delineation of vegetative cover, such as grass, weeds, brush and trees on the project site.
      The existing site is primarily impervious cover including an existing building and associated parking lot.
   f. Land use of all adjacent properties.
      West Lafayette fire station to the north, warehouse building to the west, West Lafayette Public Library to the east, and a three story mixed use to the south.
   g. Existing topography at a contour interval appropriate to indicate drainage patterns.
      Provided in the construction plans.
4. Final project site layout, including the following information:
   a. Location of all proposed site improvements, including roads, utilities, lot delineation and identification, proposed structures and common areas.
      Provided in the construction plans.
   b. One hundred (100) year floodplains, floodway fringes and floodways. Please note if none exist.
      None known to exist.
   c. Proposed final topography at a contour interval appropriate to indicate drainage patterns.
      Provided in the construction plans.
5. A grading plan, including the following information:
   a. Delineation of all proposed land disturbing activities, including off-site activities that will provide services to the project site.
      Provided in the construction plans.
   b. Location of all soil stockpiles and borrow areas.
      Provided in the construction plans.
   c. Information regarding any off-site borrow, stockpile or disposal areas that are associated with a project site and under the control of the project site owner.
      None proposed.
   d. Existing and proposed topographic information.
      Provided in the construction plans.
6. A drainage plan, including the following information:
   a. An estimate of the peak discharge, based on the ten (10) year storm event, of the project site for both preconstruction and post construction conditions.
      Provided in the construction plans.
   b. Location, size and dimensions of all storm water drainage systems, such as culverts, storm sewers and conveyance channels.
      Provided in the construction plans.
   c. Locations where storm water may be directly discharge into ground water such as abandoned wells or sinkholes. Please not if none exists.
      None known to exist. Proposed exfiltration trenches shown in the construction plans.
   d. Locations of specific points where storm water discharge will leave the project site.
      Provided in the construction plans.
   e. Name of all receiving waters. If the discharge is to a separate municipal storm sewer, identify the name of the municipal operator and the ultimate receiving water.
      Discharge is to a proposed exfiltration trench.
   f. Location, size and dimensions of features, such as permanent retention or detention facilities, including existing or manmade wetlands, used for the purpose of storm water management.
      Permanent exfiltration trenches are designed to collect and release into the ground for frequent event storms.
7. A storm water pollution prevention plan associated with construction activities. The plan must be designed to, at least, meet the requirements of sections 7 and 7.5 of this rule and must include the following:
   All construction activity along with any erosion control and storm water quality measures installed shall be as detailed and specified in the current Indiana Storm Water Quality Manual.
   a. Location, dimensions, detailed specifications and construction details of all temporary and permanent storm water quality measures.
      Provided in the construction plans are locations of any planned erosion control and storm water quality measures. Any site specific details and specifications for erosion control and storm water quality measures are also provided in the construction plans. Erosion control and storm water quality measures that are not specifically detailed in the construction plans, shall be in conformance with the dimensions, detailed specifications, and construction details outlined in the Indiana Storm Water Quality manual.
   b. Temporary stabilization plans and sequence of implementation.
      Do not leave disturbed areas unprotected for more than 14 days. Rule 5 requires that all disturbed areas that potentially will be idle for 14 days will be stabilized (seeded, mulched, etc.) immediately. The duration of time which an area remains exposed shall be kept to a practical minimum depending on weather. Areas of the site which are to be paved alternatively may be temporarily stabilized by applying sub-base until pavement can be applied.
   c. Permanent stabilization plans and sequence of implementation.
      Disturbed portions of the site where construction activity has permanently ceased shall be stabilized with permanent seeding within 14 days of the last construction activity.
   d. Temporary and permanent stabilization plans shall include the following:
      i. Specifications and application rates for soil amendments and seed mixtures.
         For additional information and specifications for temporary and permanent stabilization, see Chapter 7 of the Indiana Erosion Control Handbook.

Seed Species	Rate per Acre (lbs)	Planting Depth (inches)	Optimum Dates
Wheat or Rye	150	1 - 1½	Sept. 15 - Oct. 30
Spring Oats	100	1	March 1 - April 15
Annual Ryegrass	40	¼	March 1 - May 1 Aug. 1 - Sept. 1
German Millet	40	1 - 2	May 1 - June 1
Sundangrass	35	1 - 2	May 1 - July 30
Buckwheat	60	1 - 2	April 15 - June 1
Corn (broadcast)	300	1 - 2	May 11 - Aug. 10
Sorghum	3	1 - 2	May 1 - July 15

Table 1: Temporary Seeding Specifications

Seed Mixtures	Rate per Acre Pure Live Seed (lbs)	Optimum Soil pH
1. Perennial ryegrass - white clover	70 2	5.6 to 7.0
2. Perennial ryegrass - tall fescue	70 50	5.6 to 7.0
3. Tall Fescue - white clover	70 2	5.5 to 7.5

Table 2a: Permanent Seeding Recommendations- Open low-maintenance areas (remaining idle more than six months)

Seed Mixtures	Rate per Acre Pure Live Seed (lbs)	Optimum Soil pH
1. Smooth, brome grass - red clover	35 20	5.5 to 7.0
2. Tall Fescue - white clover	50 2	5.5 to 7.5
3. Tall Fescue - red clover	50 20	5.5 to 7.5
4. Orchard Grass - red clover - white clover	30 20 2	5.6 to 7.0

Table 2b: Permanent Seeding Recommendations- Steep banks and cuts, low-maintenance areas (not mowed)

Seed Mixtures	Rate per Acre Pure Live Seed (lbs)	Optimum Soil pH
1. Bluegrass	140	5.5 to 7.0
2. Perennial ryegrass (turf type)	60 90	5.6 to 7.0
3. Tall Fescue (turf type) - bluegrass	170 30	5.6 to 7.5

Table 2c: Permanent Seeding Recommendations- Lawns and high-maintenance areas

Seed Mixtures	Rate per Acre Pure Live Seed (lbs)	Optimum Soil pH
1. Perennial ryegrass - white	150 2	5.5 to 7.0
2. Kentucky bluegrass - smooth brome grass - switch grass - timothy - perennial ryegrass - white clover	20 10 3 4 10 2	5.5 to 7.5
3. Tall Fescue - white clover	150 2	5.6 to 7.5
4. Tall Fescue - perennial ryegrass - Kentucky bluegrass	150 20 20	5.5 to 7.5

Table 2d: Permanent Seeding Recommendations- Channels and areas of concentrated flow

   ii. The type and application rate for anchored mulch.
      For additional information and specifications for mulching, see pages 55-57 of Chapter 7 of the Indiana Erosion Control Handbook.

Material	Rate per Acre (tons)	Comments
Straw or hay	2	Should be dry, free of undesirable seeds. Spread by hand or machine. Must be crimped or anchored
Wood fiber or cellulose	1	Apply with a hydraulic mulch machine and use with tacking agent

Anchoring Method	How to Apply
Mulch anchoring tool or farm disk (dull, serrated and blades set straight)	Crimp or punch the straw or hay two to four inches into the soil. Operate machinery on the contour of the slope.
Cleating with dozer tracks	Operate dozer up and down slope to prevent formation of rills by dozer cleats.
Wood hydro mulch fibers	Apply according to manufacturer's recommendations
Synthetic tackifiers, binders or soil stabilizers	Apply according to manufacturer's recommendations
Netting (synthetic or biodegradable material)	Install netting immediately after applying mulch. Anchor netting with staples. Edges of netting strips should overlap with each up-slope strip overlapping four to six inches over the adjacent down-slope strip. Best suited to slope applications. In most instances, installation details are site specific, so manufacturer's recommendations should be followed.

   e. Construction sequence describing the relationship between implementation of storm water quality measures and stages of construction activities.
      i. ***PRECONSTRUCTION ACTIVITIES:***
         1. ***Call the Indiana Underground Plant Protections systems, Inc. ("Holey Moley") at phone number "811" to check the location of any existing utilities. They should be notified two working days before construction takes place.***
         2. ***Establish onsite location for owner/operator/contractor placement of approved plans and Rule 5 NNOI and Rule 5 inspection documentation.***
         3. ***Install construction fence as shown on plans.***
         4. ***Prepare stabilized construction entrance.***
         5. ***Install temporary inlet protection measures for existing storm inlets.***
         6. ***Establish construction staging area for equipment and vehicles as far from water bodies and swales as possible.***
      ii. ***CONSTRUCTION ACTIVITIES:***
         1. ***Once erosion and sediment control measures are in place, begin site demolition (leave existing curbs as sediment barriers per plans) and land clearing followed by rough grading. Do not leave large areas unprotected for more than 14 days. Rule 5 requires that all disturbed areas that potentially will be idle for 14 days of more will be stabilized (seeded, mulched, etc.) immediately.***
         2. ***Apply permanent seeding to all slopes and areas that will not be disturbed further.***
         3. ***If necessary, begin dewatering operations. Ensure that in applicable areas dewatering operations are discharged per SWPPP specifications.***
         4. ***Complete mass excavation.***
         5. ***Construct building.***
         6. ***Saw cut streets as shown on the plans and remove existing pavement and curbs inside project limits.***
         7. ***Begin excavation for pipe installation. Upon completion of pipe installation, re-grade and seed as the project progresses.***
         8. ***All restoration of excavated topsoil must be completed in a reasonable amount of time. A reasonable amount of time shall be considered 7 days of the end of pipe section installation.***
         9. ***Basket inlet protection, riprap protection, and block and gravel inlet protection shall be installed immediately following the construction of the storm water conveyance sewer.***
         10. ***Final grade surface.***
         11. ***Clean up site and seed all areas that will not be disturbed by the pavement and building construction.***
         12. ***Finish building construction and facade work.***
         13. ***Install final pavement and sidewalks.***
         14. ***Install landscaping.***
         15. ***Remove temporary erosion control devices as soon as surface treatments are well established, then grade and stabilize any disturbed areas.***
   f. Self-monitoring program including plan and procedures.
      A Construction Site Inspection and Maintenance Log has been included to assist in the self monitoring progrmm. In accordance with 327 IAC 15-5-7(18), a self monitoring program that includes the following must be implemented:
      i. ***A trained individual shall perform a written evaluation of the project site:***
         1. ***by the end of the next business day following each measurable storm event***
         2. ***at a minimum of one (1) time per week.***
      ii. ***The evaluation must:***
         1. ***address the maintenance of existing storm water quality measures to ensure they are functioning properly; and***
         2. ***identify additional measures necessary to remain in compliance with all applicable statutes and rules.***
      iii. ***Written evaluation reports must include:***
         1. ***the name of the individual performing the evaluation***
         2. ***the date of the evaluation***
         3. ***the problems identified at the project site***
         4. ***details of corrective actions recommended and completed.***
      iv. ***All evaluation reports for the project site must be made available to the inspecting authority within forty-eight (48) hours.***
   g. A description of potential pollutant sources associated with the construction activities that may reasonably be expected to add a significant amount of pollutants to storm water discharges. The following items are expected to be present on the project site as a result of construction activity:
      - ***Asphalt***
      - ***Concrete***
      - ***Fertilizers***
      - ***Metal pieces***
      - ***Petroleum based products***
      - ***Tar***
      - ***Cleaning supplies***
      - ***Detergents***
      - ***Masonry block/bricks***
      - ***Paint***
      - ***Roofing supplies***
      - ***Wood***
   h. Material handling and storage associated with construction activity shall meet the spill prevention and spill response requirements in 327 IAC 2-6.1.
      i. ***SPILL PREVENTION AND CONTROL***
         The following are the material management practices that will be used to reduce the risk of spills or other accidental exposure of materials and substances to storm water runoff.
         1. ***Good Housekeeping***
            a. ***Superintendent shall inspect project area daily for proper storage, use and disposal of construction materials***
            b. ***Store only enough material on site for project completion***
            c. ***All substances should be used entirely before disposal of container***
            d. ***All construction materials stored shall be organized in the proper contained and if possible, stored under a roof or protective cover.***
            e. ***Products shall not be mixed unless directed by the manufacturer.***
            f. ***All products shall be used and disposed of according to the manufacturer's recommendations.***
         2. ***Hazardous Products***
            a. ***Environmental emergency contact – Tippecanoe Emergency Response: 765-742-1334***
            b. ***Materials should be kept in original container with labels unless the original containers cannot be resealed. If original containers cannot be used, labels and product information shall be saved.***
            c. ***Proper disposal practices shall always be followed in accordance with manufacturer and local/state regulations.***
         3. ***Product Specific Practices***
            a. ***Petroleum products must be stored in proper containers and clearly labeled. Vehicles containing petroleum products shall be periodically inspected for leaks. Precautions shall be taken to avoid leakage of petroleum products on site.***
            b. ***The minimum amount of fertilizer shall be used and mixed into the soil in order to limit exposure to storm water. Fertilizers shall be stored in a covered shed. The contents of any partially used bags of fertilizer shall be transferred to a sealable plastic bin to avoid spills.***
            c. ***Paint containers shall be sealed and stored when not in use. Excess paint must be disposed of in an approved manner.***
            d. ***Concrete trucks shall not be allowed to wash out or discharge surplus concrete or drum wash water on the site except in area as designated on plans and constructed by contractor.***
      ii. ***SPILL CONTROL PRACTICES***
         In addition to the good housekeeping and material management practices discussed in the previous sections of this plan, the following practices shall be followed for spill prevention and cleanup.
         1. ***Spill cleanup information shall be posted on site to inform employees about cleanup procedures and resources.***
         2. ***The following clean-up equipment must be kept on-site near the material storage area: gloves, mops, rags, brooms, dust pans, sand sawdust, liquid absorber, goggles and trash containers.***
         3. ***All spills shall be cleaned up as soon as possible***
         4. ***When cleaning a spill, the area should be well ventilated and the employee shall wear proper protective covering to prevent injury.***
         5. ***Toxic spills must be reported to the proper authority regardless of the size of the spill.***
         6. ***After a spill, the prevention plan shall be reviewed and changed to prevent further similar spills from occurring. The cause of the spill, measures to prevent it, and how to clean the spill up shall be recorded.***
         7. ***The superintendent shall be the spill prevention and cleanup coordinator and is responsible for the day to day site operations. The superintendent also oversees the spill prevention and cleanup procedures.***
         8. ***The superintendent shall organize the training for inspection procedures and proper erosion control methods for employees that complete inspections.***
8. The post construction storm water pollution prevention plan. The plan must include the following information:
   a. A description of potential pollutant sources from the proposed land use, which may reasonably be expected to add a significant amount of pollutants to storm water discharges.
      Silt and sediment from exposed soils, leaves, mulch and vehicular sources such as leaking fuel or oil, brake fluid, brake dust, grease, antifreeze, metals, rubber fragments, road grit, salts and sands, construction trash and debris, fertilizers, household items including but not limited to cleaning agents, chemicals, paint, miscellaneous home improvement materials, toys, clothing and animal waste, elevated storm runoff temperatures, acid rain pesticides and pathogens.
   b. Location, dimensions, detailed specifications and construction details of all post construction storm water quality measures.
      An exfiltration trench shall be installed on the site to accommodate storm water runoff. Sump and snout structures will prevent sediment and debris from entering the proposed exfiltration trenche.
   c. A description of measures that will be installed to control pollutants in storm water discharges that will occur after construction activities have been completed. Such practices include infiltration of run-off, flow reduction by use of open vegetated swales and natural depressions, buffer strip and riparian zone preservation, filter strip creation, minimization of land disturbance and surface imperviousness, maximization of open space and storm water retention and detention ponds.
      See above.
   d. A sequence describing when each post construction storm water quality measure will be installed.
      See above.
   e. Storm water quality measures that will remove of minimize pollutants from storm water run-off.
      See above.
   f. Storm water quality measures that will be implemented to prevent or minimize adverse impacts to stream and riparian habitat.
      See above.
   g. A narrative description of the maintenance guidelines for all post construction storm water quality measures to facilitate their proper long term function. This narrative description shall be made available to future parties who will assume responsibility for the operation and maintenance of the post construction storm water quality measures.
      See Stormwater O&M Manual for project.

CONSTRUCTION SITE INSPECTION & MAINTENANCE LOG

Date: _____
Project: _____
Inspected by: _____
Type of Inspection: ☐ Scheduled Weekly ☐ Rain Event

All Stormwater pollution prevention BMP's shall be inspected and maintained as needed to ensure continued performance of their intended function during construction and shall continue until the entire site has been stabilized and a Notice of Termination has been issued. An inspection for the project site must be completed by the end of the next business day following each measurable storm event. If there are no measurable storm events within a given week, the site should be monitored at lease once in that week. Maintenance and repair shall be conducted in accordance with the approved site plans. This log shall be kept as a permanent record and must be made available to the engineer of any jurisdictional entity in an organized fashion, within forty-eight (48) hours of a request.

Yes	No	N/A	
			1. Are all sediment control barriers, inlet protection and silt fences in place and functioning properly?
			2. Are all erodible slopes protected from erosion through the implementation of acceptable soil stabilization practices?
			3. Are all dewatering structures functioning properly?
			4. Are all discharge points free of any noticeable pollutant discharges?
			5. Are all discharge points free of any noticeable erosion or sediment transport?
			6. Are designated equipment washout areas properly sited, clearly marked, and being utilized?
			7. Are construction staging and parking areas restricted to areas designated as such on the plans?
			8. Are temporary soil stockpiles in approved areas and properly protected?
			9. Are construction entrances properly installed and being used and maintained?
			10. Are "Do Not Disturb" areas designated on plan sheets clearly marked on-site and avoided?
			11. Are public roads at intersections with site access roads being kept clear of sediment, debris, and mud?
			12. Is spill response equipment on-site, logically located, and easily accessed in an emergency?
			13. Are emergency response procedures and contact information clearly posted?
			14. Is solid waste properly contained?
			15. Is a stable access provided to the solid waste storage and pick-up area?
			16. Are hazardous materials, waste or otherwise, being properly handled and stored?
			17. Have previously recommended corrective actions been implemented?

If you answered "no" to any of the above questions, describe any corrective action which must be taken to remedy the problem and when the corrective actions are to be completed.

_____
_____
_____
_____
_____
_____

FEIRD
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 NORTH 10TH STREET • LAFAYETTE, INDIANA
phone: (765) 742-1800 • fax: (765) 742-1805
www.feirddesign.com

CERTIFIED BY:
JUSTIN R. FRAZIER
REGISTERED
NO. 10606088
STATE OF INDIANA
PROFESSIONAL ENGINEER
04/29/14

225 NORTHWESTERN AVENUE
PLANNED DEVELOPMENT
GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION
1	4/7/14	SITE REVISIONS

PROJECT NO: 13080
FILE: 13080-GRADE SWPPP.DWG
DRAWN BY: JRF
CHECKED BY: TRB
LOCATION:
A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:
STORMWATER POLLUTION PREVENTION SPECIFICATIONS

C105

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\FINAL PLANS\PLOT\13080-GRADE SWPPP.dwg - USER: JUSTIN FRAZIER - DATE: Tuesday, April 29, 2014 12:59:14 PM

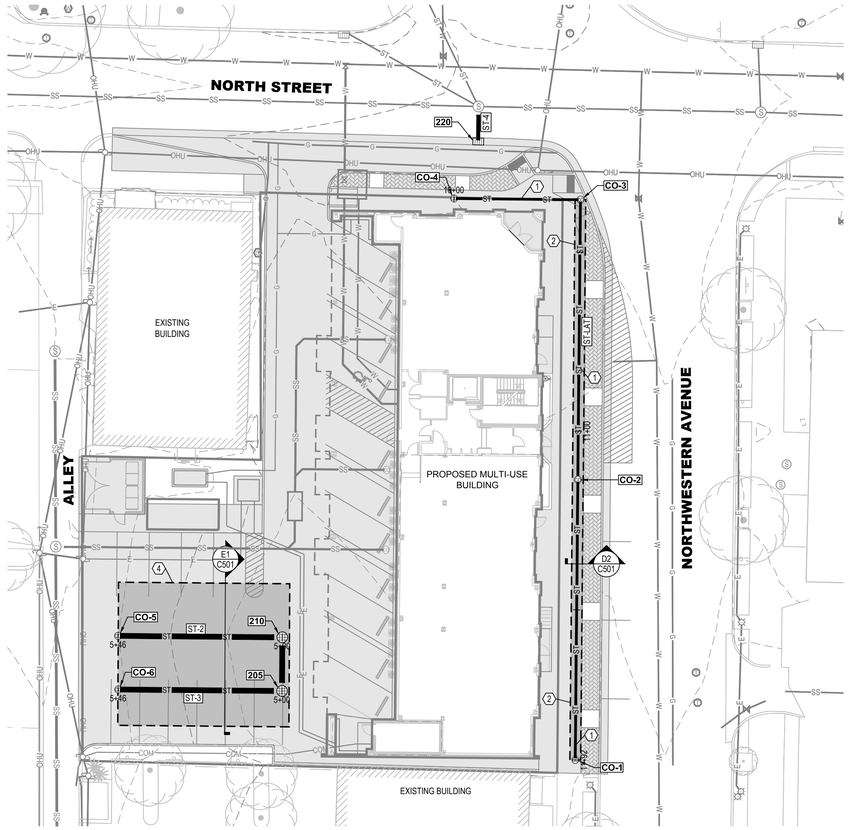

0' 20' 40'

HORIZONTAL SCALE: 1" = 20'
VERTICAL SCALE: 1" = 2'

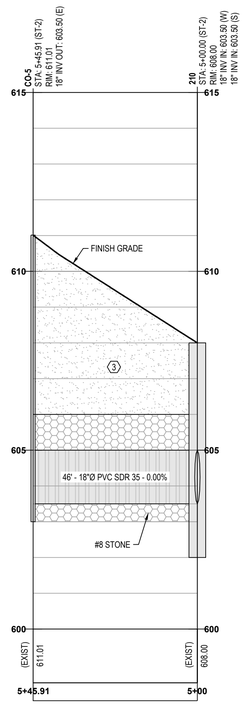

ST-2

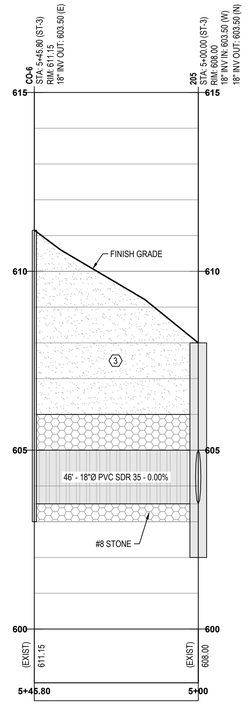

ST-3

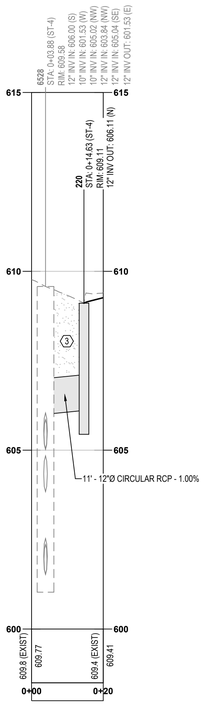

ST-4

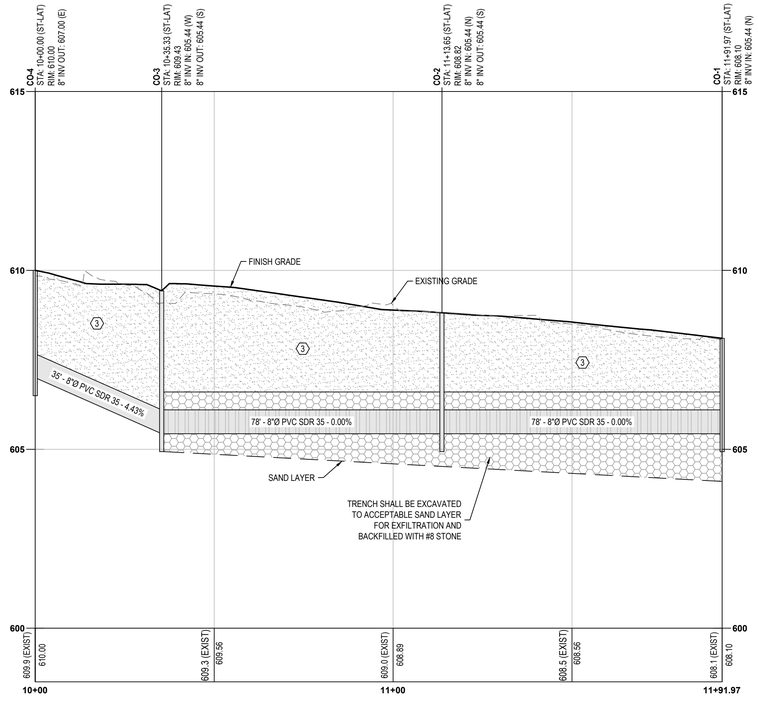

ST-LAT

PROPOSED STORM SEWER

ID	DESCRIPTION	CASTING	NORTHING	EASTING
205	4' MANHOLE (12" SUMP) SNOUT REQUIRED	R-2595-A	1885680.18	3001465.80
210	4' MANHOLE (12" SUMP) SNOUT REQUIRED	R-2595-A	1885695.18	3001465.88
220	24" X 36" BOX	R-3290-A	1885832.85	3001520.63
CO-1	CLEANOUT	R-1976	1885660.90	3001547.77
CO-2	CLEANOUT	R-1976	1885739.22	3001548.49
CO-3	CLEANOUT	R-1976	1885817.53	3001549.22
CO-4	CLEANOUT	R-1976	1885817.86	3001513.89
CO-5	CLEANOUT	R-1976	1885695.60	3001419.98
CO-6	CLEANOUT	R-1976	1885680.60	3001420.00

NOTES

1	CONTRACTOR IS RESPONSIBLE FOR COORDINATING UTILITY SERVICES AND ALL RELATED WORK WITH THE APPROPRIATE UTILITY SERVICE PROVIDER AND / OR AGENCY
2	MAINTAIN 10-FOOT HORIZONTAL SEPARATION BETWEEN OUTSIDE OF WATERMAIN AND OUTSIDE OF SEWER (SANITARY AND STORM). MAINTAIN 8-FOOT HORIZONTAL SEPARATION BETWEEN OUTSIDE OF WATERMAIN AND OUTSIDE OF STRUCTURES (SANITARY AND STORM). WHEN SUCH HORIZONTAL SEPARATION CANNOT BE MAINTAINED, SUCH AS WITH CROSSINGS, 18-INCHES VERTICAL SEPARATION SHALL BE MAINTAINED BETWEEN WATERMAIN AND SEWER. MAINTAIN 10-FOOT HORIZONTAL SEPARATION BETWEEN WATER SERVICES AND SANITARY SEWER LATERALS.
3	THE STATIONING SHOWN IN THE PROFILE ARE ALONG THE STORM SEWER ROUTE.
4	ALL CONSTRUCTION ACTIVITY SHALL BE PERFORMED IN COMPLIANCE WITH APPLICABLE OSHA STANDARDS.
5	TEMPORARY TRAFFIC CONTROL TO CONFORM TO APPLICABLE OWNER, LOCAL, AND STATE STANDARDS.

KEYNOTE INDEX ⟨X⟩

1	8" PVC DOWNSPOUT DRAINAGE COLLECTION LINE
2	STORM EXFILTRATION TRENCH
3	GRANULAR BACKFILL REQUIRED
4	STONE BASIN

IBIED
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • LAFAYETTE, INDIANA
phone: (765) 742-1900 • fax: (765) 742-1905
www.ibiedesign.com

CERTIFIED BY:

JUSTIN R. FRAZIER
REGISTERED
NO. 10606088
STATE OF INDIANA
PROFESSIONAL ENGINEER

04/29/14

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION
3	4/18/14	DRAINAGE REVISIONS
1	4/7/14	SITE REVISIONS (ENTIRE SHEET)

PROJECT NO: 13080
FILE: 13080-STORM.DWG
DRAWN BY: JRF
CHECKED BY: TRB

LOCATION:
A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:
STORM SEWER PLAN & PROFILES

C106

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\FINAL PLANS\PLOT\13080-STORM.dwg - USER: JUSTIN.FRAZIER - DATE: Tuesday, April 29, 2014 1:00:07 PM

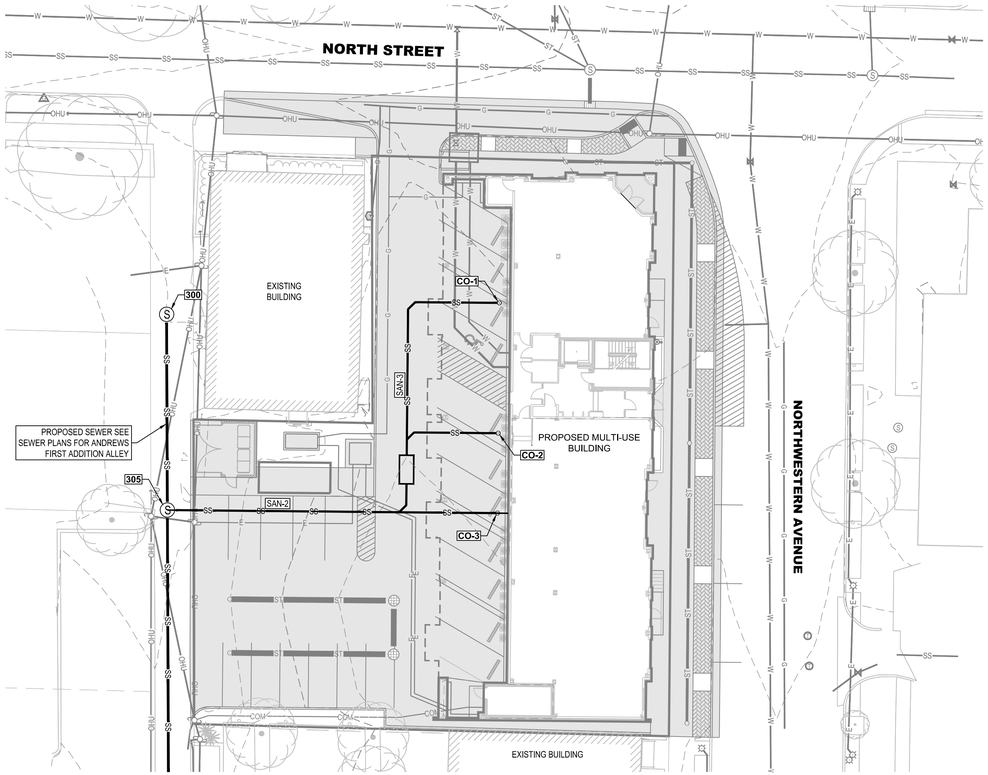

0' 20' 40'
HORIZONTAL SCALE: 1" = 20'
VERTICAL SCALE: 1" = 2'

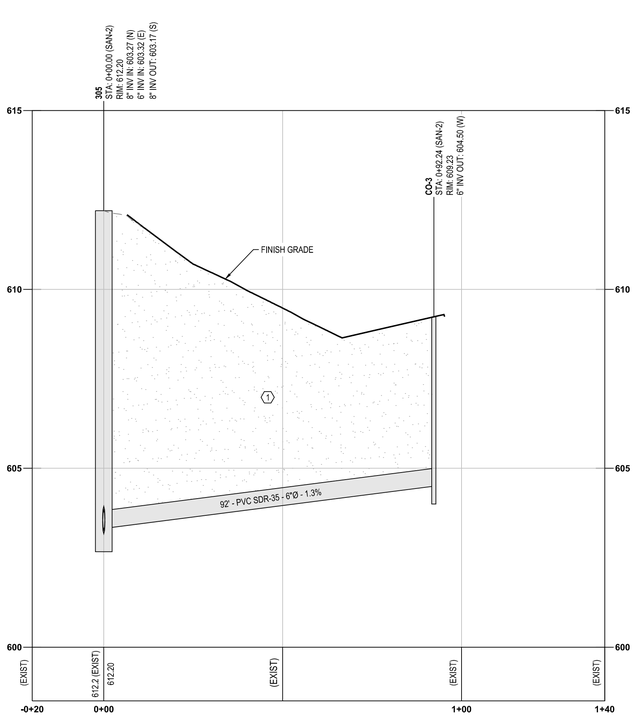

SAN-2

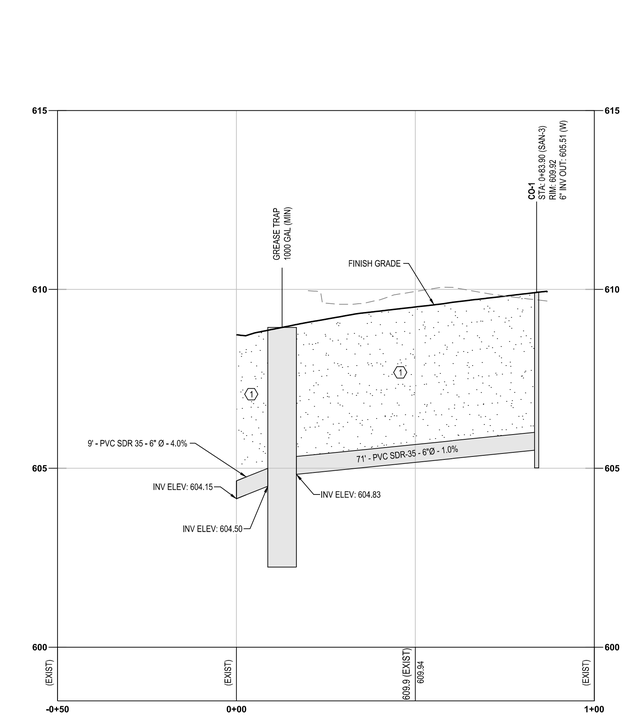

SAN-3

PROPOSED SANITARY SEWER

ID	DESCRIPTION	CASTING	NORTHING	EASTING
CO-1	CLEANOUT	R-1976	1885778.41	3001495.35
CO-2	CLEANOUT	R-1976	1885741.99	3001495.02
CO-3	CLEANOUT	R-1976	1885719.66	3001494.81

KEYNOTE INDEX

1	GRANULAR BACKFILL REQUIRED
2	PROPOSED PIPE TO TIE INTO EXISTING STRUCTURE IN ACCORDANCE WITH THE CITY OF WEST LAFAYETTE STANDARDS AND AS DIRECTED BY A REPRESENTATIVE OF THE CITY OF WEST LAFAYETTE ENGINEER'S OFFICE. SHOULD INTEGRITY OF SAID INFRASTRUCTURE BE COMPRISED (AS DETERMINED BY SAID REPRESENTATIVE), IT SHALL BE REPLACED.

NOTES

1	MAINTAIN 10-FOOT HORIZONTAL SEPARATION BETWEEN OUTSIDE OF WATERMAIN AND OUTSIDE OF SEWER. MAINTAIN 8-FOOT HORIZONTAL SEPARATION BETWEEN OUTSIDE OF WATERMAIN AND OUTSIDE OF STRUCTURES. WHEN SUCH HORIZONTAL SEPARATION CANNOT BE MAINTAINED, SUCH AS WITH CROSSING, 18-INCHES VERTICAL SEPARATION SHALL BE MAINTAINED BETWEEN WATERMAIN AND SEWER.
2	THE STATIONING SHOWN IN THE PROFILE ARE ALONG THE SEWER ROUTE.
3	VERIFY UTILITY LOCATIONS BEFORE CONSTRUCTION. RE-ROUTE UTILITIES TO ACCOMMODATE PROPOSED CONSTRUCTION.
4	SEE CITY OF WEST LAFAYETTE STANDARD DETAILS AND NOTES FOR SANITARY SEWER MATERIAL AND PIPE SPECIFICATIONS.

Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • Lafayette, Indiana
phone: (765) 742-1800 • fax: (765) 742-1905
www.trbinddesign.com

CERTIFIED BY:
JUSTIN R. FRAZIER
REGISTERED
NO. 10606088
STATE OF INDIANA
PROFESSIONAL ENGINEER
04/29/14

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION
3	4/18/14	UPDATE PLAN VIEW
1	4/7/14	UPDATE PLAN VIEW

PROJECT NO: 13080
FILE: 13080-SANITARY.DWG
DRAWN BY: JRF
CHECKED BY: TRB
LOCATION:
A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:
SANITARY SEWER PLAN & PROFILE

C107

FILE: P:\2013\13080.225 Northwestern Avenue\DRAWINGS\PLANS\FINAL PLANS\PLOT\13080-SANITARY.dwg USER: JUSTIN.FRAZIER DATE: Tuesday, April 29, 2014 1:00:34 PM

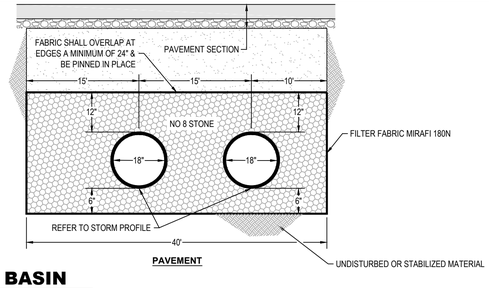

PAVEMENT

E1 EXFILTRATION BASIN
NTS

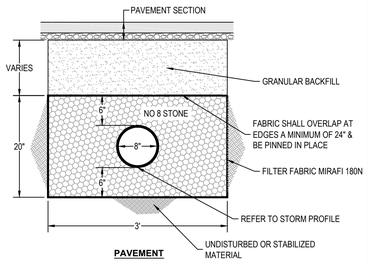

PAVEMENT

D2 DOWNSPOUT TRENCH
NTS

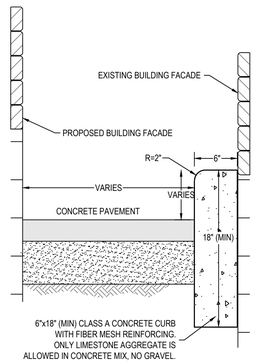

D3 OVERFLOW PATH SECTION
NTS

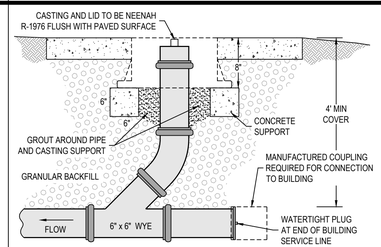

NOTE: CLEANOUT TO BE LOCATED 5' (MAX) FROM BUILDING

E4 CLEANOUT IN PAVED AREAS
NTS

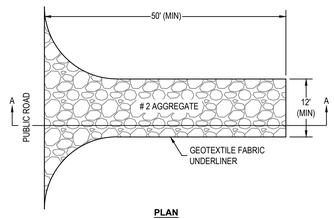

PLAN

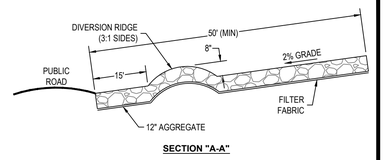

SECTION "A-A"

E5 TEMPORARY CONSTRUCTION ENTRANCE
NTS

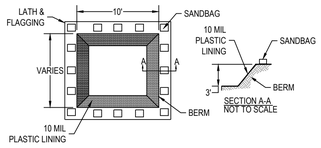

CONCRETE WASHOUT AREA SHALL BE INSTALLED PRIOR TO ANY CONCRETE PLACEMENT ON SITE. SIGNS SHALL BE PLACED AT THE CONSTRUCTION ENTRANCE, AT THE WASHOUT AREA, AND ELSEWHERE AS NECESSARY TO CLEARLY INDICATE THE LOCATION OF THE CONCRETE WASHOUT AREA TO OPERATORS OF CONCRETE TRUCKS AND PUMP RIGS. THE CONCRETE WASHOUT AREA SHALL BE PREPARED AND ENLARGED OR CLEANED OUT AS NECESSARY TO MAINTAIN CAPACITY FOR WASTED CONCRETE. AT THE END OF CONSTRUCTION, ALL CONCRETE SHALL BE REMOVED FROM THE SITE AND DISPOSED OF AT AN APPROVED WASTE SITE. WHEN THE CONCRETE WASHOUT IS REMOVED, THE DISTURBED AREA SHALL BE SEEDED AND MULCHED OR OTHERWISE STABILIZED IN AN APPROPRIATE MANNER.

D5 CONCRETE WASHOUT
NTS

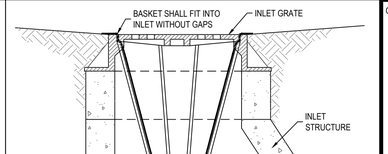

FILTER FABRIC SHALL HAVE A HIGH ENOUGH PERMITTIVITY THAT SEVERE PONDING AND CLOGGING ARE MINIMIZED AND SEDIMENT REMAINS TRAPPED ON THE FABRIC.

D6 BASKET INLET PROTECTION
NTS

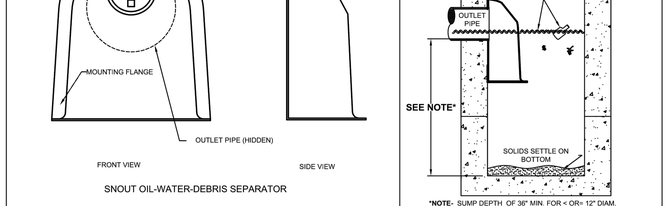

SNOUT OIL-WATER-DEBRIS SEPARATOR

*NOTE- SUMP DEPTH OF 36" MIN. FOR < OR= 12" DIAM. OUTLET. FOR OUTLETS >OR= 15", DEPTH = 2.5-3X DIAM.

NOTES:

1. ALL HOODS AND TRAPS FOR CATCH BASINS AND WATER QUALITY STRUCTURES SHALL BE AS MANUFACTURED BY:
   BEST MANAGEMENT PRODUCTS, INC.
   53 MT. ARCHER RD.
   LYME, CT 06371
   (860) 434-0277, (860) 434-3195 FAX
   TOLL FREE: (800) 504-8008 OR (888) 434-0277
   WEB SITE: www.bmpinc.com
   OR PRE-APPROVED EQUAL
2. ALL HOODS SHALL BE CONSTRUCTED OF A GLASS REINFORCED RESIN COMPOSITE WITH ISO GEL COAT EXTERIOR FINISH WITH A MINIMUM 0.125" LAMINATE THICKNESS.
3. ALL HOODS SHALL BE EQUIPPED WITH A WATERTIGHT ACCESS PORT, A MOUNTING FLANGE, AND AN ANTI-SIPHON VENT PIPE AND ELBOW AS DRAWN. (SEE CONFIGURATION DETAIL)
4. THE SIZE AND POSITION OF THE HOOD SHALL BE DETERMINED BY OUTLET PIPE SIZE AS PER MANUFACTURER'S RECOMMENDATION (SNOUT SIZE ALWAYS LARGER THAN PIPE SIZE).
5. THE BOTTOM OF THE HOOD SHALL EXTEND DOWNWARD A MINIMUM DISTANCE EQUAL TO 1/2 THE OUTLET PIPE DIAMETER WITH A MINIMUM DISTANCE OF 6" FOR PIPES <12" I.D.
6. THE ANTI-SIPHON VENT SHALL EXTEND ABOVE HOOD BY MINIMUM OF 3" AND A MAXIMUM OF 12" ACCORDING TO STRUCTURE CONFIGURATION.
7. THE SURFACE OF THE STRUCTURE WHERE THE HOOD IS MOUNTED SHALL BE FINISHED SMOOTH AND FREE OF LOOSE MATERIAL AND PIPE SHALL BE FINISHED FLUSH TO WALL.
8. THE HOOD SHALL BE SECURELY ATTACHED TO STRUCTURE WALL WITH 3/8" STAINLESS STEEL BOLTS AND OIL-RESISTANT GASKET AS SUPPLIED BY MANUFACTURER. (SEE INSTALLATION DETAIL)
9. INSTALLATION INSTRUCTIONS SHALL BE FURNISHED WITH MANUFACTURER SUPPLIED INSTALLATION KIT.
   INSTALLATION KIT SHALL INCLUDE:
   A. INSTALLATION INSTRUCTIONS
   B. PVC ANTI-SIPHON VENT PIPE AND ADAPTER
   C. OIL-RESISTANT CRUSHED CELL FOAM GASKET WITH PSA BACKING
   D. 3/8" STAINLESS STEEL BOLTS
   E. ANCHOR SHIELDS

US Patent # 6126617

INSTALLATION DETAIL

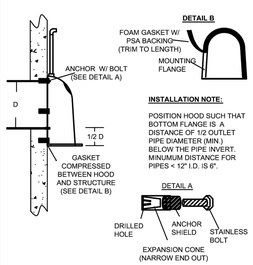

HOOD SPECIFICATION FOR CATCH BASINS AND WATER QUALITY STRUCTURES

DESCRIPTION	DATE	SCALE
OIL- DEBRIS HOOD SPECIFICATION AND INSTALLATION (TYPICAL)	09/08/00	NONE
	DRAWING NUMBER SP-SN	

A1 THE SNOUT BY BMP INC
NTS

MATERIAL LIST

1. CONCRETE VAULT (TO BE 8" x 8" x 16" CMU, OR PRECAST CONCRETE)
2. D.I. PIPING FROM CITY MAIN
3. FLANGED TEE WITH REDUCER FOR DOMESTIC SUPPLY ON SIDE OUTLET
4. FLANGED AMES 3000SS WITH ONE NRS GATE VALVE
5. POST INDICATOR VALVE WITH ELECTRIC TAMPER SWITCH
6. FLANGED TEE WITH REDUCER FOR FIRE DEPARTMENT CONNECTION
7. WAFER CHECK VALVE
8. 6" GALVANIZED PIPE GOING TO FIRE DEPARTMENT CONNECTION
9. STORZ MODEL 6638 FIRE DEPARTMENT CONNECTION (6" NPT x 5" STORZ) WITH CAP AND CHAIN
10. PIPING TO BUILDING
11. 30" x 30" ALUMINUM ACCESS HATCH (BILCO J-2AL, BILCO PCM-2, HALLIDAY W1S3030 OR EQUAL)
12. ALUMINUM OR FIBERGLASS LADDER FOR INGRESS AND EGRESS (NEEDS TO HAVE A BILCO "LADDER UP" SAFETY DEVICE OR EQUAL)
13. SUMP PIT WITH ELECTRIC SUMP PUMP (18" DIAMETER AND 12" DEEP)

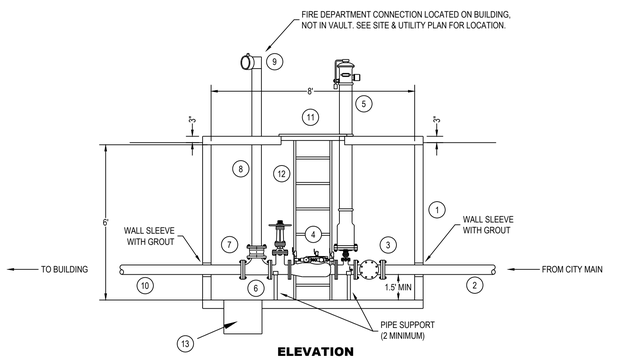

ELEVATION

PLAN VIEW

A3 FIRE LINE WATER METER VAULT
NTS

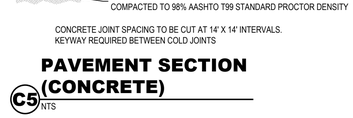

CONCRETE JOINT SPACING TO BE CUT AT 14' X 14' INTERVALS.
KEYWAY REQUIRED BETWEEN COLD JOINTS

C5 PAVEMENT SECTION (CONCRETE)
NTS

C6 PAVER ON CONCRETE
NTS

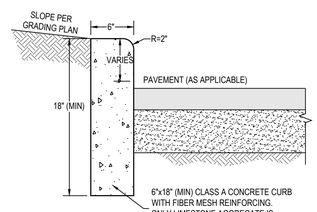

B5 STAND CURB
NTS



B6 CONCRETE GUTTER
NTS

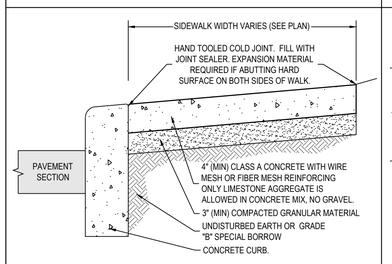

A5 CURB & WALK INTERFACE
NTS

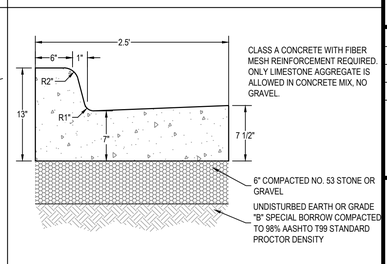

A6 CURB & GUTTER - BARRIER
NTS

IBMD
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • Lafayette, Indiana
phone: (765) 742-1800 • fax: (765) 742-1805
www.ibmdesign.com

CERTIFIED BY:
JUSTIN R. FRAZIER
REGISTERED
NO. 10606088
STATE OF INDIANA
PROFESSIONAL ENGINEER
04/29/14

225 NORTHWESTERN AVENUE
PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION
3	4/18/14	DRAINAGE REVISIONS
1	4/7/14	SITE REVISIONS

PROJECT NO:	13080
FILE:	13080-GENERAL.DWG
DRAWN BY:	JRF
CHECKED BY:	TRB

LOCATION:
A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:
DETAILS

C501

FILE: P:\2013\13080.225 Northwestern Avenue\DRAWINGS\PLANS\FINAL PLANS\PLOT\13080-GENERAL.dwg - USER: JUSTIN FRAZIER - DATE: Tuesday, April 29, 2014 2:53:11 PM

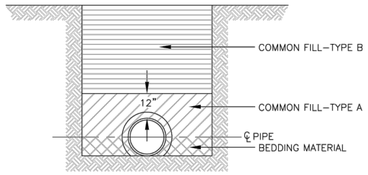

EARTH EXCAVATION

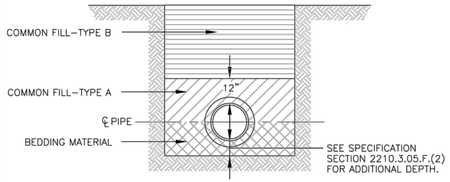

ROCK EXCAVATION

NOTE: SEE SPECIFICATION SECTIONS 2210.2.02 AND 2210.2.03 FOR DESCRIPTIONS OF BACKFILL AND BEDDING MATERIAL.

TRENCH BACKFILL MATERIALS

NO SCALE

61-300-3 SK

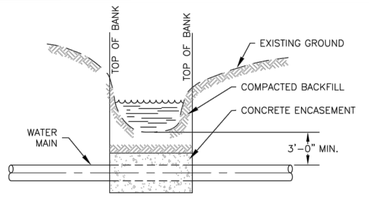

TYPICAL PROFILE

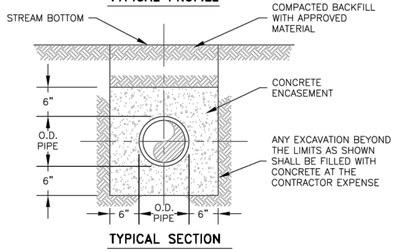

TYPICAL SECTION

NOTE: MINIMUM ENCASEMENT LIMITS ARE SHOWN ON THE DRAWINGS. THE ACTUAL LIMITS SHALL BE DETERMINED AT THE TIME OF CONSTRUCTION SUCH THAT THE ENCASEMENT TERMINATES AT A PIPE JOINT. THE JOINT SHALL BE FREE OF CONCRETE SO AS TO PROVIDE A FLEXIBLE JOINT.

STREAM CROSSING DETAIL

NO SCALE

61-300-5 SK

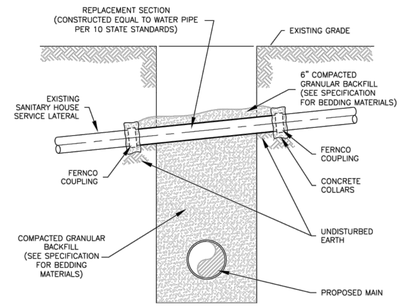

1. IF THE EXISTING SANITARY HOUSE SERVICE IS DAMAGED OR REMOVED DURING CONSTRUCTION IT SHALL BE REPLACED ACROSS THE TRENCH SUCH THAT THE CONCRETE COLLARS ARE SUPPORTED ON UNDISTURBED EARTH.
2. THE CONCRETE COLLAR SHALL BE FORMED AT A JOINT WITH THE EXISTING HOUSE LATERAL USING FERNCO COUPLINGS.
3. THE REPLACEMENT SECTION SHALL BE CONSTRUCTED EQUAL TO WATER PIPE PER WASTEWATER FACILITIES 10 STATE STANDARDS, LATEST REVISION, SECTION 30–38.32 a, WITH AN INSIDE DIAMETER EQUAL TO THE EXISTING PIPE.
4. WHEN THE OWNER OF THE SANITARY SERVICE HAS REQUIREMENTS WHICH ARE MORE STRINGENT, THE CONTRACTOR SHALL CONFORM TO THE MORE STRINGENT REQUIREMENTS AND MAKE NO CLAIM FOR ADDITIONAL COMPENSATION OR AN EXTENSION OF TIME BECAUSE OF SUCH REQUIREMENTS.

SANITARY HOUSE SERVICE REPLACEMENT DETAIL

NO SCALE

61-300-1 SK

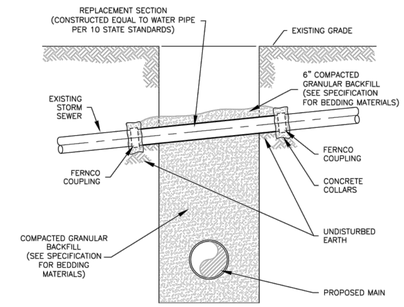

1. IF THE EXISTING STORM SEWER SERVICE IS DAMAGED OR REMOVED DURING CONSTRUCTION IT SHALL BE REPLACED ACROSS THE TRENCH SUCH THAT THE CONCRETE COLLARS ARE SUPPORTED ON UNDISTURBED EARTH.
2. THE CONCRETE COLLAR SHALL BE FORMED AT A JOINT WITH THE EXISTING STORM SEWER USING FERNCO COUPLINGS.
3. THE REPLACEMENT SECTION SHALL CONSTRUCTED EQUAL TO WATER PIPE PER WASTEWATER FACILITIES 10 STATE STANDARES, LATEST REVISION, SECTION 30–38.32a, WITH AN INSIDE DIAMETER EQUAL TO THE EXISTING PIPE.
4. WHEN THE STORM SEWER OWNER HAS REQUIREMENTS WHICH ARE MORE STRINGENT, THE CONTRACTOR SHALL CONFORM TO THE MORE STRINGENT REQUIREMENTS AND MAKE NO CLAIM FOR ADDITIONAL COMPENSATION OR AN EXTENSION OF TIME BECAUSE OF SUCH REQUIREMENTS.

STORM SEWER REPLACEMENT DETAIL

NO SCALE

61-300-2 SK

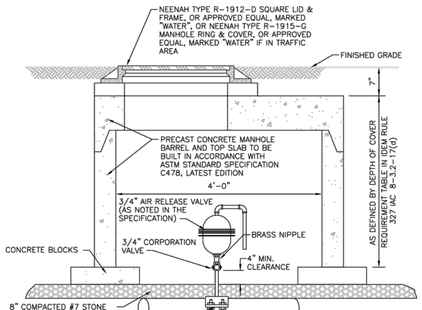

VAULT OVER MAIN

SHALLOW BURY AIR RELEASE VALVE DETAIL

NO SCALE

61-300-8A SK

THRUST BLOCK REQUIREMENTS				
FITTING	TOTAL POUNDS THRUST	TOTAL BEARING AREA (S.F.)	THRUST BLOCK	
			HEIGHT (FT.)	WIDTH (FT.)
6" 90° BEND	12,000	6	2.5	2.5
6" 45° BEND	6,700	3.5	1.75	2
6" TEE OR PLUG	8,400	4	2	2
8" 90° BEND	19,000	9	3	3
8" 45° BEND	10,500	5	2.5	2
8" TEE OR PLUG	13,500	6.5	2.75	2.5
10" 90° BEND	28,000	14	4	3.5
10" 45° BEND	15,500	8	2.75	3
10" TEE OR PLUG	19,500	10	3.5	3
12" 90° BEND	41,000	20	4	5
12" 45° BEND	23,000	12	3	4
12" TEE OR PLUG	28,000	14	3.5	4
16" 90° BEND	70,000	35	6	6
16" 45° BEND	38,000	19	4	5
16" TEE OR PLUG	50,000	25	5	5

THRUST BLOCK NOTES:

1. PIPE JOINT AND BOLTS MUST BE ACCESSIBLE.
2. CONCRETE SHALL BE CURED FOR MINIMUM OF 7 DAYS AND SHALL HAVE A COMPRESSION STRENGTH OF 3000 P.S.I. @ 28 DAYS.
3. THRUST BLOCKS SHALL BE POSITIONED TO COUNTERACT THE DIRECTION OF THE RESULTANT THRUST FORCE.
4. CONTRACTOR SHALL NOTIFY ENGINEER IF SOIL OF LESS THAN 2000 P.S.F. IS ENCOUNTERED.
5. FIVE (5) MIL POLYETHYLENE PLASTIC SHALL BE USED TO COVER FITTINGS PRIOR TO POURING THE THRUST BLOCK.

THRUST BLOCK DESIGN DATA

MAXIMUM OPERATING PRESSURE: 85 P.S.I.
SURGE ALLOWANCE: 100 P.S.I.
THRUST DESIGN PRESSURE: 185 P.S.I.
BASED ON 2000 P.S.F. SOIL

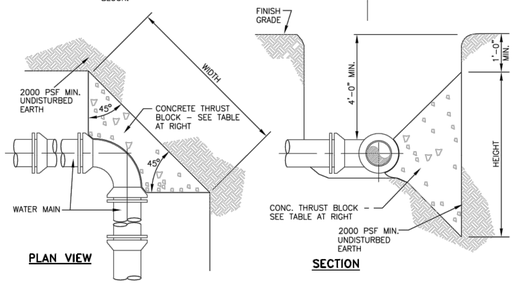

THRUST BLOCK DETAILS

NO SCALE

61-300-15 SK

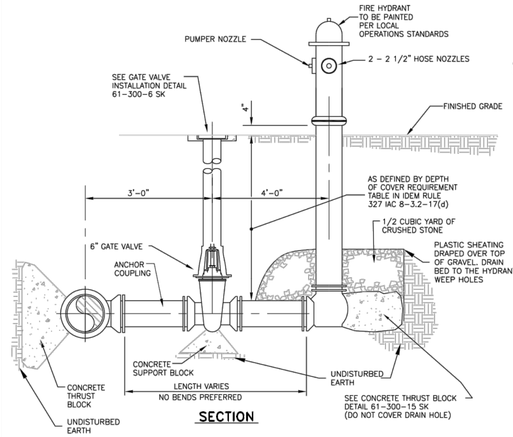

SECTION

NOTE:
THE NOTED THRUST RESTRAINT MECHANISMS ARE A MINIMUM RECOMMENDATION. LOCAL OPERATIONS SHALL OFFER PREFERENCES AND CONTRACTOR SHALL BE RESPONSIBLE FOR MEANS AND METHODS.

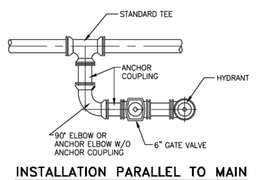

INSTALLATION PARALLEL TO MAIN



INSTALLATION PERPENDICULAR TO MAIN

FIRE HYDRANT DETAILS

NO SCALE

61-300-7 SK

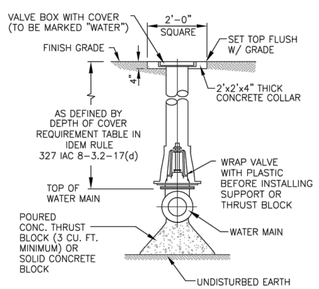

GATE VALVE INSTALLATION DETAIL

NO SCALE

61-300-6 SK

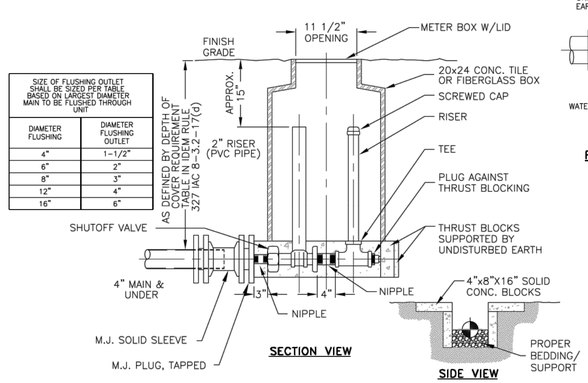

SECTION VIEW

SIDE VIEW

FOUNDATION

BLOW-OFF/FLUSHING OUTLET DETAIL

NO SCALE

61-300-9 SK

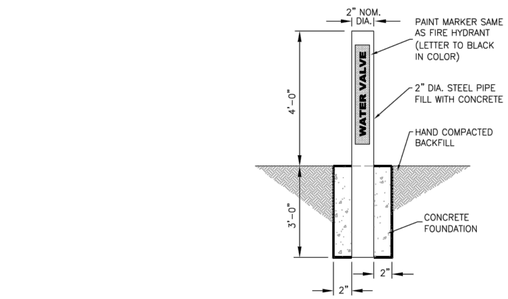

VALVE MARKER POST DETAIL

NO SCALE

31-600-14 SK

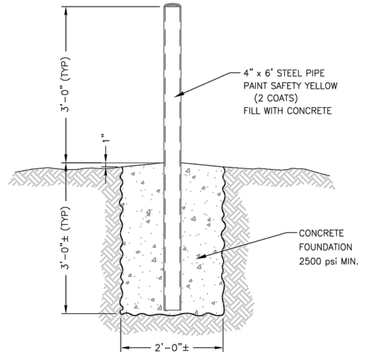

PIPE BOLLARD DETAIL

NO SCALE

31-600-13 SK

Indiana–American Water Company, Inc.

SCALE: NOT TO SCALE	WEST LAFAYETTE, INDIANA
REVISIONS	STANDARD DETAILS
	DRAWN BY: R.K.B. DATE: 5/99 CHECKED: APPROVED: SHEET 1 of 1
	AUTOCAD FILE: D:\DETAILS\STDDTLS2.DWG

IBRD
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 NORTH 10TH STREET • LAFAYETTE, INDIANA
phone: (765) 742-1800 • fax: (765) 742-1905
www.ibrddesign.com

CERTIFIED BY:

JUSTIN R. FRAZIER — REGISTERED — NO. 10606088 — STATE OF INDIANA — PROFESSIONAL ENGINEER

04/29/14

225 NORTHWESTERN AVENUE
PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION

PROJECT NO: 13080
FILE: 13080-GENERAL.DWG
DRAWN BY: JRF
CHECKED BY: TRB
LOCATION:
A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE: **DETAILS**

C502

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\FINAL PLANS\PLOT\13080-GENERAL.dwg USER: JUSTIN FRAZIER DATE: Tuesday, April 29, 2014 1:00:57 PM
P:\2005\05005 – The Willes at Stonebridge\PLANS\DWG\PLANS\05005-WM DETAILS.dwg
Mon 11, 2007 – 4:05pm

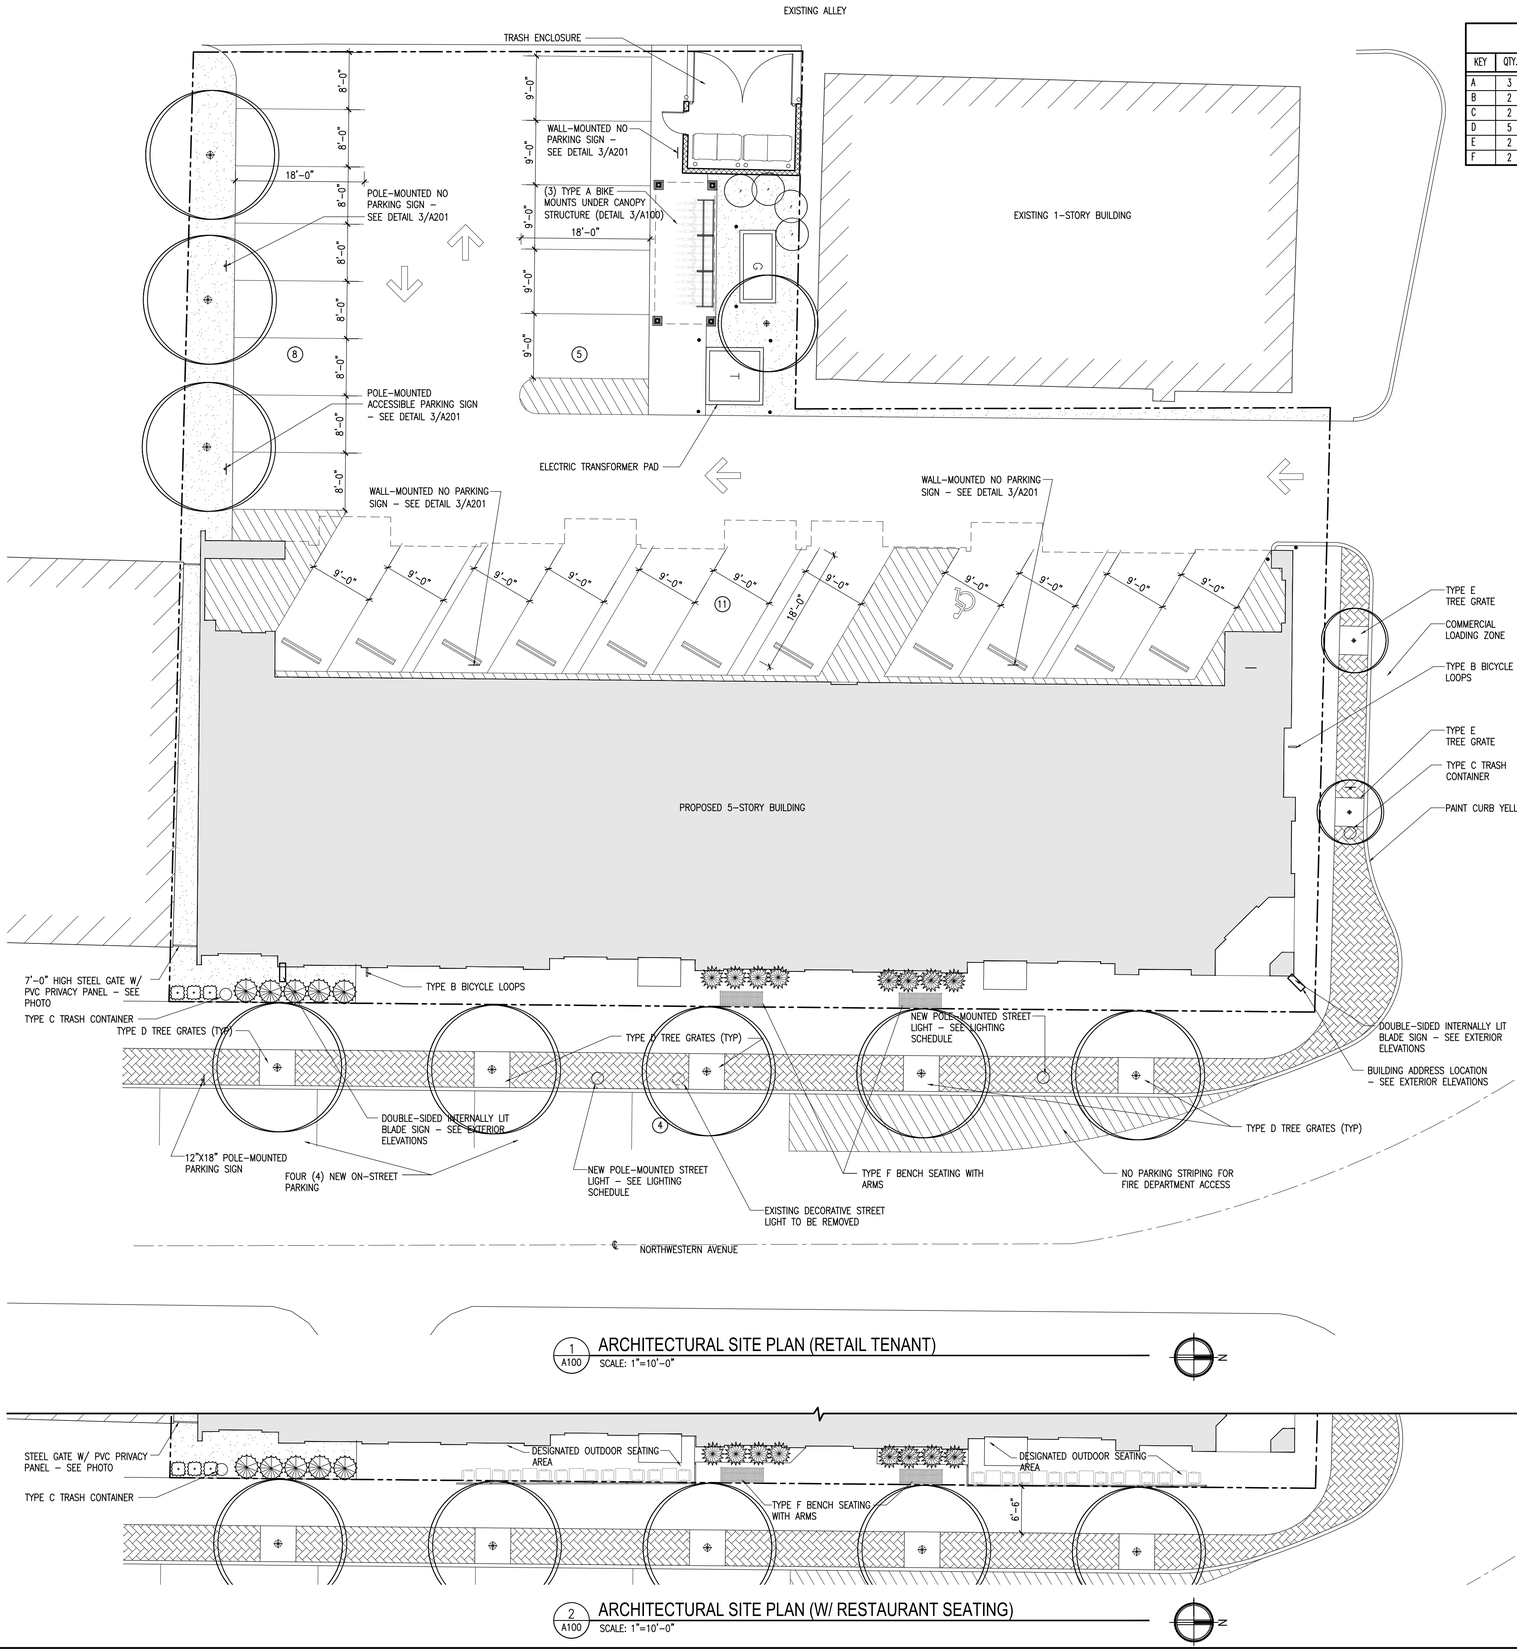

1 A100 ARCHITECTURAL SITE PLAN (RETAIL TENANT)
SCALE: 1"=10'-0"

2 A100 ARCHITECTURAL SITE PLAN (W/ RESTAURANT SEATING)
SCALE: 1"=10'-0"

STREETSCAPE SCHEDULE

KEY	QTY.	MANUFACTURER	SERIES	DESCRIPTION
A	3	BARCO	TRADITIONAL GALVANIZED BIKE RACKS	5 BIKES, GALVANIZED
B	2	COLUMBIA CASCADE	CASCADE ORIGINAL CYCLOOPS 2170-3-E	2 BIKES, BLACK
C	2	COLUMBIA CASCADE	CASCADE RENAISSANCE 2814-DT-P	W/ 2000-P-7 LINER
D	5	NEENAH FOUNDRY	ADIRONDACK COLLECTION R760-A1 60X60	5' TREE GRATE
E	2	NEENAH FOUNDRY	ADIRONDACK COLLECTION R742-A1 48X48	4' TREE GRATE
F	2	COLUMBIA CASCADE	CASCADE RENAISSANCE 2806-6	6' BENCH W/ ARMRESTS

SITE PLAN INFORMATION:

ZONING CLASSIFCATION:
CBW TO PDMX (PLANNED DEVELOPMENT)

PARKING PROVIDED
REGULAR = 23 SPACES
ACCESSIBLE = 1 SPACES
TOTAL ONSITE PARKING PROVIDED = 24 SPACES

ADDITIONAL RESIDENTIAL PARKING IS BEING PROVIDED OFF-SITE. SEE NARRATIVE ON SHEET 2 FOR DETAILS.

LOT COVERAGE
LOT AREA = 16,784 S.F. (.385 ACRES)
BUILDING COVERAGE = 8,936 S.F. (53.2%)
VEGETATION COVERAGE = 1,170 S.F. (7.0%)

BUILDING HEIGHT = 64'-0"

PROPOSED BUILDING SETBACKS
EAST FRONT YARD SETBACK = 2'-0"
SOUTH SIDE YARD SETBACK = 3'-6"
NORTH SIDE YARD SETBACK = 0'-0"
WEST REAR YARD SETBACK = 17'-0"

RETAIL SPACE = 5,200 S.F. MAX.

UNIT MIX
SECOND FLOOR
(9) 1-BEDROOM UNITS PER FLOOR = 9 BEDS
(1) 2-BEDROOM UNITS PER FLOOR = 2 BEDS
(1) 3-BEDROOM UNITS PER FLOOR = 3 BEDS
THIRD FLOOR
(9) 1-BEDROOM UNITS PER FLOOR = 9 BEDS
(1) 2-BEDROOM UNITS PER FLOOR = 2 BEDS
(1) 3-BEDROOM UNITS PER FLOOR = 3 BEDS
FOURTH FLOOR
(9) 1-BEDROOM UNITS PER FLOOR = 9 BEDS
(1) 2-BEDROOM UNITS PER FLOOR = 2 BEDS
(1) 3-BEDROOM UNITS PER FLOOR = 3 BEDS
FIFTH FLOOR
(9) 1-BEDROOM UNITS PER FLOOR = 9 BEDS
(1) 2-BEDROOM UNITS PER FLOOR = 2 BEDS
(1) 3-BEDROOM UNITS PER FLOOR = 3 BEDS
TOTAL
44 UNITS = 56 BEDS (MAX.)

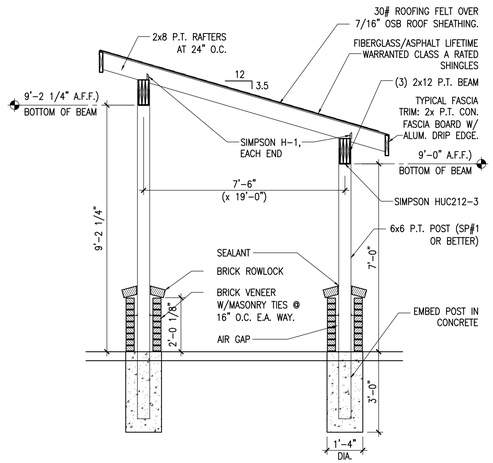

3 A100 BIKE STRUCTURE
SCALE: 3/8"=1'-0"

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

FINAL DETAILED PLANS
04 / 30 / 2014

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:
REGISTERED JOHN KEVIN GOOD No. 10600148 STATE OF INDIANA ARCHITECT

PROJECT DATE:
04.30.14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
ARCHITECTURAL SITE PLAN

SHEET NUMBER:
A100

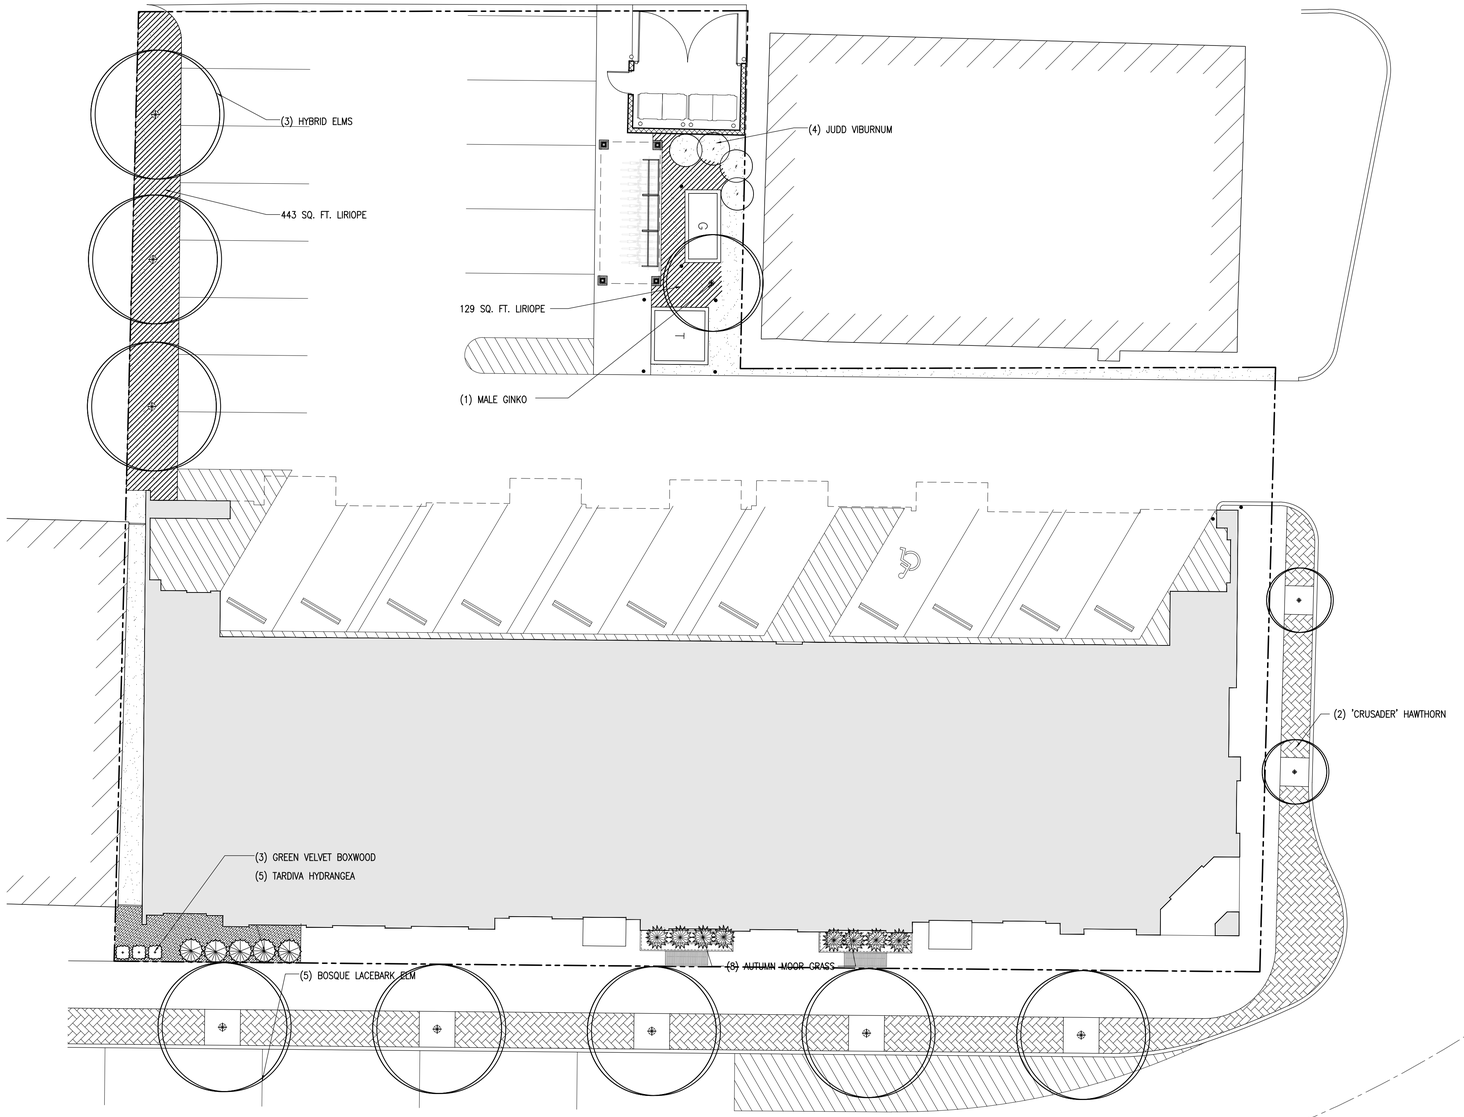

1 A101 LANDSCAPING PLAN
SCALE: 1"=10'-0"

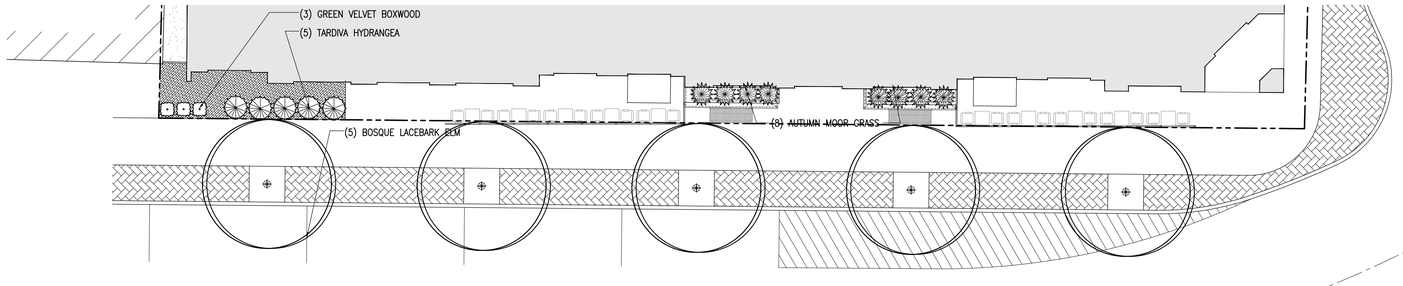

PLANT SCHEDULE

KEY	QTY.	BOTANICAL NAME	COMMON NAME	SIZE
TREES				
UxH	3	ULMUS X HYBRID	HYBRID ELM	2-1/2" CAL.
UpU	5	ULMUS PARVIFOLIA 'UPMTF'	BOSQUE LACEBARK ELM	2-1/2" CAL.
CcC	2	CRATAEGUS CRUSGALLI 'CRUSADER'	'CRUSADER' HAWTHORN	2-1/2" CAL.
GB	1	GINKGO BILOBA	GINKGO (MALE ONLY)	1-1/2" CAL.
SHRUBS				
BGV	3	BUXUS X 'GREEN VELVET'	GREEN VELVET BOXWOOD	18"
CsL	5	CORNUS SERICEA 'ISANTI'	ISANTI RED TWIG DOGWOOD	24"
ViB	4	VIBURNUM X JUDDI	JUDD VIBURNUM	36"
ORNAMENTAL GRASSES				
Sa	8	SESLERIA AUTUMNALIS	AUTUMN MOOR GRASS	1G
GROUNDCOVERS				
Ls	572 SQ. FT.	LIRIOPE SPICATA	LIRIOPE	4"

LANDSCAPE GENERAL NOTES

1. IN CASE OF DISCREPANCIES BETWEEN THE PLAN AND PLANT LIST, THE PLAN SHALL DICTATE. IF IN QUESTION, CONTACT THE LANDSCAPE ARCHITECT & THE WEST LAFAYETTE REDEVELOPMENT AND GREENSPACE ADMINISTRATOR.
2. ALL SHRUB PLANTING AREAS TO BE COVERED WITH 3" THICK LAYER OF SHREDDED HARDWOOD BARK MULCH. ALL PERENNIAL BEDS SHALL BE COVERED WITH 1" SHREDDED HARDWOOD BARK MULCH. BARK MULCH SHALL BE APPROVED BY LANDSCAPE ARCHITECT AND SHALL BE UNIFORM IN TEXTURE AND COLOR AND SHALL BE OBTAINED FROM SAWMILL OR LUMBERING OPERATIONS. NO UTILITY MULCH OR PROCESSED TREE TRIMMINGS WILL BE ALLOWED.
3. AN APPROVED PRE-EMERGENT HERBICIDE SHALL BE APPLIED IN ALL PLANTING AND GROUND COVER BEDS AT RATES SPECIFIED BY MANUFACTURER FOR EACH VARIETY OF PLANT.
4. FINAL PLACEMENT OF PLANT MATERIALS, ETC. SHALL BE APPROVED BY LANDSCAPE ARCHITECT AND THE WEST LAFAYETTE GREENSPACE ADMINISTRATOR BEFORE PLANTING OPERATIONS ARE TO PROCEED. ALL TREE LOCATION SHALL BE MARKED WITH A WOODEN STAKE INDICATING VARIETY AND SIZE OF TREE. ALL STAKES SHALL BE REMOVED FOLLOWING PLANTING OPERATIONS.
5. SUBSTITUTIONS OF PLANT MATERIAL WILL BE ALLOWED SUBJECT TO WEST LAFAYETTE STANDARDS. IF PLANTS ARE SHOWN TO BE UNAVAILABLE, THE CONTRACTOR SHALL NOTIFY LANDSCAPE ARCHITECT PRIOR TO BID DATE IN WRITING & SUBJECT TO WEST LAFAYETTE APPROVAL. ALL PLANTS SHALL BE INSPECTED AND TAGGED WITH PROJECT IDENTIFICATION AT NURSERY OR CONTRACTORS OPERATION PRIOR TO MOVING TO JOB SITE. PLANTS MAY ALSO BE INSPECTED AND APPROVED OR REJECTED ON THE JOB SITE.
6. ALL PLANTS ARE TO MEET OR EXCEED THE MOST CURRENT EDITION OF THE WEST LAFAYETTE CITY STANDARDS.
7. PLANTS AND ALL OTHER MATERIALS TO BE STORED ON SITE WILL BE PLACED WHERE THEY WILL NOT CONFLICT WITH CONSTRUCTION OPERATIONS AND AS DIRECTED BY OWNER.
8. ALL NEW LANDSCAPE PLANTING SHALL BE GUARANTEED FOR A PERIOD OF ONE YEAR FOLLOWING FINAL INSPECTON BY LANDSCAPE ARCHITECT. AT THE END OF THIS PERIOD, PLANT MATERIAL TERMED DEAD OR UNSATISFACTORY BY LANDSCAPE ARCHITECT SHALL BE REPLACED AT NO ADDITIONAL CHARGE BY THE LANDSCAPE CONTRACTOR.
9. THE LANDSCAPE CONTRACTOR SHALL OBTAIN AND PAY FOR ALL PERMITS AND FEES THAT MAY BE REQUIRED FOR HIS PORTION OF WORK.
10. PEAT MOSS TO BE USED ON PROJECT SHALL BE A DOMESTIC OR IMPORTED MATERIAL, CHOCOLATE BROWN IN COLOR AND COMPOSED OF PARTIALLY DECOMPOSED VEGETABLE MATERIAL. PEAT MOSS TO ALSO BE MILDLY ACIDIC IN CHARACTER AND SHALL MEET APPROVAL OF LANDSCAPE ARCHITECT.
11. LANDSCAPE CONTRACTOR SHALL NOTIFY LANDSCAPE ARCHITECT & THE CITY OF WEST LAFAYETTE REDEVELOPMENT & GREENSPACE ADMINISTRATOR IN WRITING PRIOR TO BID DATE OF ANY PLANTS THAT HE FEELS MAY NOT SURVIVE IN LOCATIONS NOTED.
12. ALL DISTURBED LAWN AREAS SHALL BE SODDED OR SEEDED AS NOTED. LAWNS SHALL BE SODDED OR SEEDED WITH SEED MIX AS APPROVED BY LANDSCAPE ARCHITECT.
13. ALL LAWNS SHALL BE GUARANTEED TO HAVE A FULL UNIFORM STAND OF ACCEPTABLE GRASS AT END OF ONE YEAR GUARANTEE PERIOD WITH NO BARE SPOTS COMPRISING MORE THAN 2% OF ANY LAWN AREA. ANY AREA SO NOTED WILL BE RESODDED UNTIL AN ACCEPTABLE STAND OF GRASS IS ESTABLISHED.
14. ALL LANDSCAPING PLANTINGS TO BE MAINTAINED FOR 60 DAYS FOLLOWING FINAL INSPECTION BY LANDSCAPE ARCHITECT. ALL SEEDED LAWNS TO BE MAINTAINED FOR A PERIOD OF 60 DAYS AND SODDED LAWNS 30 DAYS FOLLOWING FINAL INSPECTION BY LANDSCAPE ARCHITECT AFTER WRITTEN REQUEST FROM LANDSCAPE CONTRACTOR. MAINTENANCE TO INCLUDE WATERING WEEDING, CULTIVATION, MULCHING, MOWING AND ALL OTHER NECESSARY OPERATIONS REQUIRED FOR PROPER ESTABLISHMENT OF LAWNS AND PLANTINGS.
15. CONTRACTOR TO SUBMIT UNIT PRICES ON EVERY TYPE OF WORK AS REQUESTED BY LANDSCAPE ARCHITECT.
16. ALL LAWN AREAS WITHIN BASE PROJECT SITE TO RECEIVE 4-6" APPROVED TOPSOIL PRIOR TO SODDING OR SEEDING OPERATIONS.
17. BACKFILL FOR TREE AND SHRUB PLANTING SHALL BE 75% APPROVED TOPSOIL AND 25% APPROVED PEAT MOSS. TOP LAYER OF BACKFILL SHALL BE 100% EXISTING TOPSOIL. A 5-10-5 ANALYSIS SLOW RELEASE FERTILIZER SHALL BE INCORPORATED INTO BACKFILL AT APPROVED RATES.
18. PROVIDE MINIMUM 6" PLANTING SOIL IN ALL GROUND COVER AND FLOWER AREA WITH A MIXTURE COMPRISED OF ONE PART COMPOSTED MANURE, 5 PARTS TOPSOIL AND 4 PARTS PEAT MOSS. A FULL 4" LAYER OF APPROVED SHREDDED FIBROUS PEAT MOSS MAY BE USED IN LIEU OF PLANTING MIX.
19. LAWNS SHALL BE SEEDED FOLLOWING SCARIFYING, FINAL GRADING, FERTILIZING AND RAKING. LAWN AREAS SHALL BE FERTILIZED WITH 12-12-12 ANALYSIS FERTILIZER AT THE RATE OF 10 LBS./1000 S.F. AND LIME APPLIED AS DICTAED BY SOILS TESTS PRIOR TO SEEDING.
20. IT IS THE LANDSCAPE CONTRACTOR'S RESPONSIBILITY TO NOTIFY ALL UTILITY COMPANIES 72 HOURS BEFORE CONSTRUCTION IS TO START TO VERIFY IF ANY UTILITIES ARE PRESENT ON SITE. ALL VERIFICATIONS (LOCATIONS, SIZE AND DEPTH) SHALL BE MADE BY THE APPROPRIATE UTILITY COMPANIES. WHEN EXCAVATIONIS AROUND OR OVER EXISTING UTILITIES, THE CONTRACTOR MUST NOTIFY THE UTILITY COMPANY SO A REPRESENTATIVE OF THE UTILITY COMPANY CAN BE PRESENT TO INSTRUCT AND OBSERVE DURING THE EXCAVATION.
21. TREE PRESERVATION NOTE: PROTECT EXISTING TREES THAT ARE TO BE SAVED BY ERECTING CONSTRUCTION FENCE AROUND THESE TREES BEFORE ANY SITE WORK BEGINS. PLACE FENCING AT LEAST AT THE DRIPLINE OF THE TREE AND FURTHER FROM THE TRUNK IF POSSIBLE. THE FENCED AREA IS TO BE KEPT CLEAR OF BUILDING MATERIALS, WASTE AND EXCESS SOIL. NO DIGGING, TRENCHING, COMPATION, OR OTHER SOIL DISTURBANCE IS ALLOWED IN THE FENCED AREAS.
22. CHANGES TO THE LANDSCAPE PLANTING AT THE FRONT OF THE BUILDING TO ALLOW FOR FLEXIBLE TENANT SPACE ON THE FIRST FLOOR SHALL BE ALLOWED W/ THE CITY OF WEST LAFAYETTE GREENSPACE ADMINISTRATOR'S APPROVAL

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

FINAL DETAILED PLANS
04 / 30 / 2014

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:

PROJECT DATE:
04.30.14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
LANDSCAPING PLAN

SHEET NUMBER:
A101

4 A105 BIKE RACK B - EXAMPLE
SCALE: NOT TO SCALE

3 A105 BIKE RACK A - EXAMPLE
SCALE: NOT TO SCALE

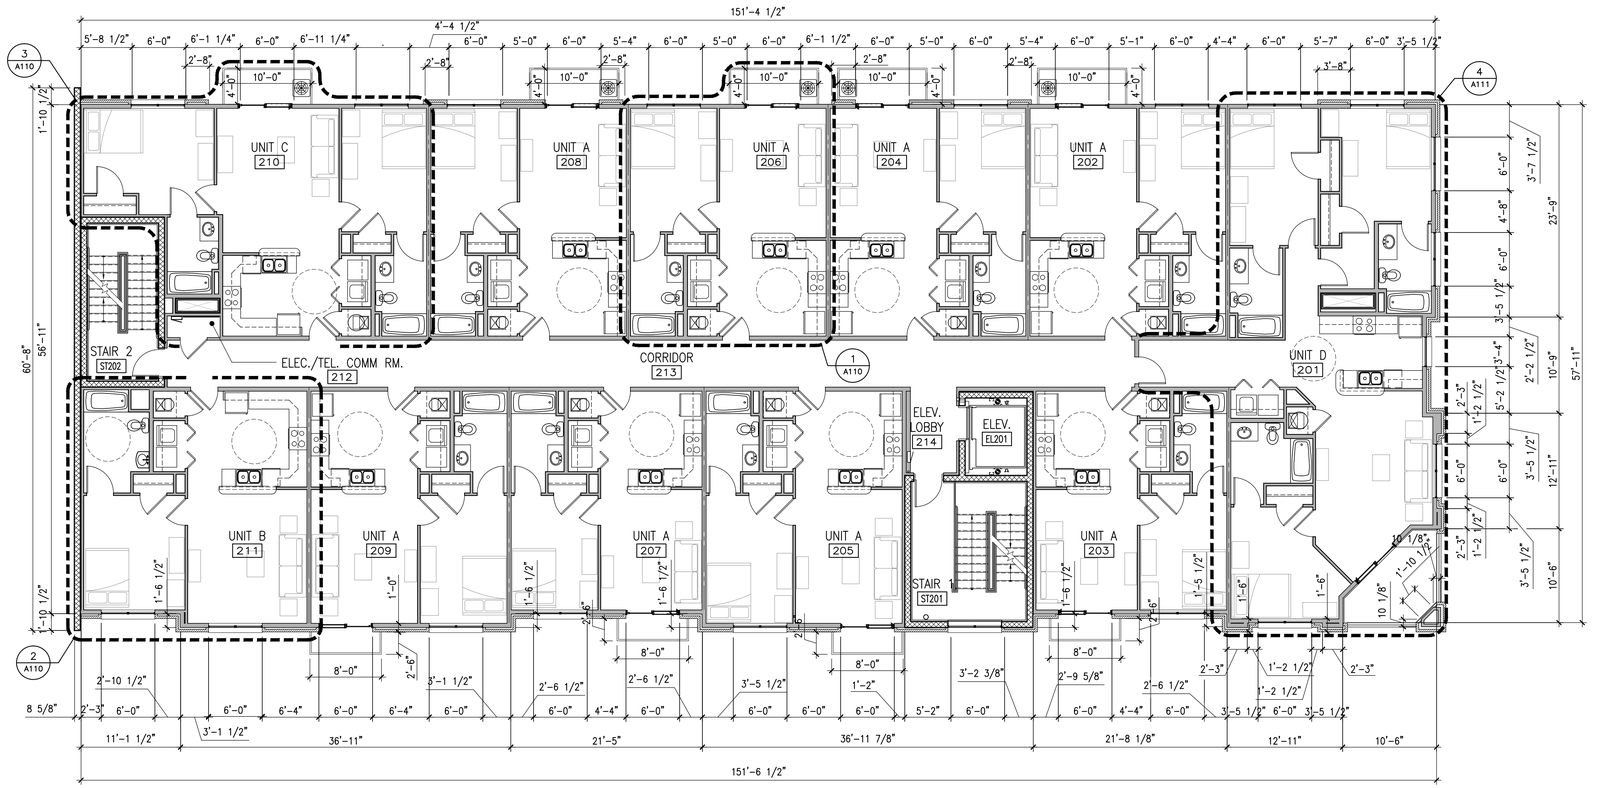

2 A105 2ND - 5TH FLOOR PLAN
SCALE: 1/8"=1'-0"

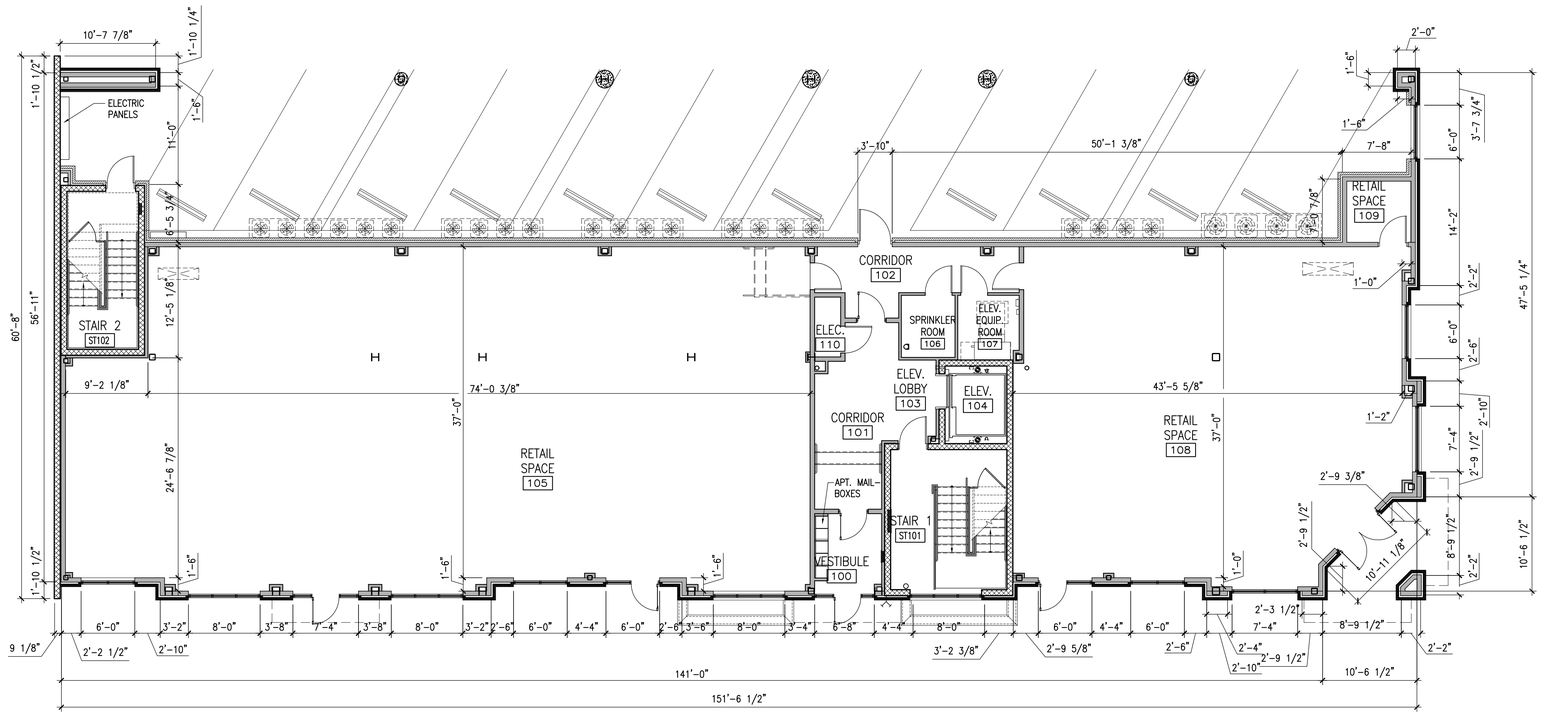

1 A105 FIRST FLOOR PLAN
SCALE: 1/8"=1'-0"

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

FINAL DETAILED PLANS
04 / 30 / 2014

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:
REGISTERED No. 19600148 STATE OF INDIANA ARCHITECT

PROJECT DATE:
04.30.14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
1ST-2ND FLOOR PLANS

SHEET NUMBER:
A105

2 A106 4TH FLOOR PLAN
SCALE: 1/8"=1'-0"

1 A106 3RD FLOOR PLAN
SCALE: 1/8"=1'-0"

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

FINAL DETAILED PLANS
04 / 30 / 2014

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:

JOHN KELLY GOOD REGISTERED NO. 10960146 STATE OF INDIANA ARCHITECT

PROJECT DATE:
04.30.14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
3RD-4TH FLOOR PLANS

SHEET NUMBER:
A106

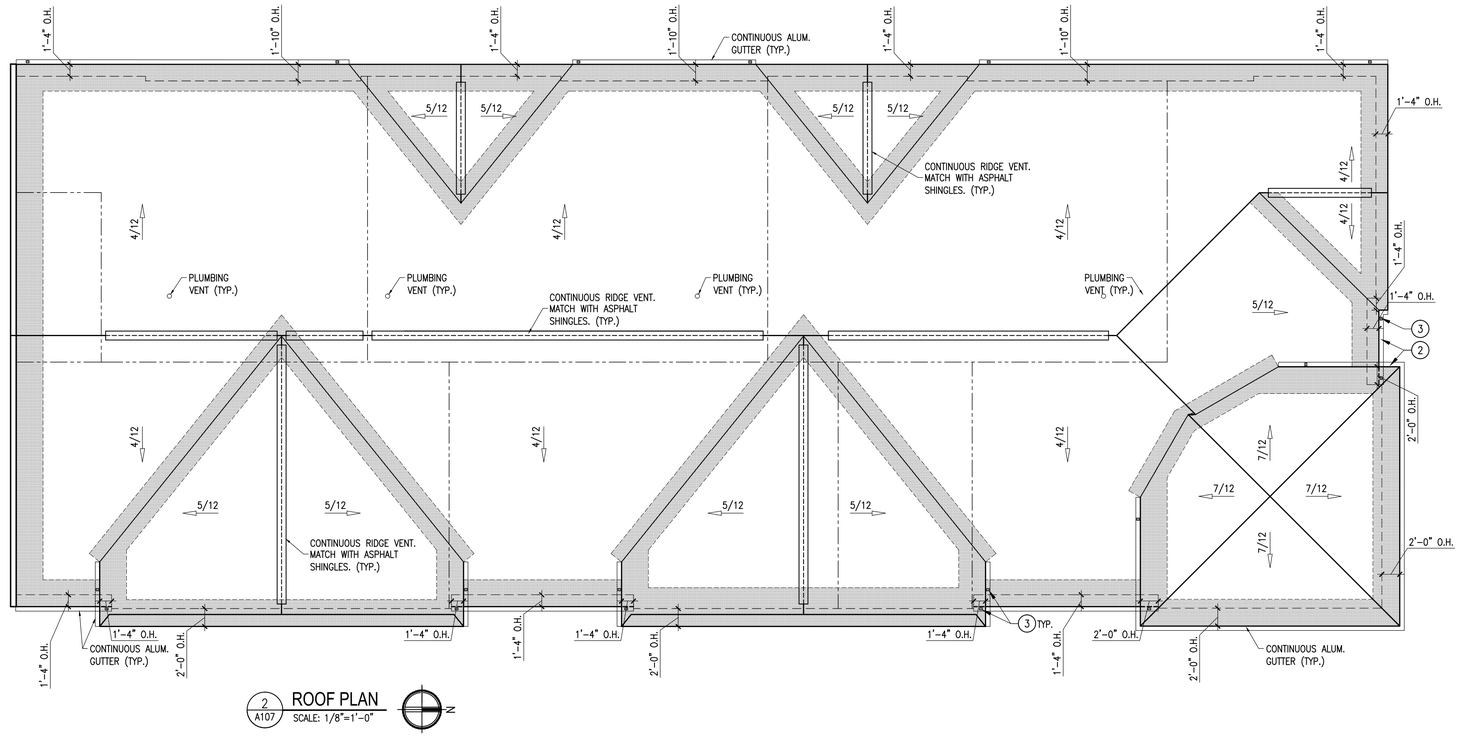

2 A107 ROOF PLAN
SCALE: 1/8"=1'-0"

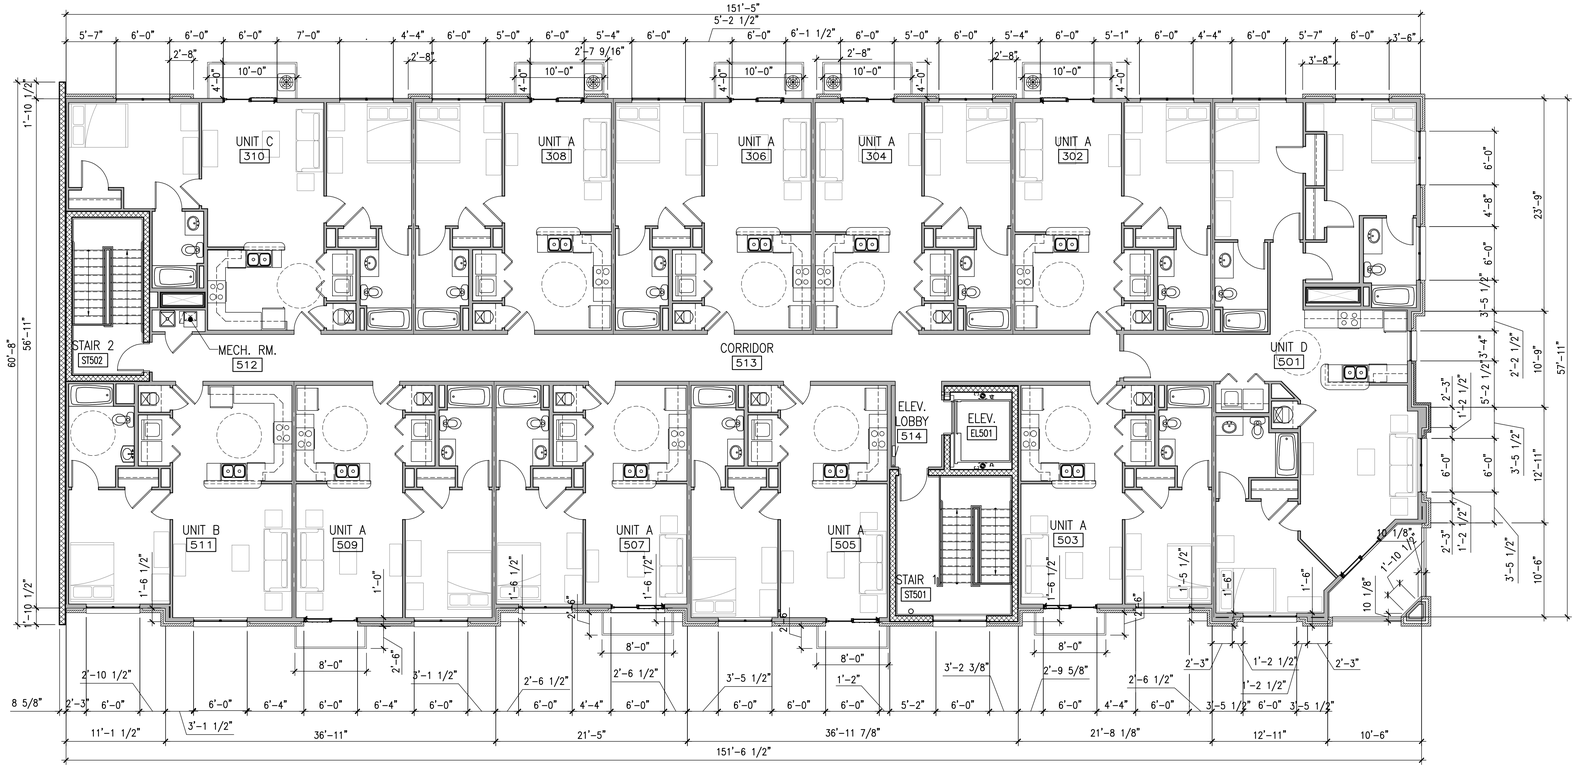

1 A107 FIFTH FLOOR PLAN
SCALE: 1/8"=1'-0"

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

FINAL DETAILED PLANS
04 / 30 / 2014

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:
JOHN GOOD — REGISTERED — NO. 19600148 — STATE OF INDIANA — ARCHITECT

PROJECT DATE:
04.30.14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
5TH FLOOR PLAN

SHEET NUMBER:
A107

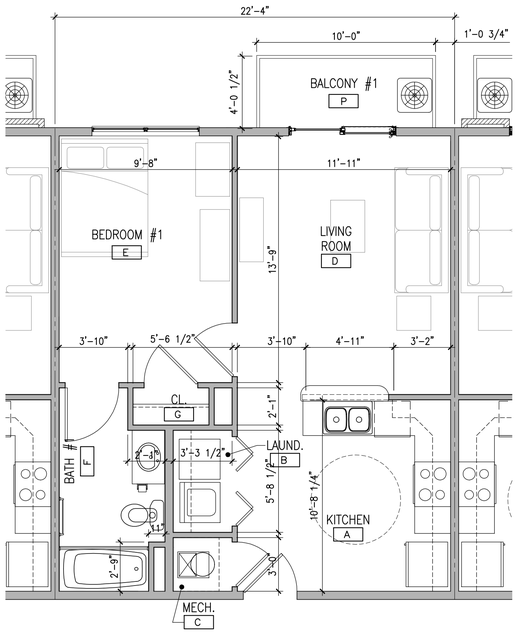

1 A110 UNIT A
SCALE: 1/4"=1'-0"

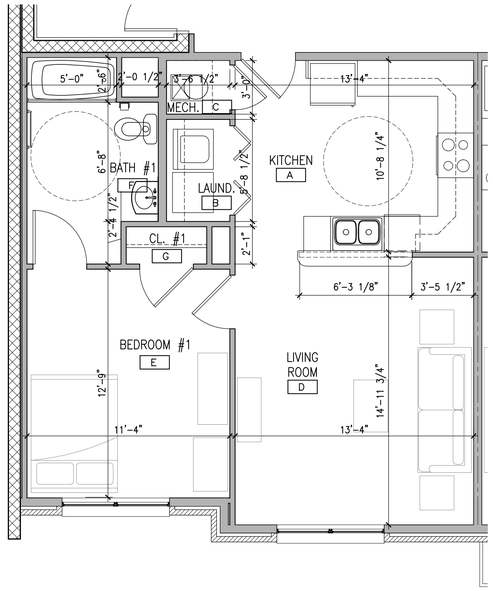

2 A110 UNIT B
SCALE: 1/4"=1'-0"

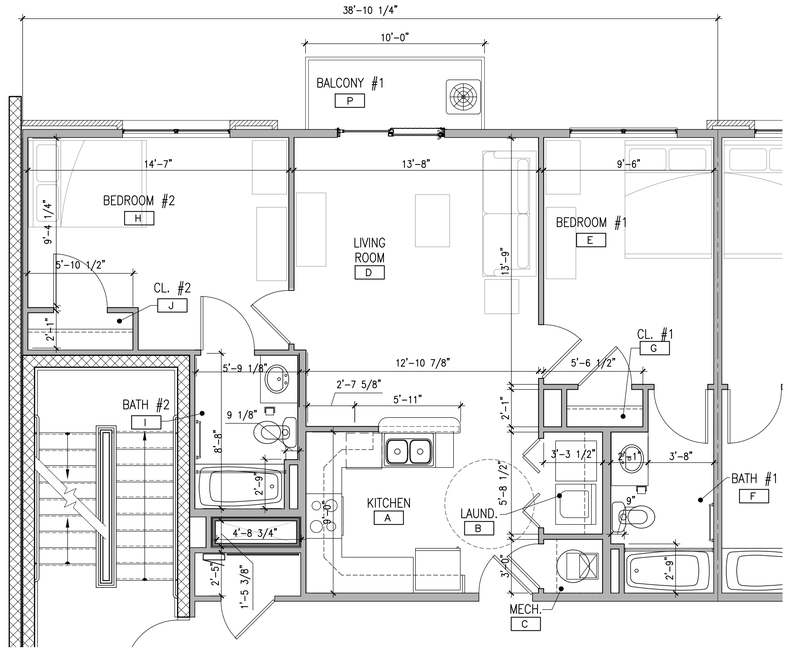

3 A110 UNIT C
SCALE: 1/4"=1'-0"

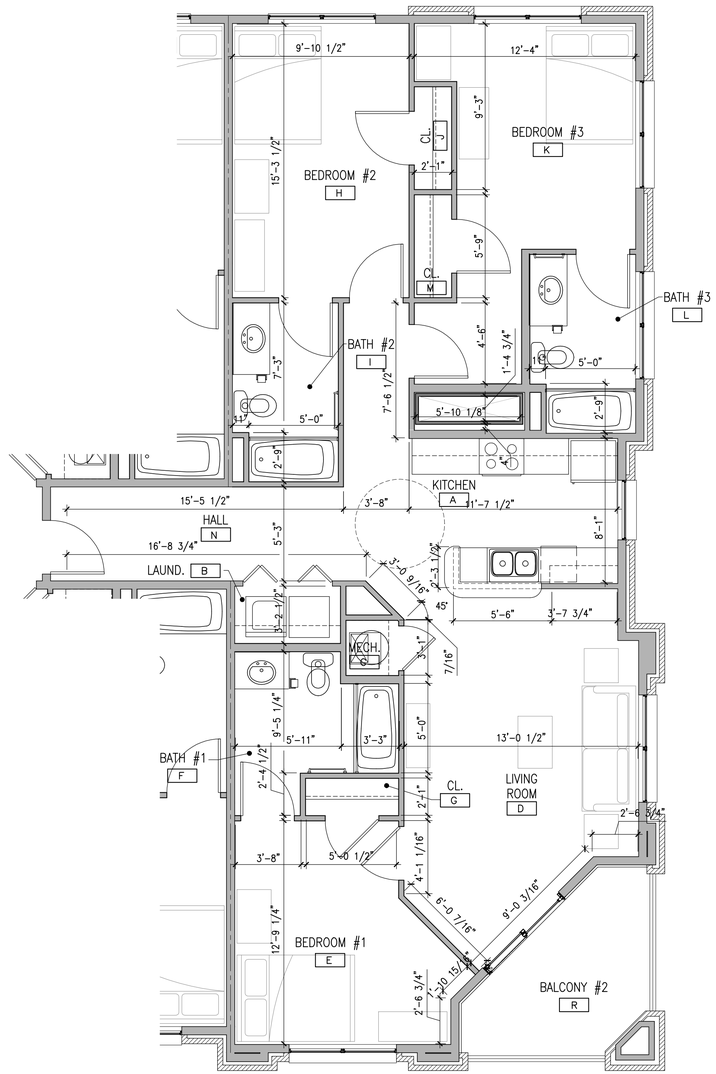

4 A110 UNIT D
SCALE: 1/4"=1'-0"

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

FINAL DETAILED PLANS
04 / 30 / 2014

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:

REGISTERED JOHN GOOD No. 19600148 STATE OF INDIANA ARCHITECT

PROJECT DATE:
04.30.14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER:	DRAWN BY:
A2013.087	BGK

DRAWING TITLE:
UNIT PLANS

SHEET NUMBER:
A110

5 A200 STREETSCAPE TRASH CONTAINER
SCALE: N.T.S

4 A200 STREETSCAPE BENCH
SCALE: N.T.S

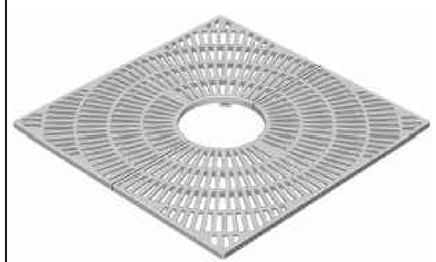

3 A200 TREE GRATE EXAMPLE
SCALE: N.T.S

2 A200 EAST ELEVATION
SCALE: 1/8"=1'-0"

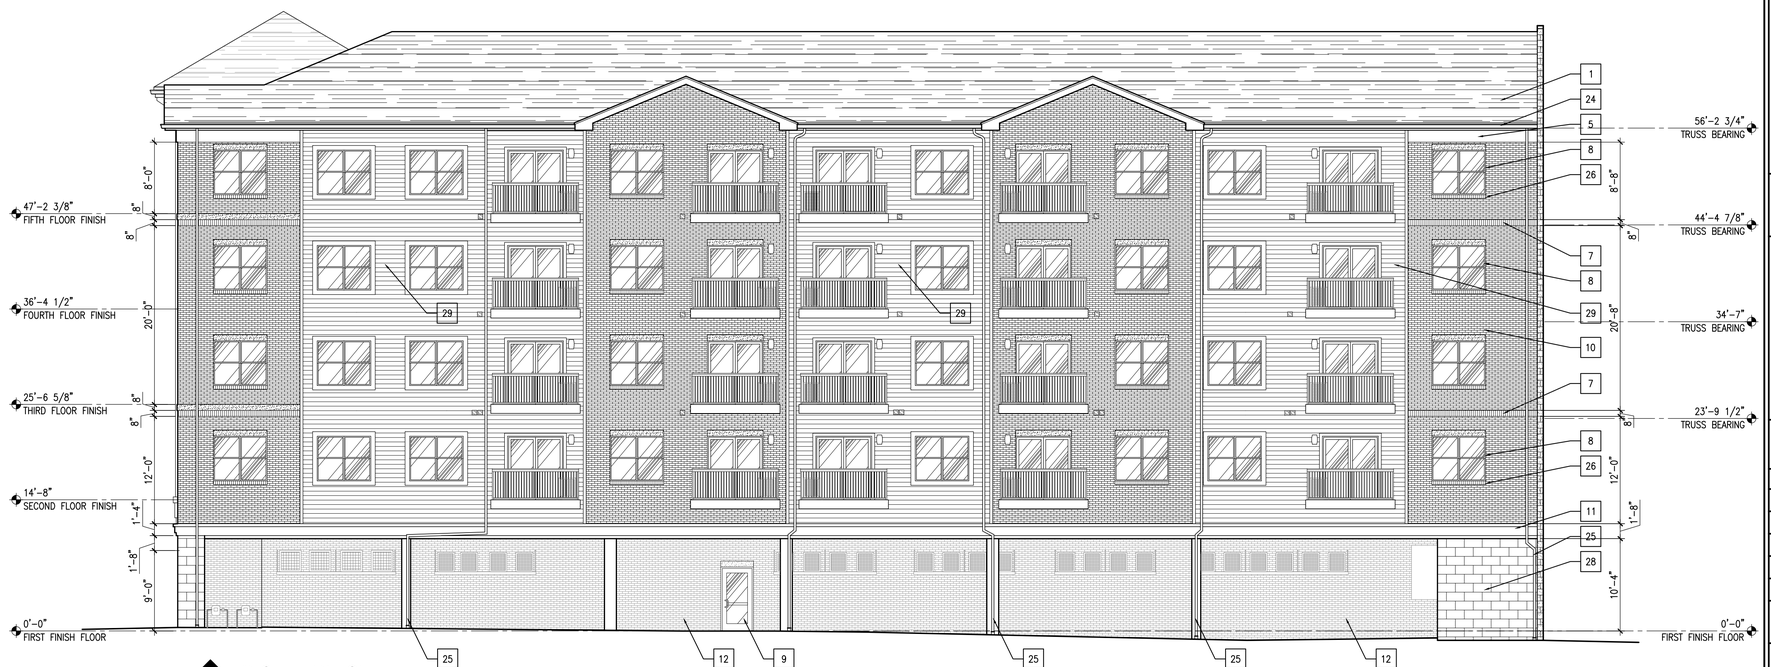

2 A200 WEST ELEVATION
SCALE: 1/8"=1'-0"

ELEVATION KEYNOTES

1. ARCHITECTURAL SHINGLE ROOF
2. 10"X16" WOOD OR MOLDED BRACKET
3. 10" ALUMINUM WRAPPED FASCIA
4. 6"X14" WOOD OR MOLDED BRACKET
5. CEMENT BOARD TRIM OR "SMART BOARD" TRIM
6. 16"X16" CAST STONE MEDALLION – CROSS CIRCLE MEDALLION BY PINEAPPLE GROVE.
7. BRICK SOLDIER COURSE
8. VINYL SINGLE–HUNG WINDOW
9. ALUMINUM STOREFRONT DOOR/WINDOW SYSTEM
10. CAST STONE HEADER
11. CAST STONE BAND
12. BRICK VENEER
13. TENANT SIGN
14. INTEGRATED STONE W/ CONTRASTING LETTERING
15. CAST STONE SILL
16. CAST STONE VENEER
17. POWDER COAT STEEL CANOPY W/ CABLE SUSPENSIONS
18. 8'–X3' CLOTH AWNING W/ STEEL FRAME
19. WALL SCONCE PER LIGHTING SCHEDULE
20. RAISED PLANTER BED
21. POWDER–COATED STEEL GUARD RAIL
22. CEMENT BOARD OR CAST STONE HEADER
23. PAINTED WOOD OR MOLDED CLOSED LOUVER
24. TYPE K ALUMINUM GUTTER
25. ALUMINUM DOWNSPOUT
26. VINYL PATIO DOOR
27. POSSIBLE ADDITIONAL SIGNAGE LOCATION
28. SMOOTH–FACE CMU VENEER
29. FIBER–CEMENT SIDING

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

FINAL DETAILED PLANS
04 / 30 / 2014

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:
KELLY JOHN GOOD REGISTERED No. 19600148 STATE OF IOWA ARCHITECT

PROJECT DATE:
04.30.14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
EXTERIOR ELEVATIONS

SHEET NUMBER:
A200

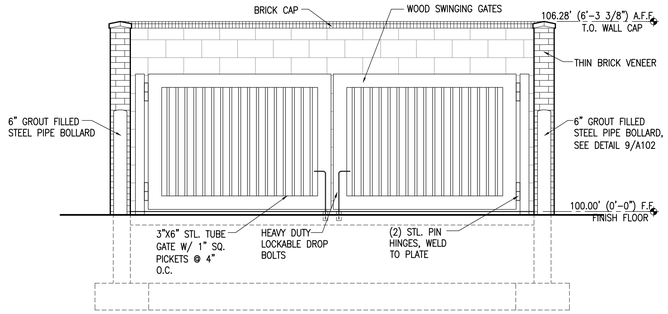

6 A201 TRASH ENCLOSURE FRONT ELEVATION
SCALE: 3/8" = 1'-0"

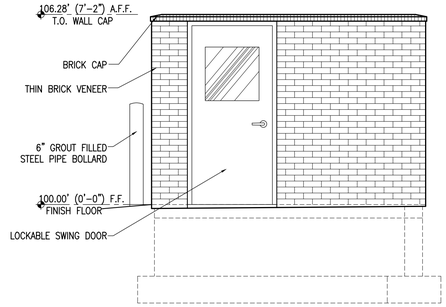

5 A201 TRASH ENCLOSURE SIDE ELEVATION
SCALE: 3/8" = 1'-0"

11 A201 METAL GATE W/ PVC PRIVACY SCREEN
SCALE: N.T.S.

8 A201 PROJECTING TENANT SIGN EXAMPLE
SCALE: N.T.S.

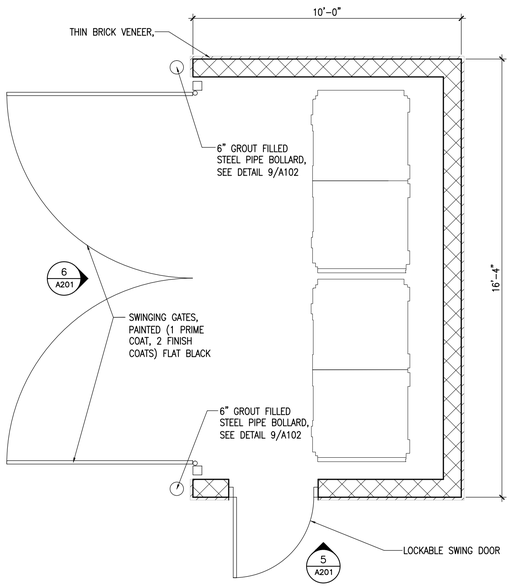

7 A201 TRASH ENCLOSURE PLAN
SCALE: 3/8"=1'-0"

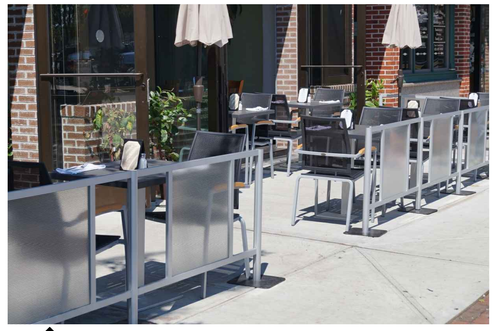

10 A201 OUTDOOR SEATING COMPONENT EXAMPLE
SCALE: N.T.S.

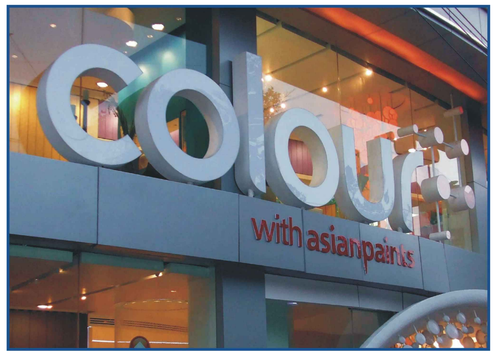

9 A201 ON-OVERHANG SIGNAGE EXAMPLE
SCALE: N.T.S.

3 A201 12"X18" PERMIT PARKING SIGN
SCALE: N.T.S.

4 A201 12"X18" ADA PARKING SIGN
SCALE: N.T.S.

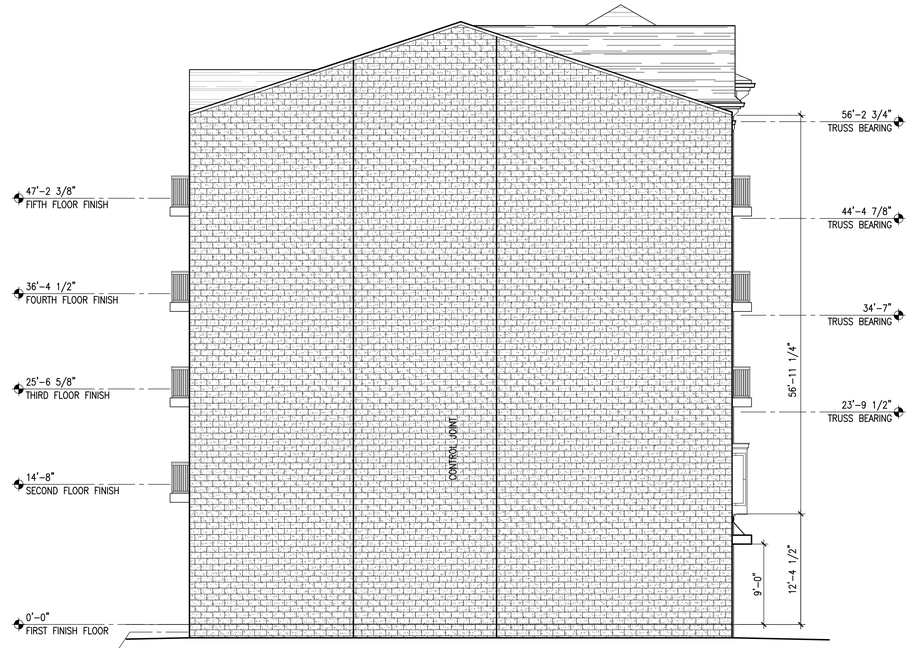

2 A201 SOUTH ELEVATION
SCALE: 1/8"=1'-0"

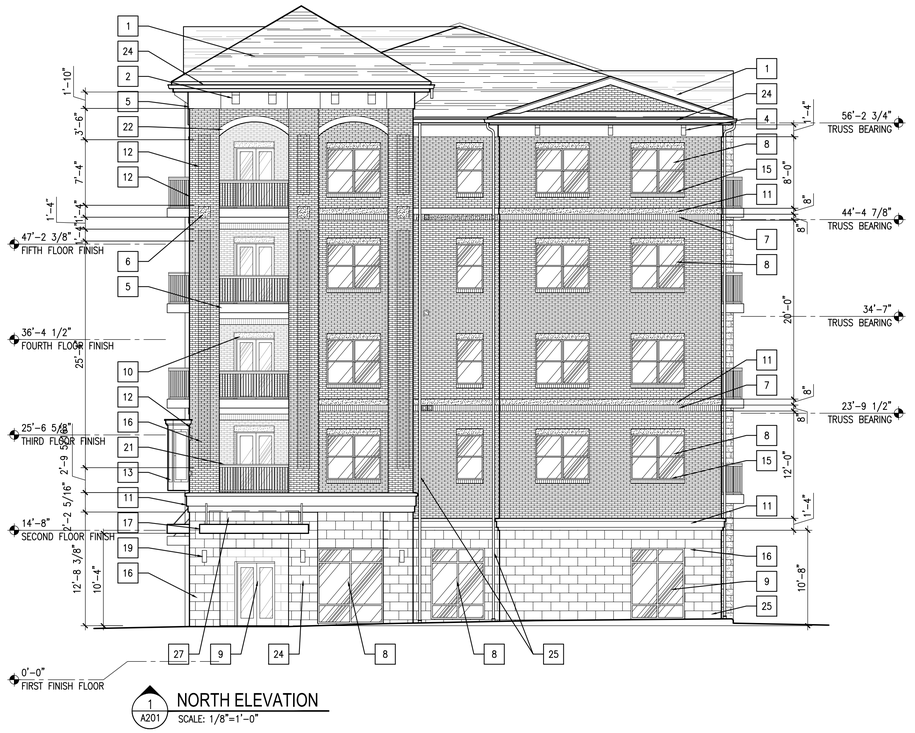

1 A201 NORTH ELEVATION
SCALE: 1/8"=1'-0"

ELEVATION KEYNOTES

1. ARCHITECTURAL SHINGLE ROOF
2. 10"X16" WOOD OR MOLDED BRACKET
3. 10" ALUMINUM WRAPPED FASCIA
4. 6"X14" WOOD OR MOLDED BRACKET
5. CEMENT BOARD TRIM OR "SMART BOARD" TRIM
6. 16"X16" CAST STONE MEDALLION – CROSS CIRCLE MEDALLION BY PINEAPPLE GROVE.
7. BRICK SOLDIER COURSE
8. VINYL SINGLE-HUNG WINDOW
9. ALUMINUM STOREFRONT DOOR/WINDOW SYSTEM
10. CAST STONE HEADER
11. CAST STONE BAND
12. BRICK VENEER
13. TENANT SIGN
14. INTEGRATED STONE W/ CONTRASTING LETTERING
15. CAST STONE SILL
16. CAST STONE VENEER
17. POWDER COAT STEEL CANOPY W/ CABLE SUSPENSIONS
18. 8'-X3' CLOTH AWNING W/ STEEL FRAME
19. WALL SCONCE PER LIGHTING SCHEDULE
20. RAISED PLANTER BED
21. POWDER-COATED STEEL GUARD RAIL
22. CEMENT BOARD OR CAST STONE HEADER
23. PAINTED WOOD OR MOLDED CLOSED LOUVER
24. TYPE K ALUMINUM GUTTER
25. ALUMINUM DOWNSPOUT
26. VINYL PATIO DOOR
27. POSSIBLE ADDITIONAL SIGNAGE LOCATION
28. SMOOTH-FACE CMU VENEER
29. FIBER-CEMENT SIDING

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

FINAL DETAILED PLANS
04 / 30 / 2014

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:
REGISTERED JOHN GOOD 19600148 STATE OF INDIANA ARCHITECT

PROJECT DATE:
04.30.14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
EXTERIOR ELEVATIONS

SHEET NUMBER:
A201

LIGHT FIXTURE SCHEDULE

SYMBOL	LABEL	DESCRIPTION
▭	F-1	(2) 13W QUAD TUBE 4-PIN FLUOURESCENT WALL-MOUNTED FIXTURE IN A BLACK FINISH WITH POLYCARBONATE MATTE WHITE DIFFUSER. OXYGEN LIGHTING 2-706-15 OR APPROVED EQUAL.
□	F-2	(1) 18 WATT TRIPLE TUBE COMPACT FLOURESCENT IN BLACK METAL FRAME HOUSING W/ OPAL GLASS DIFFUSER DOWNLIGHT, LBL LIGHTING PW-635-BL-CF1HE-W OR APPROVED EQUAL.
⌓	F-3	(1) 13 WATT QUAD TUBE COMPACT FLOURESCENT IN BLACK POLYCARBONATE ENCLOSURE FRAME HOUSING, LBL LIGHTING PW-6021-B-2131HE-W OR APPROVED EQUAL.
○	F-4	SURFACE-MOUNTED LED PARKING GARAGE AND CANOPY LUMINAIRE W/ ALUMINUM HOUSING W/ WAVESTREAM ACRYLIC DIFFUSER. MCGRAW-EDISON TOPTIER LED TT-A4-LED-E1-CQ OR APPROVED EQUAL.
▭	F-5	20' HIGH POLE-MOUNTED LED LUMINAIRE IN DIE-CAST ALUMINUM HOUSING AND HEAT SINK W/ 51 WATT LIGHT SQUARE. MCGRAW-EDISON GLEON GALLEON LED GLEON-AA-04-LED-E1-SL4 OR APPROVED EQUAL.
□	F-6	7-1/4" WALL-MOUNTED LED LUMINAIRE WALL FLOOD IN DIE-CAST ALUMINUM HOUSING AND HEAT SINK W/ 51 WATT LIGHT SQUARE. MASQUE II LED OR APPROVED EQUAL.

3 E100 FIFTH FLOOR LIGHTING PLAN
SCALE: 3/32"=1'-0"

2 E100 FLOORS 2-4 LIGHTING PLAN
SCALE: 3/32"=1'-0"

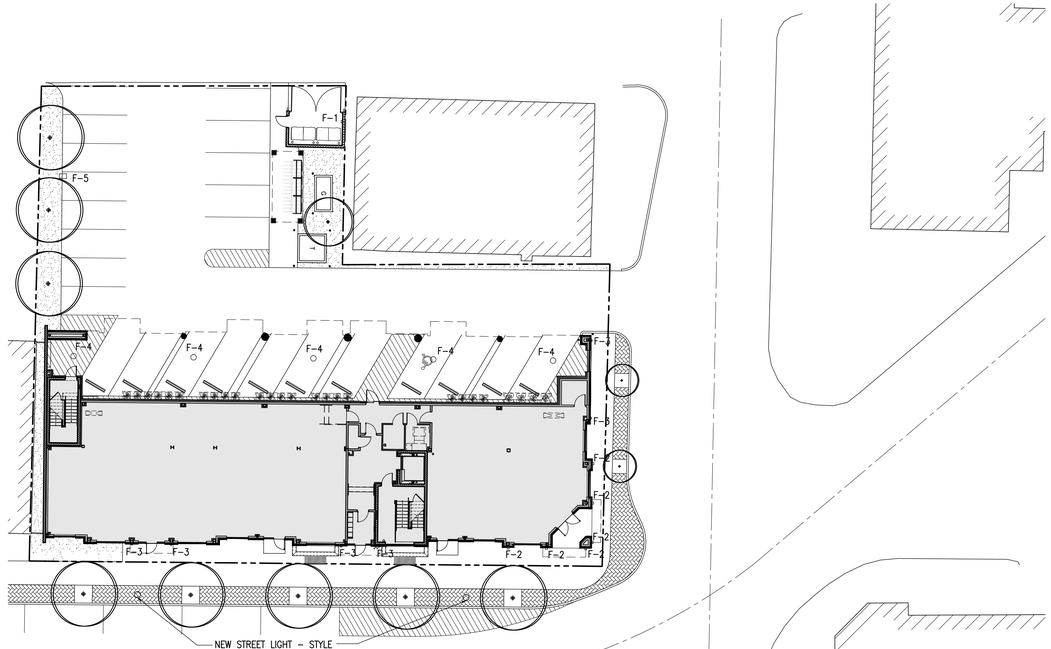

1 E100 SITE LIGHTING PLAN
SCALE: 1"=20'-0"

LIGHTING GENERAL NOTES

REFER TO THE NARRATIVE FOR THE SCHEDULE OF PROPOSED LIGHT FIXTURES.

1. THE PROPOSED LIGHT FIXTURES MAY BE SUBSTITUTED FOR A SIMILAR FIXTURE AT THE APPROVAL OF THE ADMINISTRATIVE OFFICER PROVIDED THE LIGHTING TYPE, LAMP WATTAGE, AND GENERAL STYLE OF FIXTURE IS THE SAME.
2. EMERGENCY LIGHTING AND EXIT SIGNAGE SHALL BE PROVIDED PER THE INDIANA BUILDING CODE ALTHOUGH NOT SHOWN ON THESE PLANNED DEVELOPMENT DRAWINGS.
3. SEE SHEET E101 FOR CUTSHEETS OF THE LIGHT FIXTURE APPEARANCE FOR THE KEYS LISTED ON THE LIGHTING PLAN.

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

FINAL DETAILED PLANS
04 / 30 / 2014

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:

JOHN GOOD REGISTERED No. 10600148 STATE OF INDIANA ARCHITECT

PROJECT DATE:
04.30.14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
ELECTRICAL LIGHTING PLAN

SHEET NUMBER:
E100

F-6

EXTERIOR ARCHITECTURAL LUMINAIRES FACADE LIGHTING

MASQUE™ II

CERAMIC METAL HALIDE / QUARTZ HALOGEN / LED



FASCIA OPTIONS (NOTE: FASCIAS W/ LEDs ARE NOT AVAILABLE)

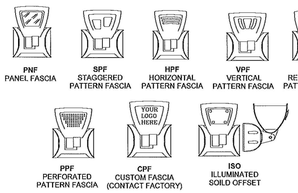

PNF PANEL FASCIA
SPF STAGGERED PATTERN FASCIA
HPF HORIZONTAL PATTERN FASCIA
VPF VERTICAL PATTERN FASCIA
RPF RECTANGULAR PATTERN FASCIA
PPF PERFORATED PATTERN FASCIA
CPF CUSTOM FASCIA (CONTACT FACTORY)
ISO ILLUMINATED SOLID OFFSET

SPECIFICATIONS

Housing: The optical housing is a heavy duty single piece die-casting of 360 low copper content aluminum.

Doorframe & Lenses: The doorframe is constructed from a heavy duty single piece die-casting of 360 low copper content aluminum. Flush captive stainless steel bolts fasten the doorframe to the housing.

A single piece molded silicone gasket seals the primary and any optional lenses between the doorframe and housing. The design of this unique gasket allows the Dichroic Lens option to be easily installed or changed in the field. The standard lens is 3/16" thick clear tempered glass and covers the optional Dichroic Lens when used.

Aiming Knuckle: The aiming knuckle attaches the optical housing to the ballast compartment and allows for a ± 90° vertical and a 350° rotational adjustment. The knuckle is a die-cast from 360 low copper content aluminum.

A flush stainless steel socket head bolt, die-cast teeth and silicone gaskets insure solid aiming positions are retained.

Ballast Enclosure: The ballast housing is a heavy duty single piece 360 low copper content aluminum die-casting, as is the base plate that completes the enclosure assembly. To aid with the installation and fixture service, the base plate is attached to the ballast enclosure by a stainless steel safety cable.

Electrical: All ballasts are integral to the fixture. All fixtures are operationally tested prior to shipment. Electronic ballasts are used for Ceramic Metal Halide fixtures. The electronic ballasts have an "A" sound rating and are HPF, with a THD of less than 10% and available in 120V and 277V. Consult factory for any special requirements. LED fixtures are 120 to 277V, with a 24 volt output.

Finish: Outdoor grade polyester powder paints with UV inhibitors are used to provide a textured finish with a minimum thickness of 3mil. A multi-stage phosphate pre-treatment wash is utilized in our automated in-house dry powder painting system. See the Insight standard pallet for color selection. Custom colors are available. Please consult the factory.

Labels: Masque II fixtures are UL/CUL approved for use in wet Locations, mounted in any position. 150W CMH fixtures are EISA compliant.

Insight Lighting reserves the right to change specifications without notice due to product improvements.

INSIGHT

Rio Rancho, NM 87144
TEL: 505.345.0688
www.insightlighting.com

12/10

McGRAW-EDISON®

energy solutions

DESCRIPTION

The TopTier™ Parking Garage and Canopy Luminaire is an innovative solution that delivers an unparalleled combination of performance and visual comfort. The patented WaveStream™ optical technology blocks the line of sight from the LED light sources to the observer, while extracting the maximum amount of light on task. This approach results in a high level of uniformity and vertical footcandles that enhances safety in the application environment. The TopTier luminaire is UL/cUL listed for wet locations, IP66 and 3G vibration rated.

Catalog #	TT-A4-LED-E1-CQ	Type F-4
Project	225 NORTHWESTERN	
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Construction
One-piece, low copper die-cast aluminum housing provides a clean and symmetric housing. Formed aluminum top is sloped to prevent bird nesting. Metal electrical tray allows for easy electrical access for field servicing.

Optics
Unique optical distributions are accomplished using various combinations of reflective backing plates and WaveStream optical technology. The optical Waveguide is manufactured using precision injection molded acrylic with MicroLens® optics. The MicroLens optics contain microscopic inclusions that form a repeatable and redundant pattern to direct light in a precisely prescribed distribution. For the ultimate level of glare control and visual comfort, specify the SQ option which adds a Solite® glass lens that works in combination with the Waveguide lens and reflective backing plate.

Offered standard in 4000K (+/- 275K) CCT, optional 3000K and 6000K. Minimum 70 CRI.

Electrical
LED driver(s) are mounted to metal electrical tray for optimal thermal performance. 120-277V 50/60Hz, 347V 60Hz or 480V 60Hz operation. For 0-10V dimming driver(s), specify the DIM option. Shipped standard with Cooper Lighting proprietary circuit module designed to withstand 10kV of transient line surge. Greater than 85% lumen maintenance expected at 60,000 hours, based off LM-80 test data and TM-21. Suitable for ambient temperature applications from -40°C (-40°F) to 40°C (104°F). For 50°C (122°F) applications, specify the HA high ambient option. IP66 rated against the ingress of dust and water.

Mounting
Standard fixture mounts to a square or octagonal 4" surface or recessed j-box via heavy-gauge quick mount bracket. With the addition of a field supplied wet location j-box, the luminaire can be pendant mounted to a rigid or free swinging pendant. Optional mounting methods include trunnion mount and wall mount.

Finish
Housing finished in white Super durable TGIC polyester powder coat paint, 2.5 mil nominal thickness for superior protection against fade and wear. Optional colors include black, bronze, grey, dark platinum and graphite metallic. RAL and custom color matches available. Consult the McGraw-Edison Architectural Colors brochure for the complete selection.

Warranty
Five-year limited warranty.

TT TOPTIER LED

Solid State LED

PARKING GARAGE AND CANOPY LUMINAIRE

DIMENSIONS

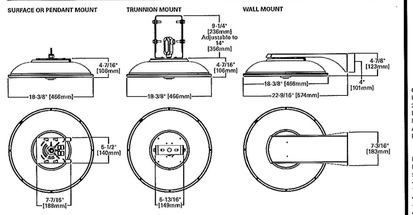

CERTIFICATION DATA
UL/cUL Wet Location Listed
3G Vibration Rated
LM79 / LM80 Compliant
IP66 Rated
ARRA Compliant
ISO 9001

ENERGY DATA
Electronic LED Driver
>0.9 Power Factor
<20% Total Harmonic Distortion
120-277V/60 & 60Hz, 347V/60Hz, 480V/60Hz
-40°C Min. Temprature
40°C Max. Temperature
50°C Max. Temperature (HA Option)

SHIPPING DATA
Approximate Net Weight:
16 lbs. (7.2 kgs.)

Cooper Lighting
by EATON

ADH130197
2013-10-04 13:43:09

outdoor

boardwalk small outdoor

DESCRIPTION
Sleek metal frame offers down light through an opal glass diffuser. Incandescent includes (1) E26 medium base 60 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-2 base 18 watt triple tube compact fluorescent lamp.120 or 277v.

WEIGHT
5lb / 2.27kg ±



wall projection 5.5" / 140 mm

ORDERING INFORMATION

type	model	finish	lamp	wet location
JW Incandescent PW Compact Fluorescent	635	BL black SI silver	2D E26 A19 60w 120v (JW only) CFTRE GX24Q-2 triple tube 18w 120v (PW only) CFQRE GX24Q-2 triple tube 18w 277v (PW only)	W wet location

FIXTURE TYPE: F-2
JOB NAME: 225 NORTHWESTERN
NOTES:

LBL
7400 Linder Avenue
Skokie, Illinois 60077
T 847.626.6300
F 847.626.6350
www.lbllighting.com

©2013 LBL Lighting. All Rights Reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

McGRAW-EDISON®

energy solutions

DESCRIPTION

The Galleon™ LED luminaire delivers exceptional performance in a highly scalable, low-profile design. Patented, high-efficiency AccuLED Optics™ system provides uniform and energy conscious illumination to walkways, parking lots, roadways, building areas and security lighting applications. IP66 rated and UL/cUL Listed for wet locations.

Catalog #	GLEON-AA-04-LED-B1-SL4	Type F-5
Project	225 NORTHWESTERN	
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Construction
Extruded aluminum driver enclosure thermally isolated from Light Squares for optimal thermal performance. Heavy-wall, die-cast aluminum end caps enclose housing and die-cast aluminum heat sinks. A unique, patent pending interlocking housing and heat sink provides scalability with superior structural rigidity. 3G vibration tested. Optional tool-less hardware available for ease of entry into electrical chamber. Housing is IP66 rated.

Optics
Choice of 12 patented, high-efficiency AccuLED Optics™ manufactured from injection molded acrylic. Optics are precisely designed to shape the distribution maximizing efficiency and application spacing. AccuLED Optics create consistent distributions with the scalability to meet customized application requirements. Offered standard in 4000K (+/- 275K) CCT and nominal 70 CRI. Optional 6000K CCT and 3000K CCT (80 CRI).

Electrical
LED drivers are mounted to removable tray assembly for ease of maintenance. 120-277V 50/60Hz, 347V 60Hz or 480V 60Hz operation. Shipped standard with Cooper Lighting proprietary circuit module designed to withstand 10kV of transient line surge. The Galleon LED luminaire is suitable for operation in -40°C to 40°C ambient environments. For applications with ambient temperatures exceeding 40°C, specify the HA (High Ambient) option. Light Squares are IP66 rated. 90% lumen maintenance expected at 60,000 hours.

Mounting
Extruded aluminum arm includes internal bolt guides allowing for easy positioning of fixture during assembly. Designed for pole or wall mounting. When mounting two or more luminaires at 90° or 120° apart, the EA extended arm may be required. Refer to the arm mounting requirement table on page 3. For wall mounting, specify wall mount bracket option. 3G vibration rated.

Finish
Housing finished in Super durable TGIC polyester powder coat paint, 2.5 mil nominal thickness for superior protection against fade and wear. Heat sink is powder coated black. Standard colors include black, bronze, grey, white, dark platinum and graphite metallic. RAL and custom color matches available. Consult the McGraw-Edison Architectural Colors brochure for the complete selection.

Warranty
Five-year warranty.



GLEON
GALLEON LED

1-10 Light Squares

Solid State LED

AREA/SITE LUMINAIRE

DIMENSIONS

POLE MOUNT



WALL MOUNT



DIMENSION DATA

Number of Light Squares	"A" Width	"B" Standard Arm Length	"B" Optional Arm Length [1]	Weight with Arm (lbs)	EPA with Arm [2] (Sq. Ft.)
1-4	15-1/2" [394mm]	7" [178mm]	10" [254mm]	33 [15.0 kgs.]	0.56
5-6	31-5/8" [644mm]	7" [178mm]	10" [254mm]	44 [20.0 kgs.]	1.00
7-8	27-5/8" [702mm]	7" [178mm]	13" [330mm]	54 [24.5 kgs.]	1.07
9-10	33-3/4" [857mm]	7" [178mm]	16" [406mm]	63 [28.6 kgs.]	1.12

NOTES: 1. Optional arm length to be used when mounting two fixtures at 90° on a single pole. 2. EPA calculated with optional arm length.

Cooper Lighting
by EATON

*www.designlights.org

CERTIFICATION DATA
UL/cUL Wet Location Listed
ISO 9001
LM79 / LM80 Compliant
3G Vibration Rated
ARRA Compliant
DesignLights Consortium® Qualified*
IP66 Rated

ENERGY DATA
Electronic LED Driver
>0.9 Power Factor
<20% Total Harmonic Distortion
120V-277V 60/60Hz
347V & 480V 60Hz
-40°C Min. Temperature
40°C Max. Temperature
50°C Max. Temperature (HA Option)

ADH120541
2013-10-01 09:53:38

outdoor

stingray saturn outdoor

DESCRIPTION
Outdoor version of Saturn fixture includes die-cast aluminum trim ring, clear polycarbonate enclosure, and waterproof rubber gasket. Available in black, bronze, silver and white finish. Incandescent accepts (2) 40 watt or equivalent E26 medium base T10 lamps (not included); Fluorescent 13w Quad includes (2) 13 watt G24Q-1 base quad tube compact fluorescent lamps and electronic ballast; Fluorescent 18w Quad includes (2) 18 watt G24Q-2 base quad tube compact fluorescent lamps and electronic ballast; Fluorescent 26w Quad includes (2) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballast..

wall projection 3.9" / 99 mm

ORDERING INFORMATION

type	model	finish	lamp	wet location
JW Incandescent PW Compact Fluorescent	6021	B black BZ bronze S silver W white	213HE G24Q-1 Quad Tube 2x13w 120v (PW only) 213HE G24Q-1 Quad Tube 2x13w 277v (PW only) 218HE G24Q-2 Quad Tube 2x18w 120v (PW only) 218HE G24Q-2 Quad Tube 2x18w 277v (PW only) 226HE G24Q-3 Quad Tube 2x26w 120v (PW only) 226HE G24Q-3 Quad Tube 2x26w 277v (PW only) 26D E26 T10 2x40w 120v (JW only)	W wet location

FIXTURE TYPE: F-3
JOB NAME: 225 NORTHWESTERN
NOTES:

LBL
7400 Linder Avenue
Skokie, Illinois 60077
T 847.626.6300
F 847.626.6350
www.lbllighting.com

©2013 LBL Lighting. All Rights Reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

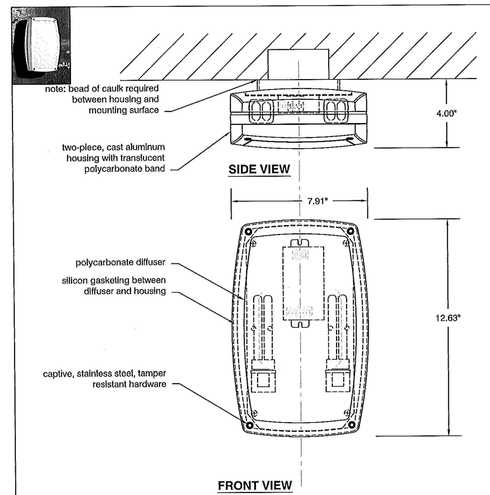

OXYGEN LIGHTING ©

DEVA outdoor
oxygen **2-706-xx**

LAMPING
- o 2 x 13W quad tube 4-pin fluorescent (G24q-2)

BALLAST
- o electronic, HPF programmed start (-30°C minimum starting temperature)

DIFFUSER
- o injection molded matte white polycarbonate

METAL FINISHES
- o **6** - white
- o **15** - black
- o **16** - grey
- o all finishes: polyester powdercoat

DIMENSIONS
- o 7.91"(w) x 12.63"(h) 4.00" (ext)

VOLTAGE
- o 120V to 277V

Sample Catalog Number

Series #	Finish	Catalog number
2-706 -	15 =	2-706-15

INSTALLATION
- o 4" octagonal "J"- Box
- o UL approved for wet locations, (Installer must provide a bead of caulk between fixture housing and mounting surface)
- o wall or ceiling mount

oxygen

OXYGEN LIGHTING SUITE 900
580 BROADWAY, NEW YORK, NY 10012
TEL. (877) 607-0202 FAX (877) 607-0203

PROJECT: 225 NORTHWESTERN
DATE: F-1

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

FINAL DETAILED PLANS
04 / 30 / 2014

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:



PROJECT DATE:
04.30.14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY:

DRAWING TITLE:
LIGHTING CUTSHEETS

SHEET NUMBER:
E101

CITY OF

WEST LAFAYETTE, INDIANA

TYPICAL CONSTRUCTION GUIDELINES AND DETAILS

EFFECTIVE FOR ALL PUBLIC WORK ON OR AFTER JANUARY 1, 2010

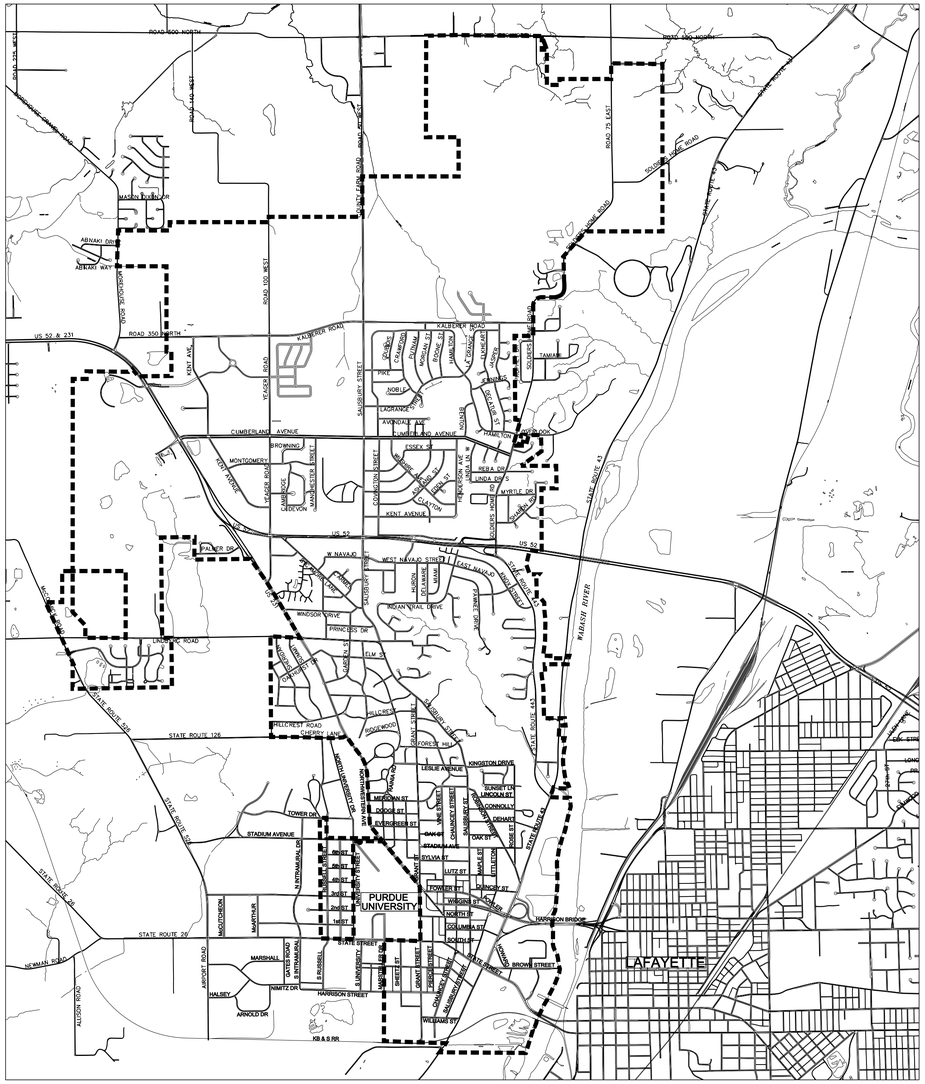

Not To Scale

City Officials

John R. Dennis	*Mayor*
Judith C. Rhodes	*City Clerk-Treasurer*
Eric H. Burns	*City Attorney*
David M. Buck, P.E.	*City Engineer*

Board Of Public Works And Safety

John R. Dennis	*President*
Sana Booker	*Member*
Brad Marley	*Member*

City Council

Ann Hunt	*President,*	*District 3*
Jon Hoggatt		*District 1*
Peter Bunder		*District 2*
Vicki Burch		*District 4*
Gerry Keen		*District 5*
Gerald Thomas		*At-Large*
Steve Dietrich		*At-Large*

DRAWING INDEX

	DRAWING NAME
1	*Title and Index*
2	*General Notes and Guidelines for Utility Locations*
3	*Pavement and Curb Details*
4	*Concrete Pavement, Traffic Control and Sign Details*
5	*Pavement Repair and Restoration Details*
6	*Sidewalk and Handicap Ramp Details*
7	*Drive Approach and Sidewalk Details*
8	*Single Lane Roundabout Details*
9	*Miscellaneous Roundabout Details*
10	*Two-Lane Roundabout Details*
11	*Sanitary Sewer Details*
12	*Sanitary Sewer and Misc. Utility Details*
13	*Storm Sewer Details*
14	*Miscellaneous Details*
15	*Storm Sewer Structures, Drainage, and Erosion Control Details*
16	*Erosion Control Details*
17-18	*Landscaping Standard Details and Specifications*

DAVID M. BUCK REGISTERED No. 10001191 STATE OF INDIANA PROFESSIONAL ENGINEER

CITY OF WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Typical Construction Guidelines And Details

RECOMMENDED FOR APPROVAL — CITY ENGINEER — 01/01/10 DATE

Date: Jan. 2010 | Sheet 1 of 18

Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R501

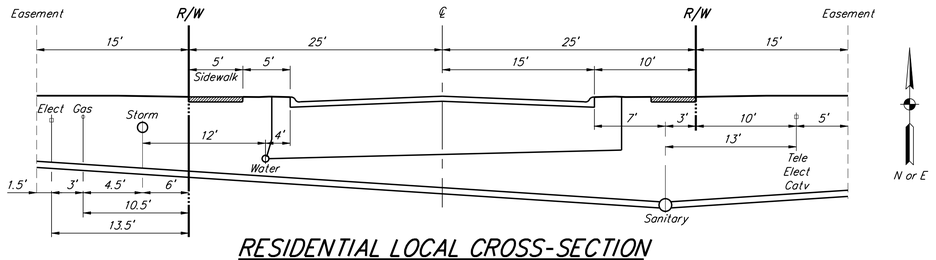

RESIDENTIAL LOCAL CROSS-SECTION

Not To Scale

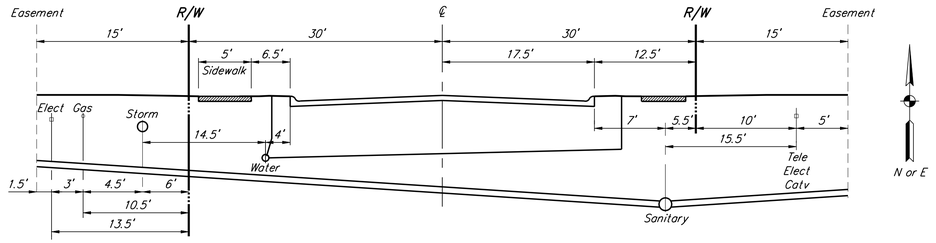

NON-RESIDENTIAL LOCAL CROSS-SECTION

Not To Scale

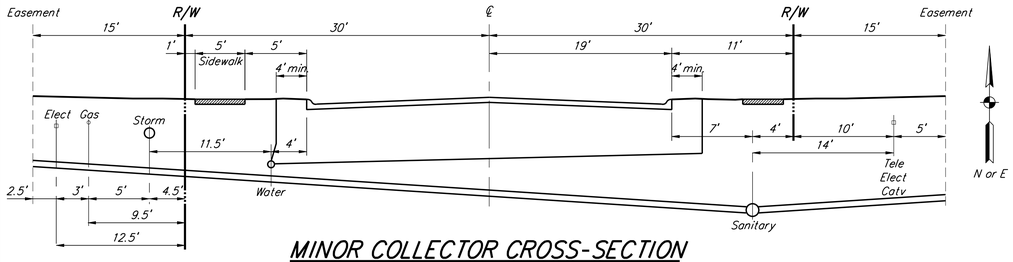

MINOR COLLECTOR CROSS-SECTION

Not To Scale

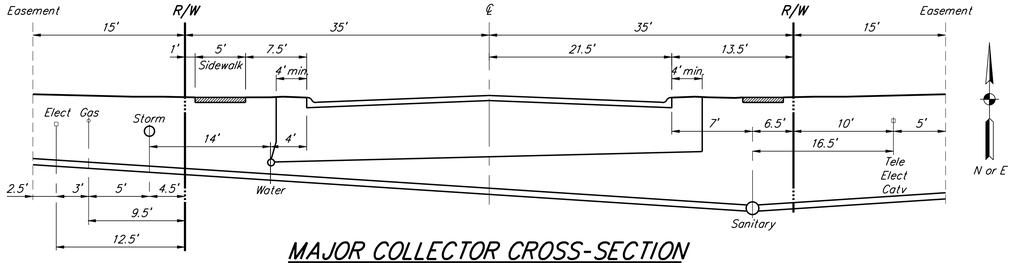

MAJOR COLLECTOR CROSS-SECTION

Not To Scale

Notes:

Use North and East for directional control.

Guidelines for utility locations within the road right-of-way and/or utility easements.

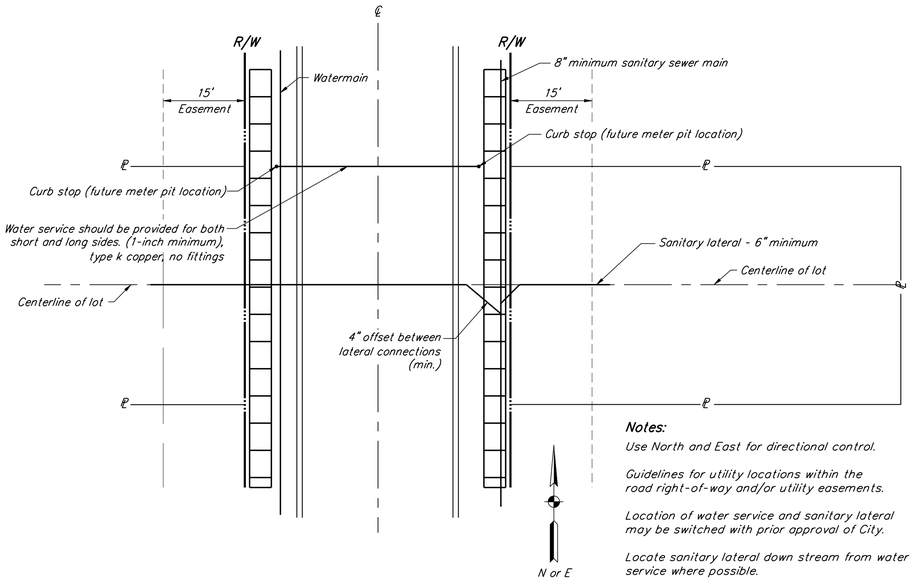

Notes:

Use North and East for directional control.

Guidelines for utility locations within the road right-of-way and/or utility easements.

Location of water service and sanitary lateral may be switched with prior approval of City.

Locate sanitary lateral down stream from water service where possible.

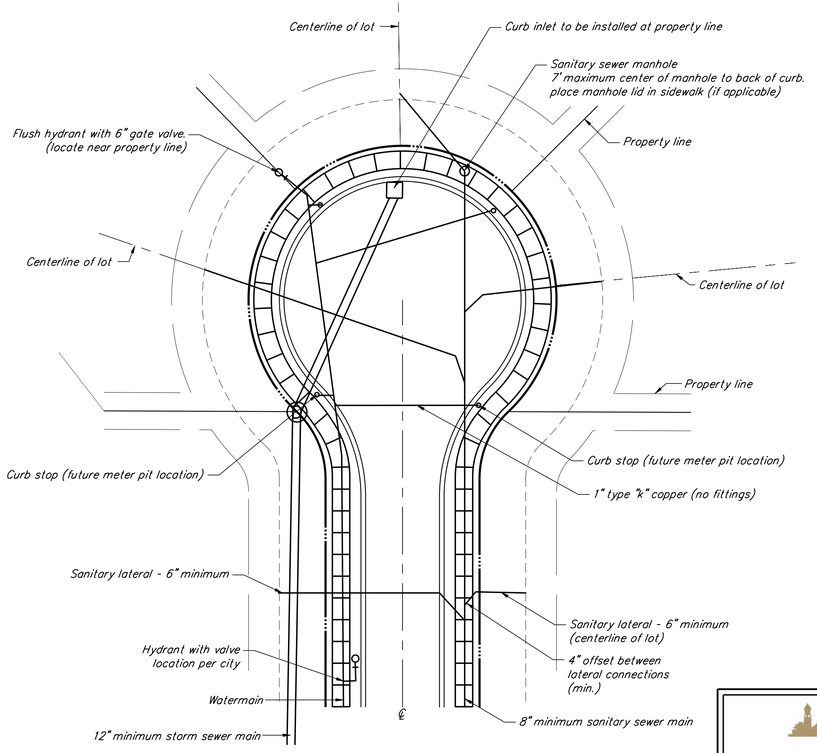

UTILITY LOCATIONS

Not To Scale

Notes:

Use North and East for directional control.

Guidelines for utility locations within the road right-of-way and/or utility easements.

General Notes:

1. Contractor shall verify the exact location of all underground utilities at least 24 hours prior to any construction or excavation. During construction, all utilities shall be adequately supported to minimize damage.
2. All permits and easements will be obtained by the owner with any required insurance or bonds to be provided by the contractor prior to the start of work on the project.
3. All vertical control shall be on American Vertical Datum (NAVD 1988). Horizontal control shall be on nad state plane coordinates (NAD83).
4. Wherever proprietary equipment is specified, "or approved equal" is implied. All proposals for substitution shall be submitted to the City in writing for approval prior to use.
5. All areas disturbed by the construction process shall be fertilized and seeded. Adequate mulching shall be placed after seeding and fertilizing. It shall be the contractor's responsibility to see that adequate growth is established. Sodding will be required as shown on the plans.
6. Trenches under paved areas (excluding sidewalks) shall be backfilled with granular material per INDOT "Standard Specifications", 1999 Edition, Section 211, and compacted in lifts. Granular material to extend five feet beyond the limits of the paved area with a 1:1 slope to the bottom of the trench. Flowable mortar per section 213 of INDOT "Standard Specifications", 1999 edition, may be used in lieu of granular material with prior approval of the City Engineer's office
7. Installation of, or provisions for, the installation of all underground utilities, including service laterals, to be placed under the pavements shall be established prior to the construction of the pavements.
8. Contractor shall contact the City if any damage to city utilities Occurs. Damage to City's sewers by contractors will be repaired by City's sewer dept. with all costs of repair to be paid by the contractor unless otherwise directed by the City. Other damaged utilities shall be repaired in accordance with the affected utility's repair policy.
9. 1'-6" vertical separation and 10'-0" horizontal separation is to be maintained between watermains, hydrants and sewers (storm and sanitary).
10. The contractor is responsible for maintaining a safe construction site and for keeping surrounding streets neat and clean. The contractor will provide all traffic control required on public ways near the project.
11. The construction work shall conform to the requirements of all agencies having jurisdiction over the project.
12. The contractor will notify the appropriate governmental agencies at least 48 hours prior to starting or resuming work on a project.
13. The contractor will provide safe access to the construction site for all inspectors and will provide material samples for testing.
14. Information required for preparing "as-built" drawings must be recorded prior to the backfilling of any underground facility.
15. Top of manhole frames to be set at proposed yard or sidewalk grade when located in front yard area of lot or right-of-way.
16. All sign, markings and other traffic control devices shall comply with INDOT standards and the Indiana MUTCD.
17. For utility placement for other than single family residences, contact City Engineer's office for requirements.
18. Sidewalk width shall be 5' minimum for new construction, and match existing width for spot reconstruction. For reconstruction of long distances of sidewalk, a 5' minimum width is required unless prohibited by right-of-way constraints.
19. Sidewalk placement shall be referenced from the right-of-way.
20. Requests for any alteration or deviation from the policies outlined in the City of West Lafayette typical construction guidleines and details will be considered on a case by case basis. The construction guidelines and details should be considered a guideline and extreme conditions or situations may warrant an exemption. Submit requests in writing to the city engineer. The City Engineer will review the request and make a determination if an exemption is approved or disapproved.

DAVID M. BLICK
REGISTERED
No. 10001191
STATE OF INDIANA
PROFESSIONAL ENGINEER

CITY OF
WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

General Notes And Guidelines For Utility Locations

RECOMMENDED FOR APPROVAL — CITY ENGINEER — DATE 01/01/10

Date: Jan. 2010 | **Sheet** 2 of 18

Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R502

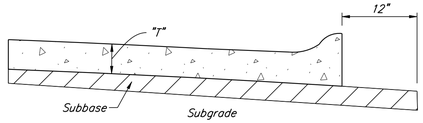

CONCRETE RIGID PAVEMENT SECTION

Not To Scale

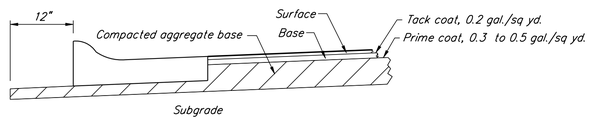

ASPHALT PAVEMENT SECTION

Not To Scale

Notes:

Base to be constructed prior to construction of curb and gutter

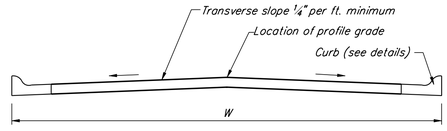

STANDARD STREET CROSS-SECTION

Not To Scale

Class Of Street (1)	Curb (2)	Subgrade Thickness	Concrete Pavement (4)		Asphalt Pavement (3)			
			"t" (Pvt. Thickness)	Transverse Joint Spacing	9.5 mm HMA Surface	19.0 mm HMA Interm.	25.0 mm HMA Base	#53 (C.A.B.)
Primary arterial	Type III	*	8"	--	1.5"	2.5"	8" (2-4" lifts)	6"
Secondary arterial	Type III	*	8"	--	1.5"	2.5"	8" (2-4" lifts)	6"
Collector	Type I (minor) Type III (major)	6"	6"	14'	1.5"	--	4.5"	12" (2-6" lifts)
Local	Type I (residential) Type II (non-residential)	6"	6"	14'	1.5"	--	4.5"	12" (2-6" lifts)

* To be determined by City

Item	Material Type	INDOT Specifications Section
Subgrade	Earth	207
Subbase		302
Curb	Combined curb and gutter	605.04-A,B,C,F,G,H,I
Base (aggregate)	Compacted aggregate	303
Base (asphalt)	Asphaltic concrete	401,402,403 (5d) (5)
Intermediate	Asphaltic concrete	401,402,403
Surface	Asphaltic concrete	401,402,403
Prime coat	MC-70, AE-P	408
Tack coat	AE-T	409
Pavement (concrete)	Non-reinforced concrete	501
Sidewalks, ramps, etc.	Portland cement concrete	604
Joint sealant	Sealant	906

Notes:

(1) As defined by the Subdivision Ordinance Of Tippecanoe County.

(2) See sheet 11 for curb inlet details. Perimeter drain shall extend 50 ft. either direction from the curb inlet.

(3) Under certain circumstances, 8" lime treated subbase may be substituted for 6" of #53 aggregate base under asphalt. lime treatment can be used only in areas of new construction, and only and with the City Engineer's approval.

(4) Subbase for concrete pavements should be determined according to a geotechnical investigation and pavement design calculations (to be approved by the City Engineering department). in the absence of a geotechnical investigation and pavement design, the subbase shall be 3" of #8s or #43s crushed for drainage and 4" of #53s for separation.

(5) Pavement sections where underdrains are required shall be as approved by the City Engineer.

(6) Alternate pavement designs may be submitted for approval by the City Engineer.

TYPICAL PAVEMENT SECTIONS AND NOTES

Not To Scale

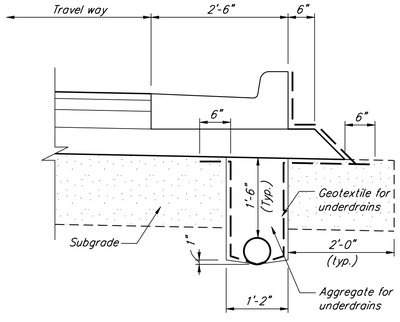

TYPICAL UNDERDRAIN DETAIL

Not To Scale

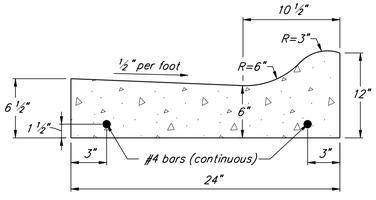

Combined Concrete Curb And Gutter
Type II

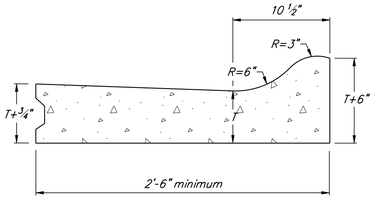

Integral Concrete Curb
Type II

CURB SECTIONS

Not To Scale

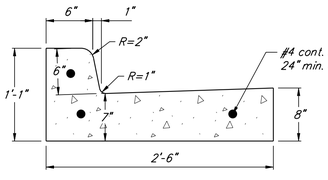

Type III

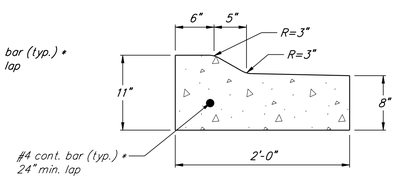

Type IV

COMBINED CONCRETE CURB AND GUTTER

Not To Scale

* Upon Engineer's approval, fiber reinforced concrete may be used when curb is placed by machine.

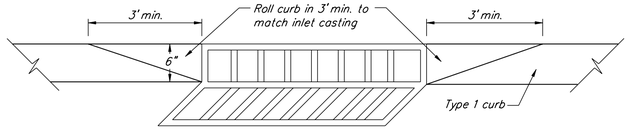

CURB TRANSITION DETAIL

Not To Scale

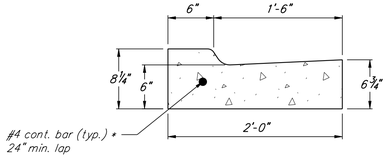

DEPRESSED CONCRETE CURB AND GUTTER

Not To Scale

Pavement Construction Notes:

1. Installation of or provisions for the installation of all underground utilities, including service laterals, to be placed under pavement shall be established prior to the construction of the pavement.
2. All pavement, curbs, sidewalks, ramps, etc. shall be constructed in accordance with the specifications and in close conformance with the lines, grades, thicknesses and typical cross sections shown on the plans. materials and workmanship shall be in accordance with designated sections of the INDOT "standard specifications", latest edition.
3. Subbase and subgrade fill material shall be compacted to a minimum 95% of the maximum dry density in accordance with ASTM D698.
4. Wherever rigid pavement is to be used the contractor shall submit a detailed paving plan to the City Engineer. the paving plan shall show the location and type of jointing to be used in the construction. The location and type of jointing shall be in accordance with the City standards and guidelines.
5. Whenever subgrade stabilization is to be used the contractor shall submit a written plan detailing the application method. The plan must comply with the State of Indiana environmental regulations and standards and be approved by the City Engineer.
6. Recycled concrete may be used as #53 agg. base on a case by case basis upon prior written approval of the City.
7. Wherever proprietary equipment is specified, "or approved equal" is implied. All proposals for substitution shall be submitted to the City in writing for approval prior to use.

Quality Control Requirements:

1. All testing shall be in accordance with the latest INDOT standard specifications. where practicable, all tests shall be witnessed by the City. Contractor shall coordinate testing schedule with the City Engineer's office. All test results shall be submitted to the City Engineer's office within 48 hours of the completion of each test and prior to placing any material on the subbase/subgrade. The frequency of testing where shown is a minimum. Additional testing may be required at the direction of the City Engineer.
2. The developer/contractor shall retain an independent testing firm (unless otherwise noted) to perform the following testing:

   A. Subgrade:
      1. Compaction (fill sections): 1 test per lift per 500 lf of single lane width
      2. Adequacy of subgrades shall be determined solely by the engineering department. A proofroll shall be performed on all street subgrade prior to placing stone and installing curb. Subgrade shall meet INDOT specification section 207, except that only the top 6" of subgrade shall be tested for 100% standard compaction. Proofrolling that complies with INDOT specification section 203.26 is also required, except that proofrolling may also be accomplished using a fully loaded tandum dump truck (g.v.w. - 48,000#) in lieu of a rubber tired roller. Tire marks less than 1/2" are acceptable. If the subgrade does not pass these specifications, then subgrade treatments, including chemical modification performed according to INDOT specifications 207 and 215, may be done in lieu of the above density and proofroll specifications.

   B. Aggregate subbase:
      1. Gradation - 1 test per 1,000 tons or 1 per week
      2. Compaction - 1 test per 500 lf of single lane width

   C. Bituminous material (base, intermediate and surface):
      1. Asphalt extraction - 1 test per each type of material used per job. test to include gradation, asphalt content, crushed particle determination and deleterious determination. Test shall be certified per INDOT certification requirements.
      2. Density - the target density shall be determined from a test strip constructed per INDOT specifications. The target density shall not be less than 96% of the unit weight at the optimum binder content as determined by the mix design. The density of each sublot will be the average of five tests. A sublot shall be 1,000 lf of single lane width. Breakdown roller shall be minimum 10 ton or approved vibratory.

   d. Concrete for sidewalk, curbing and driveways:
      1. Air and slump - 1 test per day for pours over 20 cys or minimum 1 per week.
      2. Compressive strength tests - 1 set of 4 test cylinders per every 100 cys or minimum of 1 set per week.
      3. Concrete strength shall be a minimum 4,000 psi before open to traffic.

   e. Concrete for pavement - frequency of tests shall be in accordance with the INDOT frequency testing manual as set out in the section titled "concrete pavement and structure material".

DAVID M. BUCK REGISTERED No. 10001191 STATE OF INDIANA PROFESSIONAL ENGINEER

CITY OF WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Pavement And Curb Details

RECOMMENDED FOR APPROVAL _____ CITY ENGINEER 01/01/10 DATE

Date: Jan. 2010 | Sheet 3 of 18

Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R503

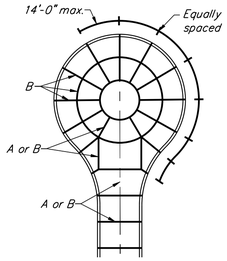

Cul-De-Sac Open Center

See joint details below for joint type

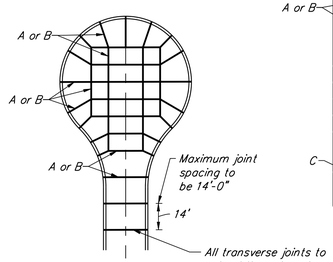

Cul-De-Sac Fully Paved

See pavement detail sheets for specific street geometry

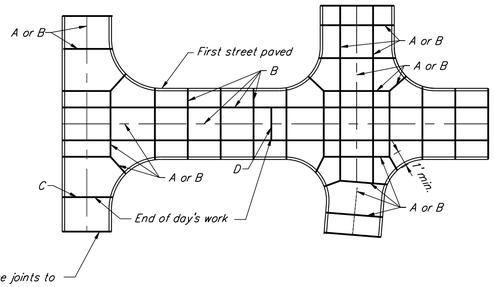

CONCRETE JOINT LAYOUT

Not To Scale

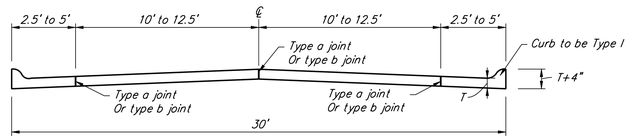

Local - Residential

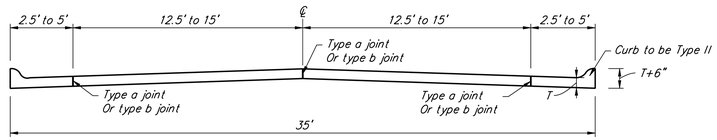

Local - Non-Residential

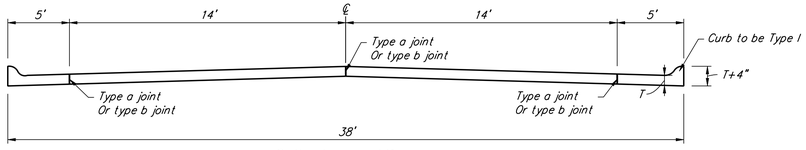

Collector - Minor

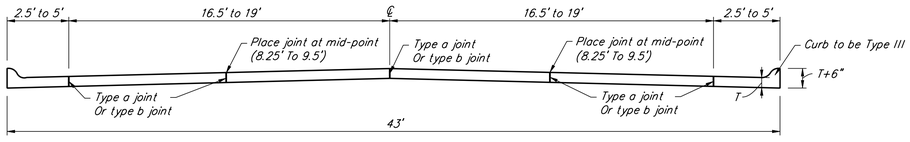

Collector - Major

RIGID PAVEMENT STREET CROSS SECTIONS

Not To Scale

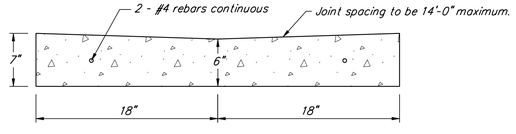

CONCRETE GUTTER PAN-STREET OR MAJOR DRIVE APPROACH

Not To Scale

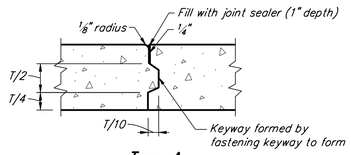

Type A

Longitudinal construction joint

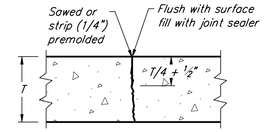

Type B

Longitudinal or transverse sawed or premolded strip, contraction joint

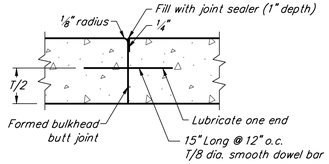

Type C

Transverse construction joint

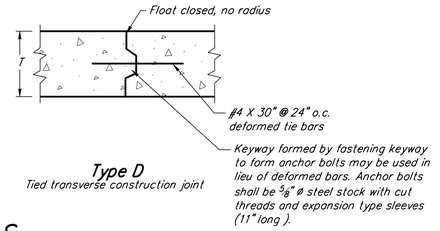

Type D

Tied transverse construction joint

JOINT DETAILS

Not To Scale

Note:

Joint sealing compound to be sealtight hi-spec (W.R. Meadows, Inc.) hot-applied, single component, polymeric joint sealing compound (ASTM D 3405), or approved equal.

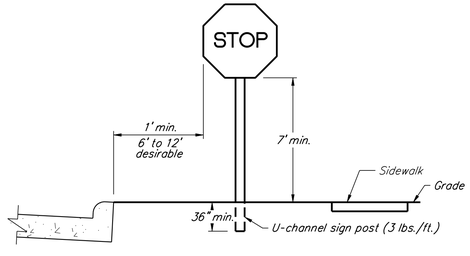

SIGN PLACEMENT

Not To Scale

Traffic Control And Sign Notes:

1. The contractor/developer shall provide and install all street name and road signs per current INDOT standards and City of West Lafayette guidelines and details. All traffic control devices shall comply with the current Indiana MUTCD. Final sign locations shall be staked and approved by the City, prior to installation.
2. Materials shall be free of burrs, pits and blemishes and shall present a smooth, clean surface.
3. Sign blanks shall meet INDOT specificotions unless otherwise specified.
4. All street name signs shall have green background with white letters/numbers on extruded aluminum blades.
5. Street name text shall be highway series c or d: engineer grade 9" blades with 6" letters/numbers on all streets, except at roundabouts, which shall be engineer grade 8" blades with 4" letters/numbers.
6. Stop signs (R1-1) shall be (30"x30") high intensity.
7. Sign bolts to be per INDOT specificotions. Bolts are to be theft proof.
8. Speed limit signs shall be 24"x30" high intensity or engineer grade.
9. Sign post shall be driven into the ground. No excavation shall be done to place signs.
10. Sreet name signs to be located at all streets.

DAVID M. BLOCK REGISTERED No. 10001191 STATE OF INDIANA PROFESSIONAL ENGINEER

CITY OF WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Concrete Pavement, Traffic Control, And Sign Details

RECOMMENDED FOR APPROVAL — CITY ENGINEER — 01/01/10 DATE

Date: Jan. 2010	Sheet 4 of 18
Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R504

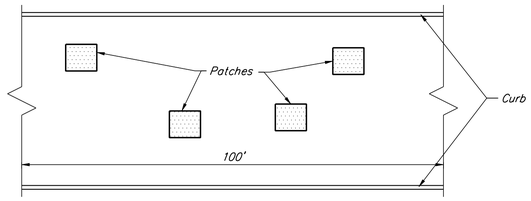

Multiple cuts shall be defined as any city street or alley, asphalt or concrete that have the following conditions:

1. Four (4) or more patches per 100 lineal feet of roadway by an individual utility per project, and
2. Area cut is greater than 64 sf in 100 lineal feet of roadway by an individual utility per project.

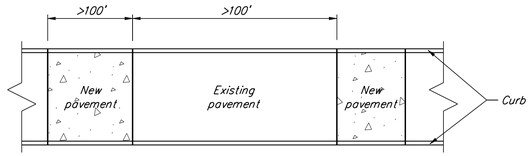

Multiple cuts to be restored as follows:

New pavement areas shall not have gaps of less than 100 feet.
Minimum length of new pavement shall be 100 feet.

METHOD FOR REPLACING MULTIPLE OR LARGE CUTS

Not To Scale

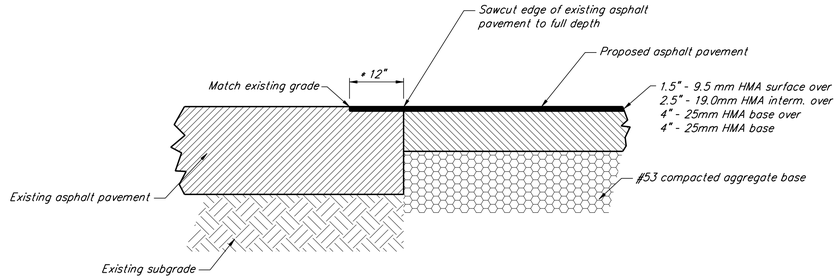

* Mill surface 1" deep for 12" from sawcut edge. Tack coat all exposed surfaces, and overlay with 1.5" of asphaltic surface. Continuous with proposed pavement surface.

LAP JOINT DETAIL

Not To Scale

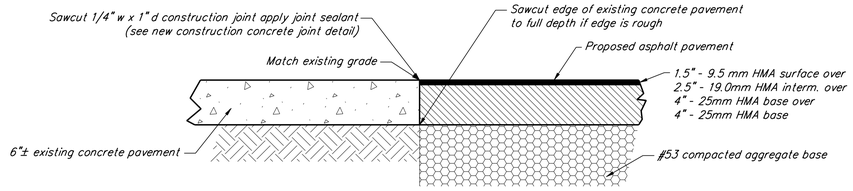

BUTT JOINT DETAIL

Not To Scale

Pavement Restoration Notes:

Permanent pavement restoration:

1. Permanent restoration shall commence immediately upon completion of utility work and be complete within 10 working days unless the City Engineer's office grants a longer period. Request for extension shall be in written form and accompanied with a repair schedule. Inventory of existing temporary restorations, and statement indicating the reason(s) for the extension.
2. Existing pavement saw cuts shall be in straight lines and are perpendicular to the curb (where possible). Edges of broken pavement shall be squared off to provide neat edge for paving.
3. Asphalt shall be placed using professional means to establish a hard, smooth, even graded surface. Compaction shall be done thoroughly and uniformly by a machine roller. Areas too small for machine rolling shall be compacted by hand with mechanical compaction equipment upon prior approval of the City. All courses shall be initially rolled with the roller traveling parallel to the centerline of the pavement beginning at each edge and working toward the center. All rolling and tamping operations shall be completed prior to asphalt cooling to below 180°F.
4. Prior to tack coating subbase and edges, the existing surface shall be free of irregularities to provide a reasonably smooth and uniform surface to receive treatment. The edges of existing pavement shall be cleaned to permit adhesion. Tack coat shall not be applied to wet surfaces or when the air temperature is below 45°F. Tack coat may be rolled, brushed or mopped. All excess tack coat shall be squeegeed from the surface.
5. All pavement restoration materials to be per INDOT "standard specifications", most recent edition.

Temporary pavement repair:

1. Existing pavement initial saw cut to be 5" minimum depth to obtain straight lines perpendicular from the curb edge and neat edge for paving. Edges of broken pavement shall be squared off and trimmed to neat straight lines.
2. Temporary pavement material is to be 6 ½" thick hot mix asphalt, asphalt cold patch, bag asphalt and crushed stone are unacceptable for use. The use of steel street plates must be requested in written form and accompanied with a repair schedule, inventory of existing temporary restorations, and statement indicating the reason(s) for use of plates.
3. During winter season when the permanent patch cannot be completed within 10 working days (November 1 thru April 14), if hot mix asphalt is not available, use INDOT approved "high performance cold patch" or equal INDOT approved material.

Hgh performance cold patch mixture #1 (upm), is for use in wet and cold conditions and workable at temperatures as low as -15°F.

High performance cold patch mixture #2 (cm300), is for use in wet and cold conditions and workable at temperatures as low as 32°F.

4. All materials are to be compacted to form a firm and smooth transition between old and new surface grade. Do not apply hot mix asphalt on a wet surface.
5. Upon completion of backfilling, temporary pavement on streets shall be placed by the end of the work day.
6. Temporary street restoration is intended to be an interim measure until conditions allow for permanent restoration of the street. The City realizes that at times, temporary restoration is necessary, such as, during the winter season when the asphalt plants are closed and when freezing temperatures make permanent restoration not feasible or when permit work precedes City street reconstruction or rehabilitation permit holders are to minimize the use of temporary restorations when possible. Any work undertaken before the fall asphalt plant closings must be permanently restored prior to the asphalt plant closings. Only work undertaken on or after December 1 (given that the asphalt plants have closed) may be carried over to permanent restoration in the following spring season. All temporary restoration placed during the winter season must be permanently restored within four (4) weeks of spring asphalt plant openings, but no later than may 15th. The City Engineer's office may grant extensions beyond May 15th for permanent restorations when requested in writing and accompanied with a repair schedule, Inventory of existing temporary restorations, and a statement indicating the reason(s) for the extension. All temporary restoration must be maintained by the permit holder until permanent restoration has been made.

Special surface streets:

1. Any special surfaces shall be restored in-kind. For example: brick surface streets require all pavement cuts to be restored with brick. Cobblestone surface streets must be restored with cobblestone. Permit holder shall salvage as much of the existing brick or cobblestone as possible for reuse in the restoration and shall supply any remaining material required for the restoration.

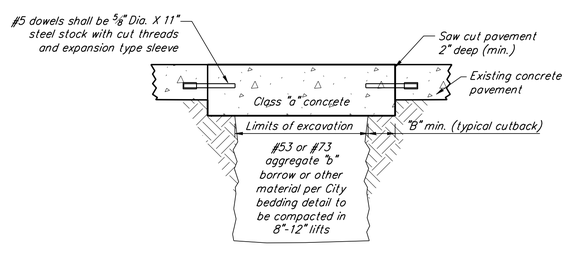

Concrete Pavement Repair

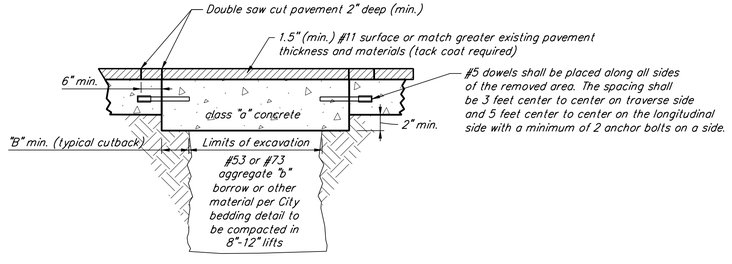

Asphalt Over Concrete Or Alternative Asphalt Pavement Repair

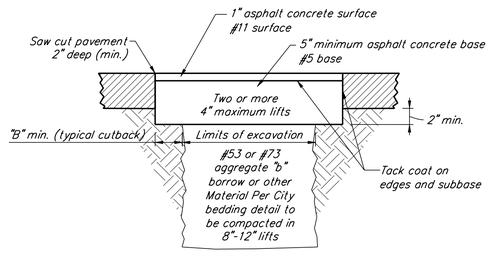

Asphalt Pavement Repair

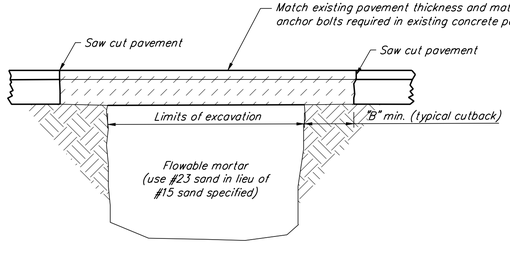

Pavement Repair With Flowable Mortar Backfill

(Flowable mortar shall not be used when temperatures are below 40° F)
** Use of flowable mortar requires prior approval from the City Engineer's office

Cutback Table	
Cut- Back "B"	Trench Width
6"	3'-0" or less
9"	3'-1" to 5'-0"
12"	5'-1" or greater

PERMANENT PAVEMENT RESTORATION

Not To Scale

Notes:

All pavement restoration materials to be per INDOT "Standard Specifications" most recent edition.

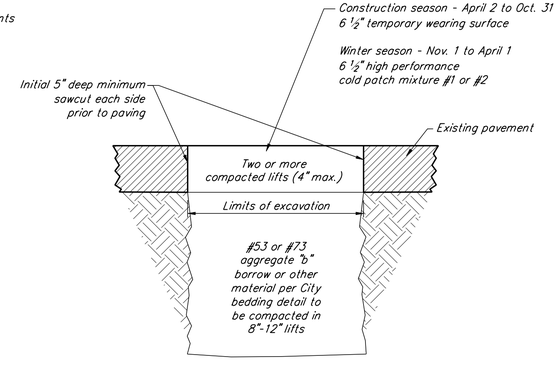

TEMPORARY ASPHALT REPAIR

Not To Scale

DAVID M. BUCK
REGISTERED
No. 10001191
STATE OF INDIANA
PROFESSIONAL ENGINEER

CITY OF WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Pavement Repair And Restoration Details

RECOMMENDED FOR APPROVAL — CITY ENGINEER — DATE 01/01/10

Date: Jan. 2010	Sheet 5 of 18
Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R505

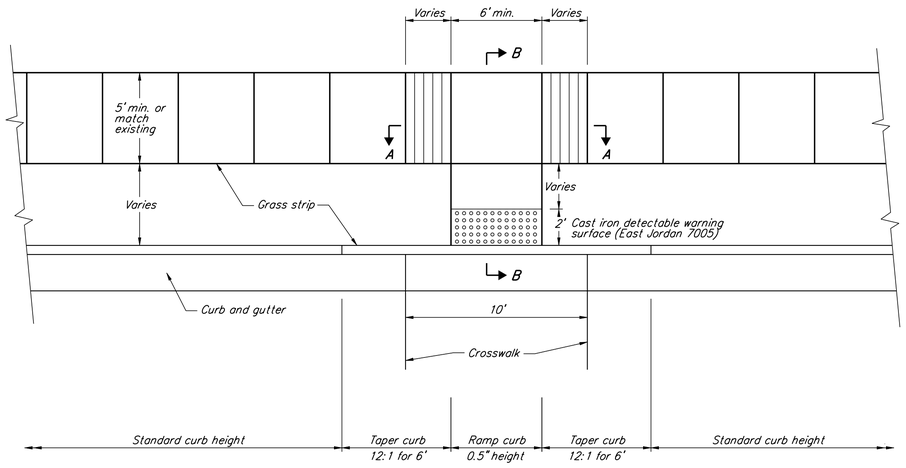

Access Ramp Type WLD Details

PLAN
Not To Scale

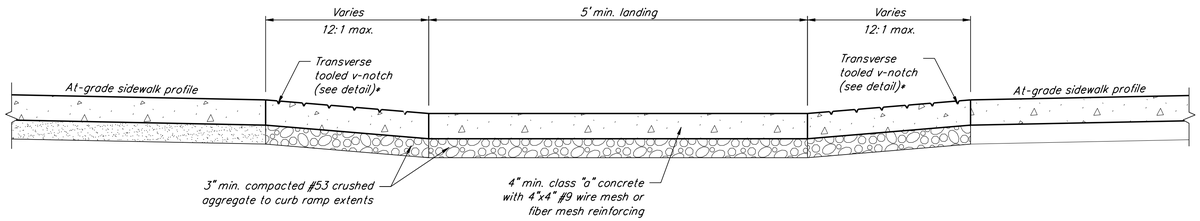

SECTION A-A
Not To Scale

* V-notch required for slopes steeper than 12:1 within a ramp. Approval required from City Engineering Department to omit notches.

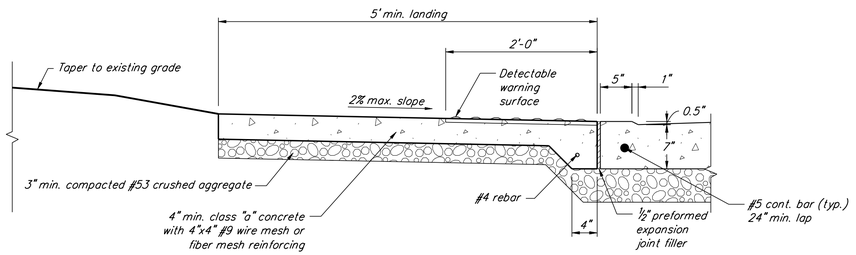

SECTION B-B
Not To Scale

ACCESS RAMP DETAILS AT PUBLIC STREET CROSSINGS
Not To Scale

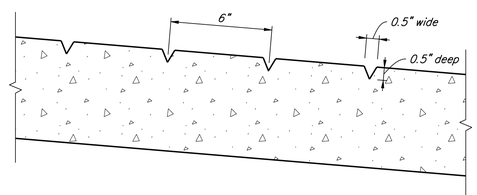

TOOLED V-NOTCH
Not To Scale

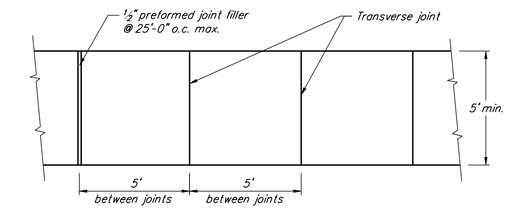

Plan View

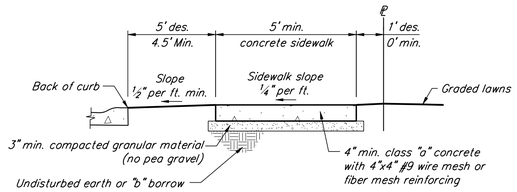

Section View

SIDEWALK DETAIL
Not To Scale

Construction Notes:

1. All curb ramp construction and finish shall comply with ADA requirements.
2. Installation of or provisions for the installation of all underground utilities, including service laterals, to be placed under pavement shall be established prior to the construction of the pavement.
3. All pavement, curbs, sidewalks, ramps, etc. Shall be constructed in accordance with the specifications and in close conformance with the lines, grades, thicknesses and typical cross sections shown on the plans. Materials and workmanship shall be in accordance with designated sections of the INDOT "standard specifications", latest edition.
4. Subbase and subgrade fill material shall be compacted to a minimum 95% of the maximum dry density in accordance with ASTM D698.
5. Recycled concrete may be used as #53 agg. base on a case by case basis upon prior written approval of the City.
6. Wherever proprietary equipment is specified, "or approved equal" is implied. All proposals for substitution shall be submitted to the City in writing for approval prior to use.
7. Weather limitations:
   By definition (ACI 306) cold weather conditions exist when for more than three (3) consecutive days, The average daily temperature is less than 40 degrees fahrenheit and the air temperature is not greater than 50 degrees fahrenheit for more than one-half of any 24-hour period.

   Concrete shall not be placed on frozen subgrade or subbase. Concrete shall be placed when the ambient temperature is 35 degrees fahrenheit and rising, Unless approval from the Engineering Department has been obtained to allow otherwise.

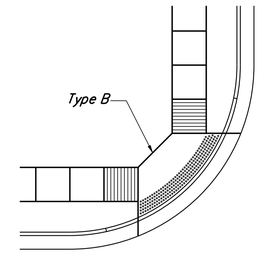

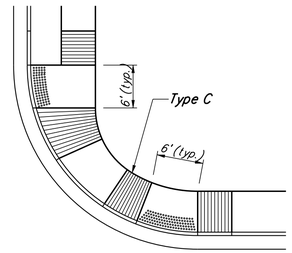

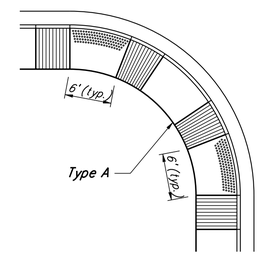

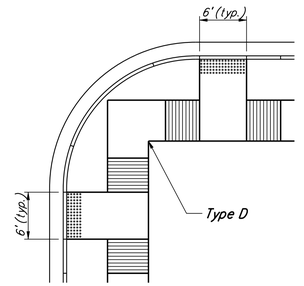

TYPICAL LOCATION PLAN
Not To Scale

* For existing locations, plans must be approved on a case-by-case basis by the West Lafayette Engineering Department to ensure conformity to ADA standards.

DAVID M. BUCK REGISTERED No. 10001191 STATE OF INDIANA PROFESSIONAL ENGINEER

CITY OF WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Sidewalk And Handicap Ramp Details

RECOMMENDED FOR APPROVAL — CITY ENGINEER — 01/01/10 DATE

Date:	Jan. 2010	Sheet	6 of 18

Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R506

Exit Radius (R1)

Residential: As approved by Engineering Department
Commercial: 15' min.

Enter Radius (R2)

Residential: As approved by Engineering Department
Commercial: 10' min. adjacent to parking
20' min. adjacent to travel lane

Drive Width (W)

Existing residential: Match existing, 10' min.
New residential: 10' min./24' max.

Existing commercial: match existing, 16' min.
New commercial: 20' min./40' max.

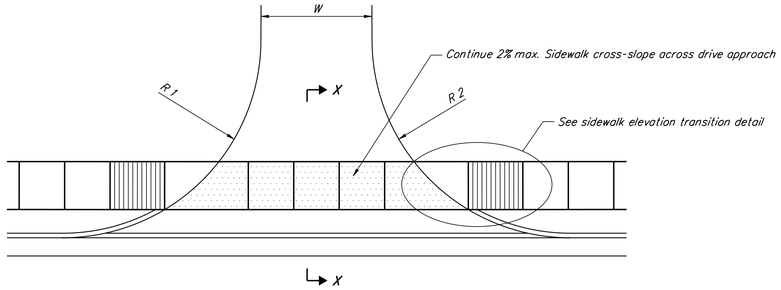

Plan View w/ Radii

Note:

Continue positive drainage across drive approach and ensure that ponding will not occur.

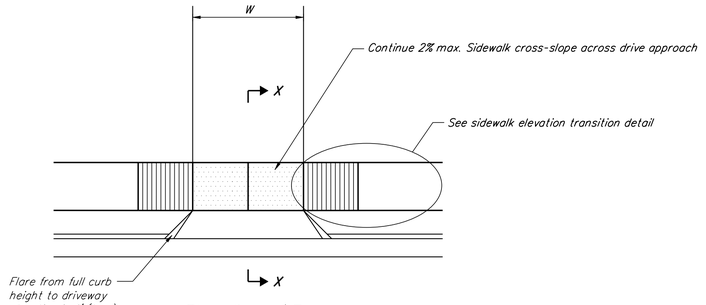

Plan View w/ Taper

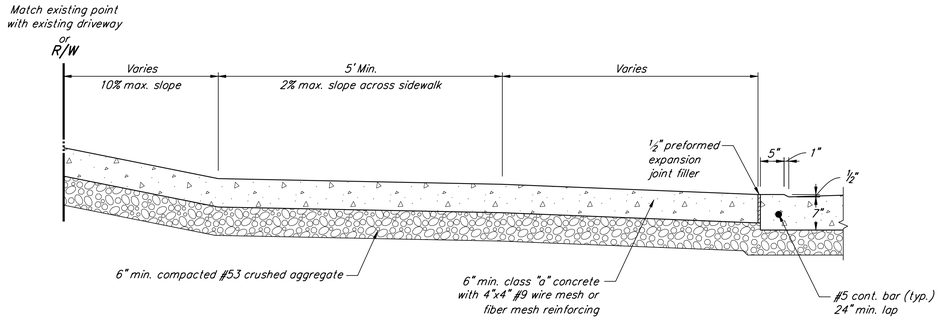

Section X-X

* Slopes steeper than 10% must be approved by the Engineering Department.

MINIMUM APPROACH SECTION FOR PRIVATE DRIVES (WITHIN CITY RIGHT OF WAY)

Not To Scale

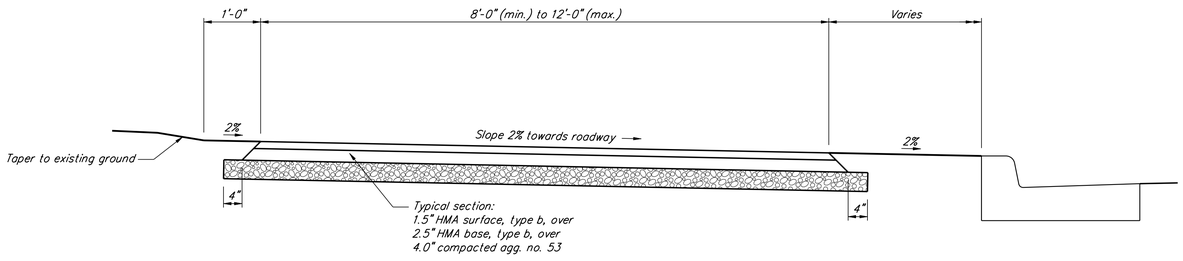

MULTI-USE PATH CROSS SECTION DETAIL

Not To Scale

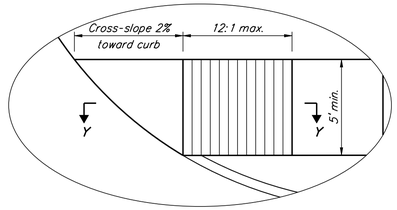

Plan View

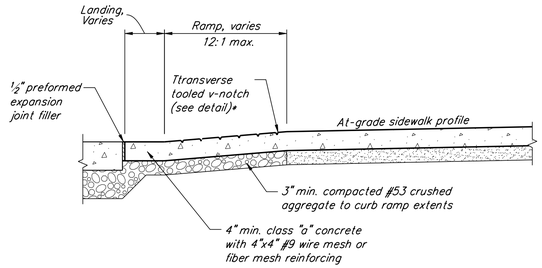

Section Y-Y

* May not be required for slopes flatter than 12:1. Approval required from City Engineering Department to omit notches.

SIDEWALK ELEVATION TRANSITION DETAIL

Not To Scale

Construction Notes:

1. All sidewalk ramp grades at drives shall comply with ADA requirements.
2. Installation of or provisions for the installation of all underground utilities, including service laterals, to be placed under pavement shall be established prior to the construction of the pavement.
3. All pavement, curbs, sidewalks, ramps, etc. shall be constructed in accordance with the specifications and in close conformance with the lines, grades, thicknesses and typical cross sections shown on the plans. Materials and workmanship shall be in accordance with designated sections of the INDOT "standard specifications", latest edition.
4. Subbase and subgrade fill material shall be compacted to a minimum 95% of the maximum dry density in accordance with ATSM D698.
5. Recycled concrete may be used as #53 agg. base on a case by case basis upon prior written approval of the City.
6. Wherever proprietary equipment is specified, "or approved equal" is implied. All proposals for substitution shall be submitted to the City in writing for approval prior to use.

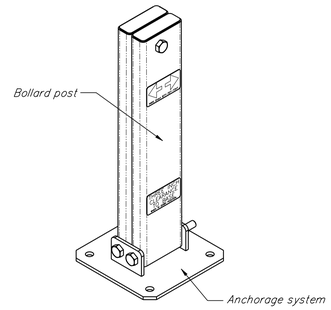

Up Position

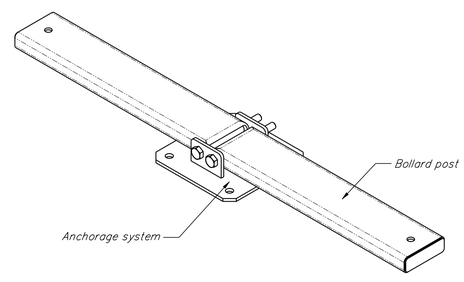

Down Position

DOUBLE POST HINGED BOLLARD

Traffic Guard Double Post Screw Lock Type DHB-SL
Not To Scale

DAVID M. BUCK REGISTERED No. 10001191 STATE OF INDIANA PROFESSIONAL ENGINEER

CITY OF WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Drive Approach And Sidewalk Details

RECOMMENDED FOR APPROVAL _____ 01/01/10
CITY ENGINEER DATE

Date: Jan. 2010	Sheet 7 of 18
Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R507

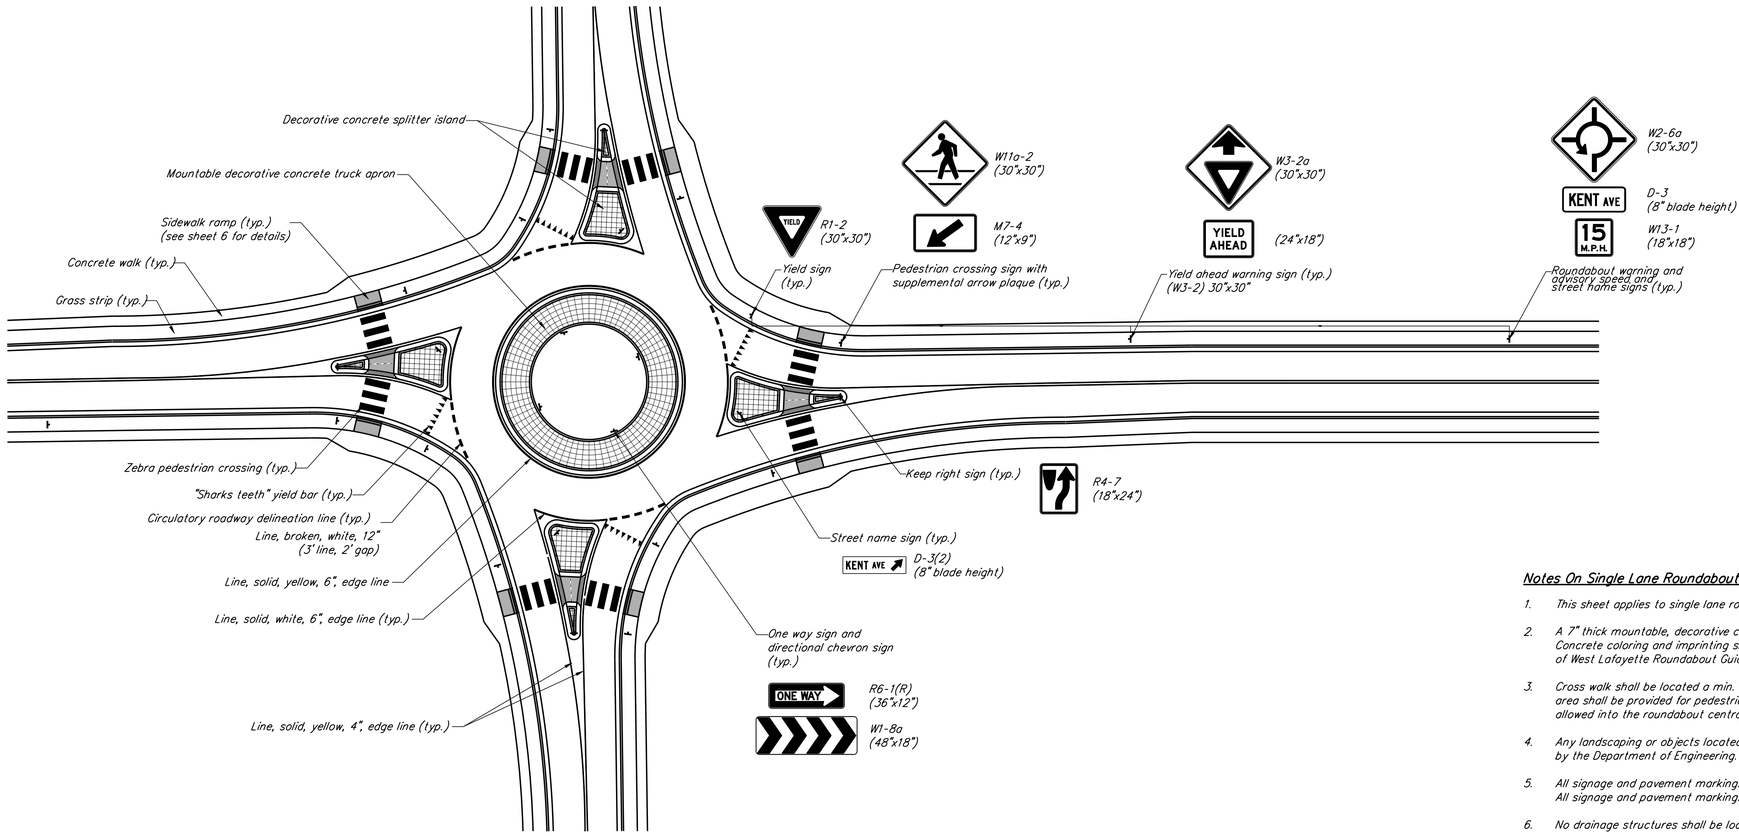

SINGLE LANE ROUNDABOUT

Not to Scale

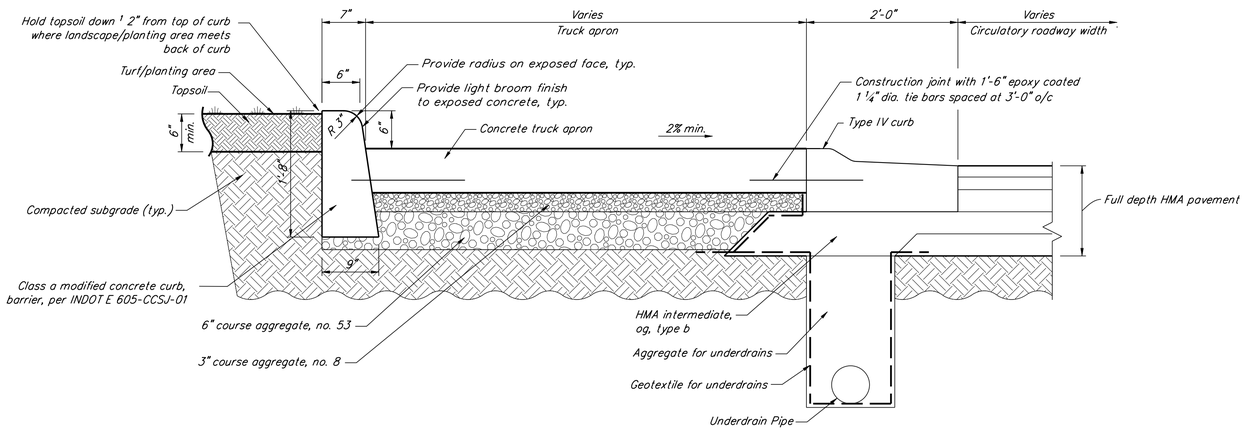

TRUCK APRON SECTION

Not to Scale

Notes On Single Lane Roundabout:

1. This sheet applies to single lane roundabouts.
2. A 7" thick mountable, decorative concrete truck apron shall be provided, if necessary. Concrete coloring and imprinting shall be per the specifications provided in the City of West Lafayette Roundabout Guidelines.
3. Cross walk shall be located a min. of 25 feet from the inscribed circle. A min. 6' wide refuge area shall be provided for pedestrians in the splitter island. No pedestrian crossings shall be allowed into the roundabout central island.
4. Any landscaping or objects located in the middle of the central island shall be approved by the Department of Engineering.
5. All signage and pavement markings shown shall be used as minimums. All signage and pavement markings are subject to approval by the Department of Engineering.
6. No drainage structures shall be located within circumference of inscribed circle.
7. All pavement markings shall be thermoplastic if pavement material is asphalt or preformed plastic if pavement material is concrete.
8. Snowplowable raised pavement markers (RPM) shall be placed prior to pedestrian crossings, On front point of curb island. There shall be a minimum of five (5) RPM's.
9. All signs shall be high intensity, high reflectivity and in accordance with the most recent Indiana Manual on Uniform Traffic Control Devices. See this sheet for sign codes and sizes.
10. All other appropriate City of West Lafayette standards apply.
11. All roundabout designs must be approved by the Department of Engineering.

DAVID M. BUCK
REGISTERED
No. 10001191
STATE OF INDIANA
PROFESSIONAL ENGINEER

CITY OF
WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Single Lane Roundabout Details

RECOMMENDED FOR APPROVAL — CITY ENGINEER — 01/01/10 DATE

Date:	Jan. 2010	Sheet	8 of 18

Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R508

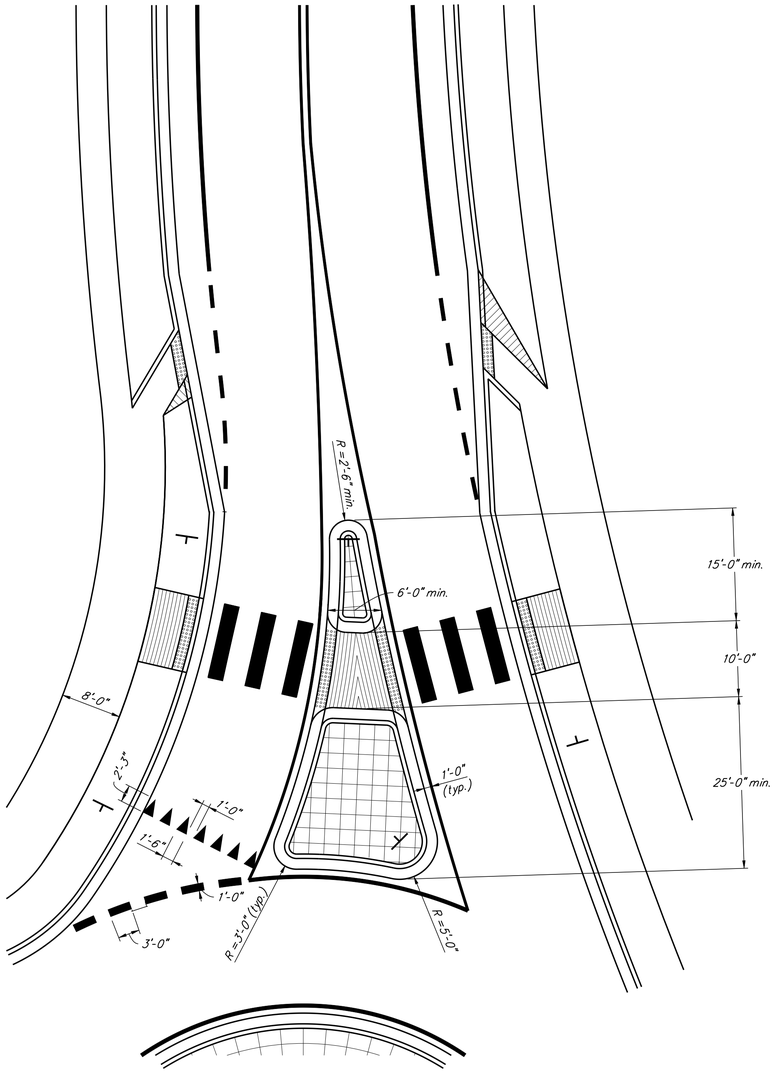

SPLITTER ISLAND DETAILS

Not to Scale

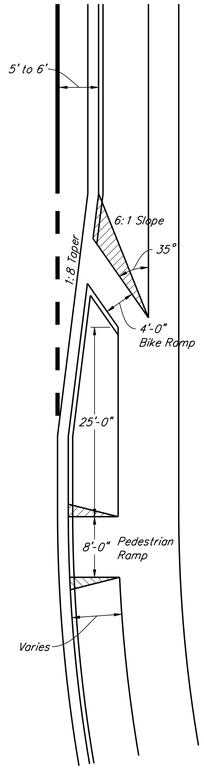

BICYCLE PATH AND RAMP DETAILS

NOT TO SCALE

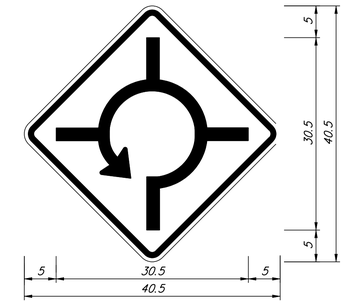

W2-6a_30x30;
30.0" across sides 2.3" radius, 0.9" border, 0.6" indent,
black on yellow; roundabout

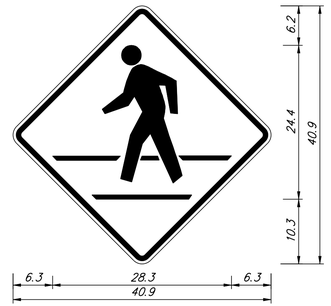

30.0" across sides 1.9" radius, 0.8" border, 0.5" indent, black on yellow;
W11a-2 std;

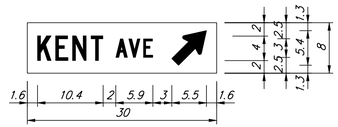

D-3(2); no border, white on green;
KENT c; AVE c;
standard arrow custom 7.0" x 4.0" 45°

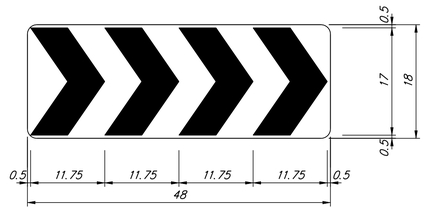

W1-8a mod.; 1.50" radius, 0.00" border, black on yellow

D-3(2); no border, white on green;
CUMBERLAND c; AVE c;
standard arrow custom 7.0" x 4.0" 45°

SIGN DETAILS

Not to Scale

DAVID M. BUCK
REGISTERED
No. 10001191
STATE OF INDIANA
PROFESSIONAL ENGINEER

CITY OF
WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Miscellaneous Roundabout Details

RECOMMENDED FOR APPROVAL — CITY ENGINEER — 01/01/10 DATE

Date:	Jan. 2010	Sheet	9 of 18

Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R509

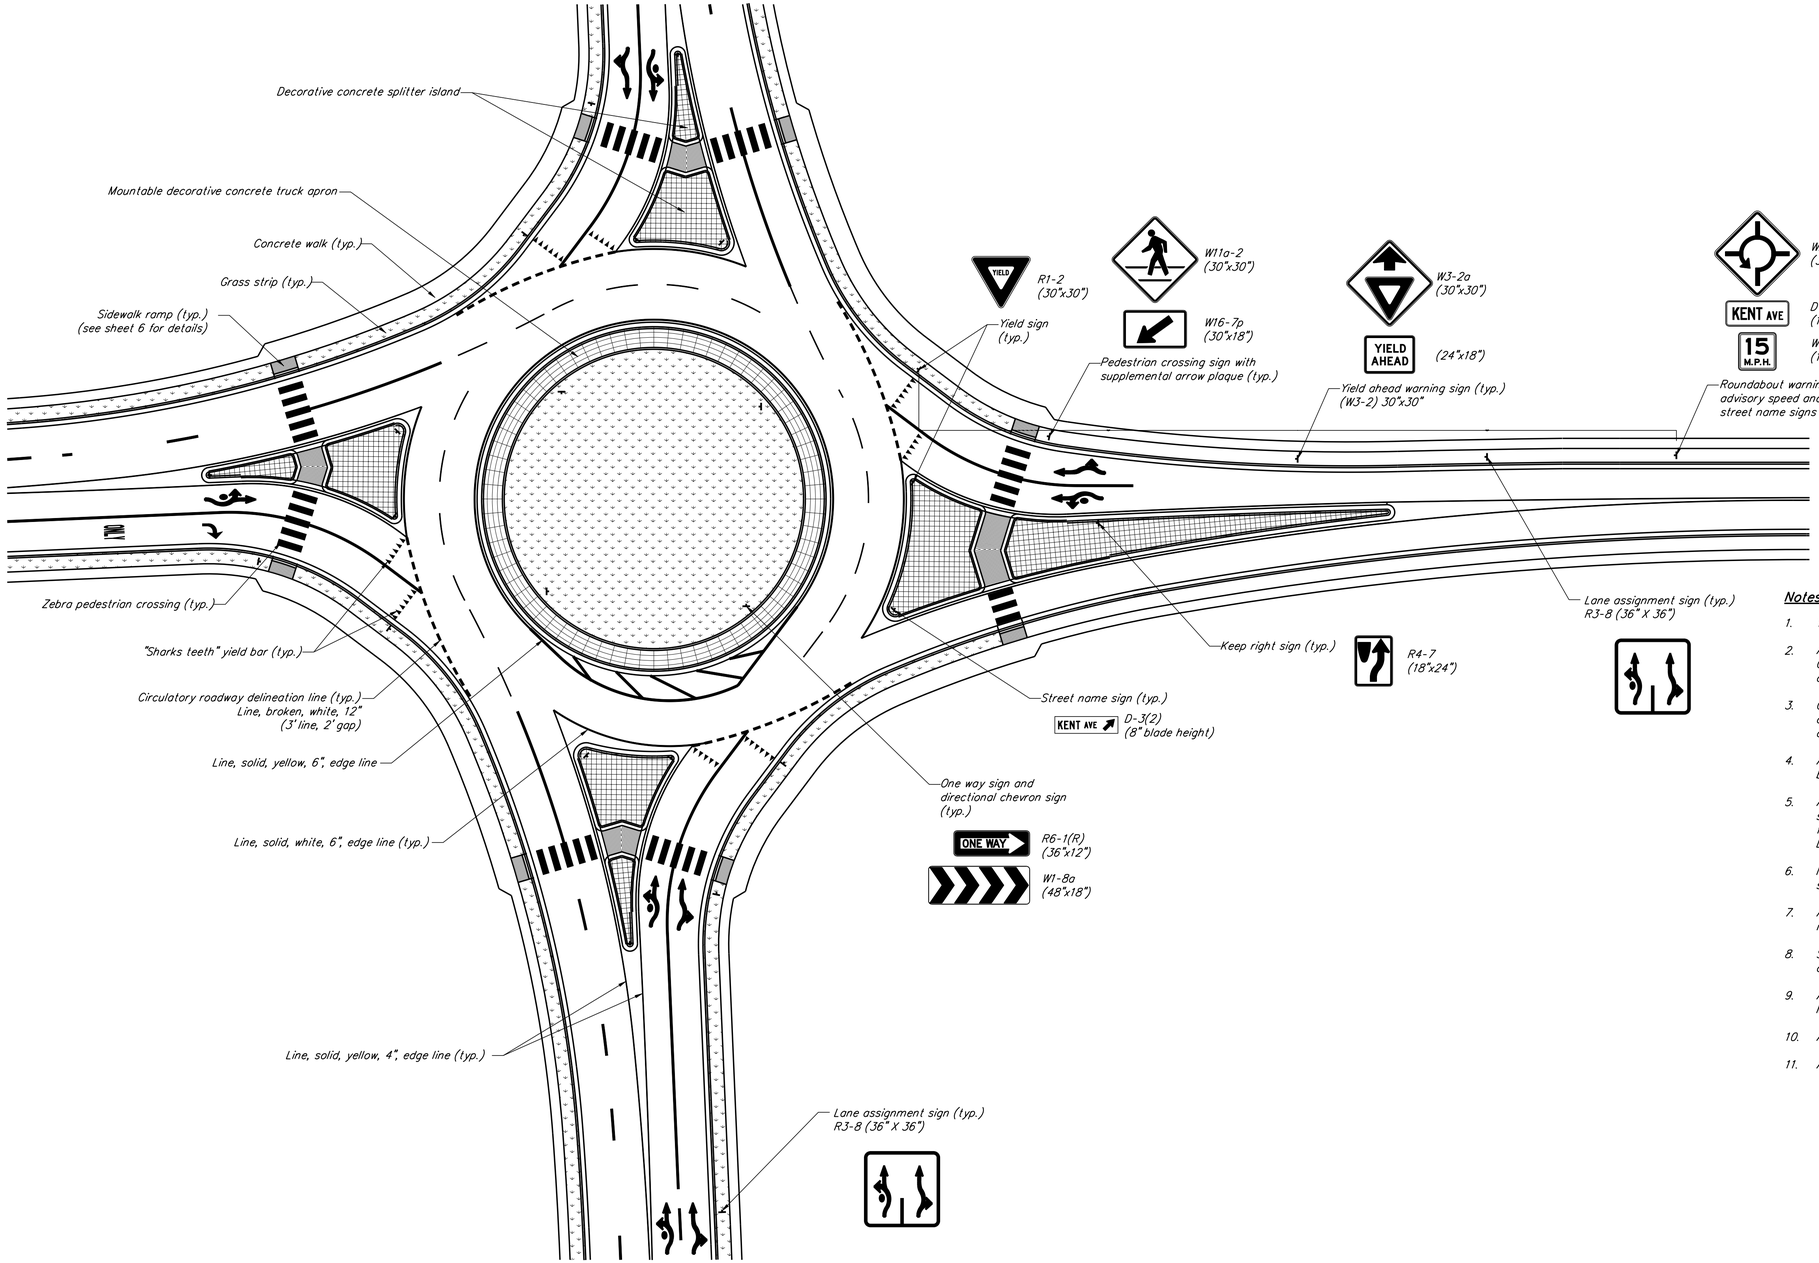

TWO LANE ROUNDABOUT

Not to Scale

Notes On Two Lane Roundabout:

1. This sheet applies to two lane roundabouts.
2. A 7" thick mountable, decorative concrete truck apron shall be provided, if necessary. Concrete coloring and imprinting shall be per the specifications provided in the City of West Lafayette Roundabout Guidelines.
3. Cross walk shall be located a min. o 25 feet from the inscribed circle. A min. 6' wde refuge area shall be provided for pedestrians in the splitter island. N pedestrion crossings shall be allowed into the roundabout central island.
4. Any landscaping or objects located in the middle of the central island shall be approved by the Wst Lafayette Engineers office.
5. All signage and pavement markings shown shall be used as minimums. Multi-lane roundabouts shall use "fish-hook" markings at entries to delineate lane usage as well as advance signage for driver instruction. All signage and pavement markings are subject to approval by the Department of Engineering.
6. No drainage structures shall be located within circumference of inscribed circle of single-lane roundabouts.
7. All pavement markings shall be thermoplastic if pavement material is asphalt or preformed plastic if pavement material is concrete.
8. Snowplowable raised pavement markers (RPM) shall be placed prior to pedestrian crossings, on front point of curb island. there shall be a minimum of five (5) RPM's.
9. All signs shall be high intensity, high reflectivity and in accordance with the most recent Indiana Manual on Uniform Traffic Control Devices. See this sheet for sign codes and sizes.
10. All other appropriate City of West Lafayette standards apply.
11. All roundabout designs must be approved by the Department of Engineering.

DAVID M. BUCK
REGISTERED
No. 10001191
STATE OF INDIANA
PROFESSIONAL ENGINEER

CITY OF WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Two Lane Roundabout Details

RECOMMENDED FOR APPROVAL — CITY ENGINEER — 01/01/10 DATE

Date:	Jan. 2010	Sheet	10 of 18

Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R510

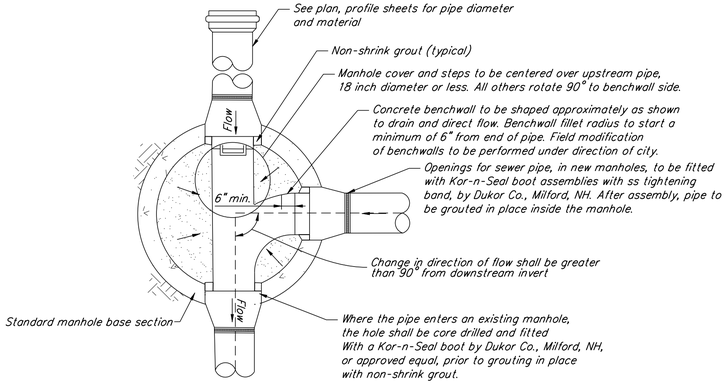

STANDARD SANITARY MANHOLE PLAN

Not To Scale

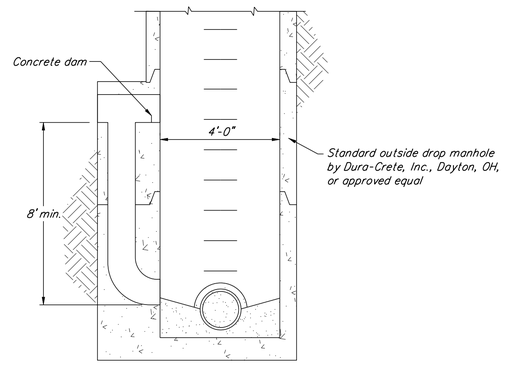

PRECAST OUTSIDE DROP MANHOLE

Not To Scale

Notes:

Prior written approval of the City is required for use of an outside drop manhole.

See standard manhole for additional details.

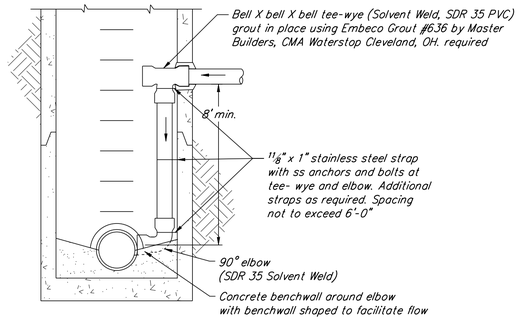

INSIDE DROP MANHOLE DETAIL

(Existing manholes only)
Not To Scale

Notes:

Prior written approval of the City is required for use of an outside drop manhole.

See standard manhole for additional details.

Sanitary Sewer Notes:

1. Sanitary sewers to be polyvinyl chloride (PVC) SDR 35 pipe and shall meet or exceed ASTM D3034 or ASTM 679 as applicable. joints shall be gasketed, bell and spigot type with the bell made integral with the pipe. The bell shall be installed in the upstream position. See plan, profile sheets for sizes. Sanitary sewers to be SDR 26 pipe for depth 14' or greater.
2. Sanitary sewer laterals for house connections shall be 6" diameter PVC SDR 35 conforming to ASTM D3034, laid at a minimum slope of 1.04%. Ends to be plugged. Joints shall be gasketed bell and spigot type with the bell made integral. The bell shall be installed in the upstream position. pipe laterals longer than 150' require a manhole.
3. Lateral connections to an existing clay or concrete sewer shall be made with a boot-n-saddle with stainless steel straps and appropriate rubber fitting. connections to an existing flexible sewer pipe shall be made with the appropriate manufactured fittings and sealed in place.
4. The completed sanitary sewer shall be high pressure water jet cleaned and subjected to an air test conforming to ASTM F1417-92. A deflection test shall be performed with a "go-no-go" mandrel (95%) according to IDEM standards. Cleaning, televising and testing shall be performed a minimum of 45 days (or approved minimum timeframe) after installation and witnessed by the city. All costs of cleaning and testing are to be borne by the contractor. Closed circuit television inspection of the system shall be required. A copy of the video (MPEG or DVD format) shall be retained by the City. All costs of televising are to be borne by the contractor.
5. Manholes shall be air tested in accordance with ASTM C1244-93. Standard test method for concrete sewer manholes by the negative air pressure (vaccum) test.
6. 1'-6" vertical separation and 10'-0" horizontal separation to be maintained between watermains hydrants and sewers (sanitary and storm).
7. Trenches under paved areas (excluding sidewalks) shall be backfilled with granular material per INDOT "standard specifications", 1999 edition, section 211, and compacted in lifts. Granular material to extend 5 feet beyond the limits of the paved area with a 1:1 slope to the bottom of the trench.
8. Connections to existing manholes to be core drilled and fitted with a Kor-n-Seal boot by Dukor Co., Milford, NH, prior to grouting in place with non-shrink grout.
9. All sewer lines shall have a 0.1 ft. drop through the manhole. Where sewer lines change direction, the manhole invert elevation shall drop 0.25 ft. (typical) thru the manhole.
10. Sewer permit and City inspection required for all connections to storm or sanitary sewer systems. Sewer permit required on site during any sewer construction.
11. Top of manhole frames to be set at proposed yard or sidewalk grade when located in front yard area of lot or right-of-way. When manhole is in a traveled way, the top of the lid shall be flush with the final surface, and backfill shall be granular to the surface. In all other areas, the top of the frame shall be one 1'-0" above the surrounding grade, sloping away from the manhole for a distance of 6'-0" in all directions.
12. Where proprietary equipment is specified, "or approved equal" is implied. All proposals for substitution shall be submitted to the City in writing for approval.
13. Mark the locations of the sanitary sewer lateral by stamping "SS" in the curb. Similarly, stamp "MH" in the curb to mark the locations of manholes.
14. All fittings to be SDR 26 PVC.

Television Inspection Criteria - Sanitary Sewers:

Sewers are to be "flooded" before television inspection. The image shall be clear enough to enable the City representative and others viewing the monitor to easily evaluate the interior condition of the pipe.

All unacceptable conditions found during television inspection must be corrected by the contractor and retelevised.

Unacceptable conditions are conditions that adversely effect the ability of the system to function as designed or to be properly maintained and may include, but are not limited to, the following:

A. Protruding taps
B. Cracked or faulty pipe
C. Misaligned or deformed pipe
D. Debris in line
E. Infiltration/exfiltration
F. Excessive gaps at joints
G. Bellies or sags with a depth greater than or equal to 10% (or a maximum of 1'2") of pipe diameter and/or a length greater than 25 feet.
H. Exposed gaskets

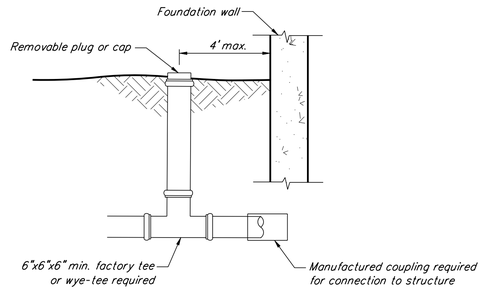

CLEAN-OUT DETAIL

Not To Scale

Minimum Design Slopes	
Sewer Diameter	Min. Slope in ft/100 ft (m/100m)
8" (203 mm)	0.45
10" (254 mm)	0.33
12" (305 mm)	0.27
15" (381 mm)	0.20
18" (457 mm)	0.17
24" (610 mm)	0.12
30" (762 mm)	0.10
36" (914 mm)	0.10
42" (1067 mm)	0.10
48" (1218 mm)	0.10

STANDARD SANITARY MANHOLE DETAIL

Not To Scale

Notes:

Precast concrete manholes shall conform to ASTM C-478

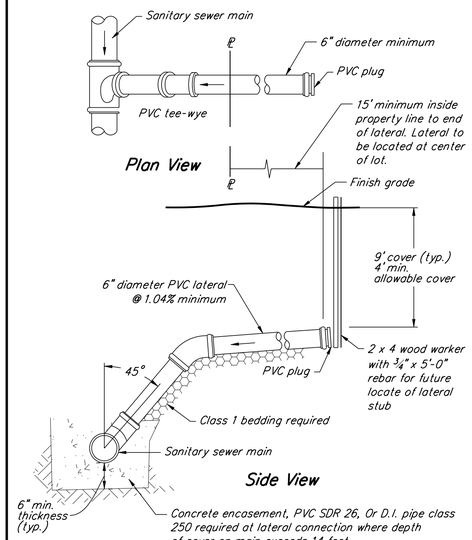

LATERAL CONNECTION DETAIL

Not To Scale

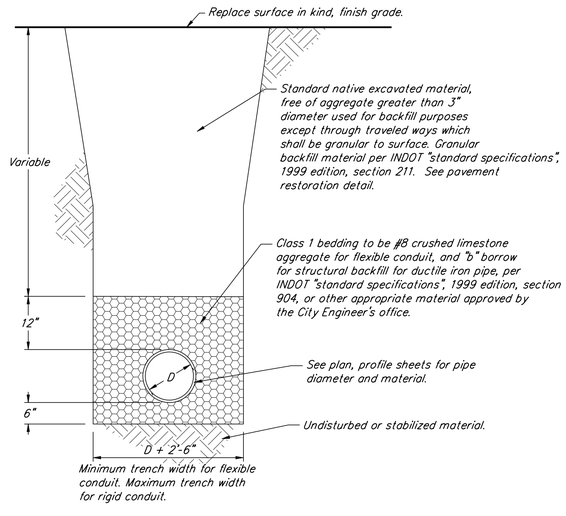

STANDARD BEDDING DETAIL

Not To Scale

DAVID M. BUCK
REGISTERED
No. 10001191
STATE OF INDIANA
PROFESSIONAL ENGINEER

CITY OF WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Sanitary Sewer Details

RECOMMENDED FOR APPROVAL — CITY ENGINEER — 01/01/10 DATE

Date: Jan. 2010 | Sheet 11 of 18

Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R511

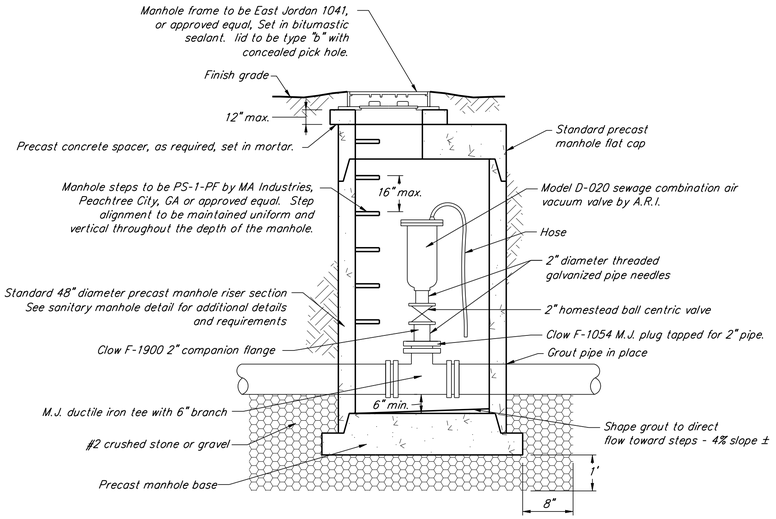

SEWAGE FORCEMAIN AIR RELEASE MANHOLE

Not To Scale

Notes:

Precast Concrete Manholes Shall Conform To ASTM C-478

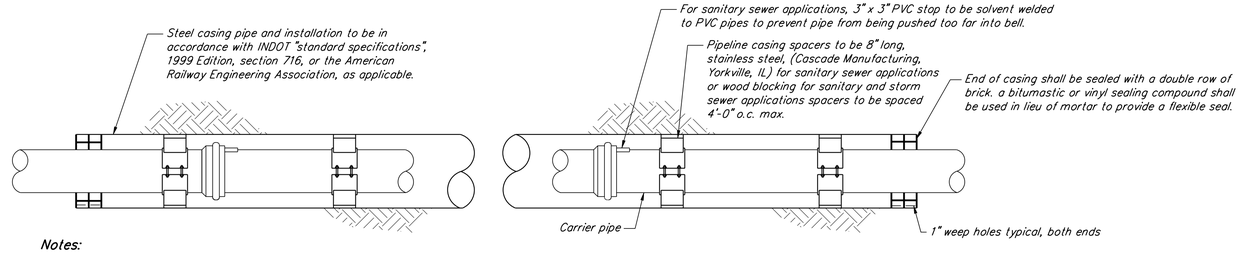

Notes:

Boring pits to be located at least 30' from limited access highway pavement, at least 12' from other state and federal highway pavement, and at least 25' from the centerline of a railroad.

All work on the carrier pipe supports to be performed per the City's field instructions. Grouting of the annular space between the carrier pipe and the casing will be required on all gravity sewers. Grout mixture to be:

- 1880# cement
- 128 gallons water
- 4 gallons of 886 super plastizer
- By W.R. Grace, Inc.
- 5# grout solidifier

Carrier pipe to be PVC for sanitary sewers and ductile iron or concrete for storm sewers.

PIPE CASING DETAIL

Not To Scale

The casing pipe shall be welded steel pipe, new And unused materiol, in accordance with current ASTM specification A-139, Grade B For "Electric Fusion Of Welded Steel Pipe", with a minimum yield of 35,000 psi.

The inside diameter of the casing pipe shall be at least six (6) inches greater than the largest diameter of the pipeline joint.

The minimum wall thickness of the casing pipe shall be as listed in the following table or as shown on the applicable drawings:

Diameter of casing	Wall Thickness (In.) Under highway	Under railroad
16" or smaller	0.250	0.312
18"	0.250	0.312
20"	0.312	0.344
24"	0.375	0.438
30" through 42"	0.500	0.563
48"	0.625	0.625
54"	0.875	0.875
66"	1.00	1.00

CASING SPECIFICATION

Not To Scale

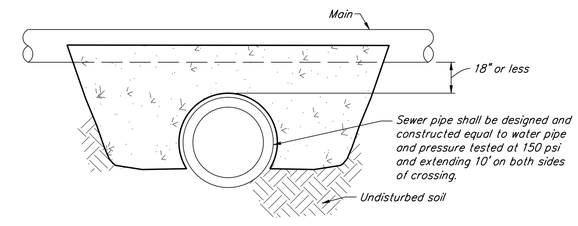

PIPE CROSSING DETAIL

Not To Scale

Notes:

This detail to be used when a main, sewer or water, crosses within 18" of another pipe or conduit.

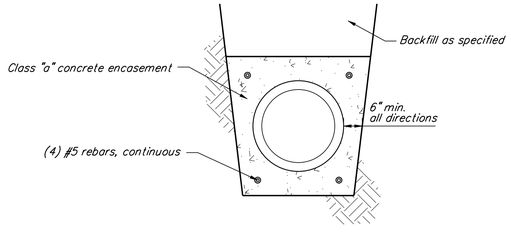

PIPE ENCASEMENT DETAIL

Not To Scale

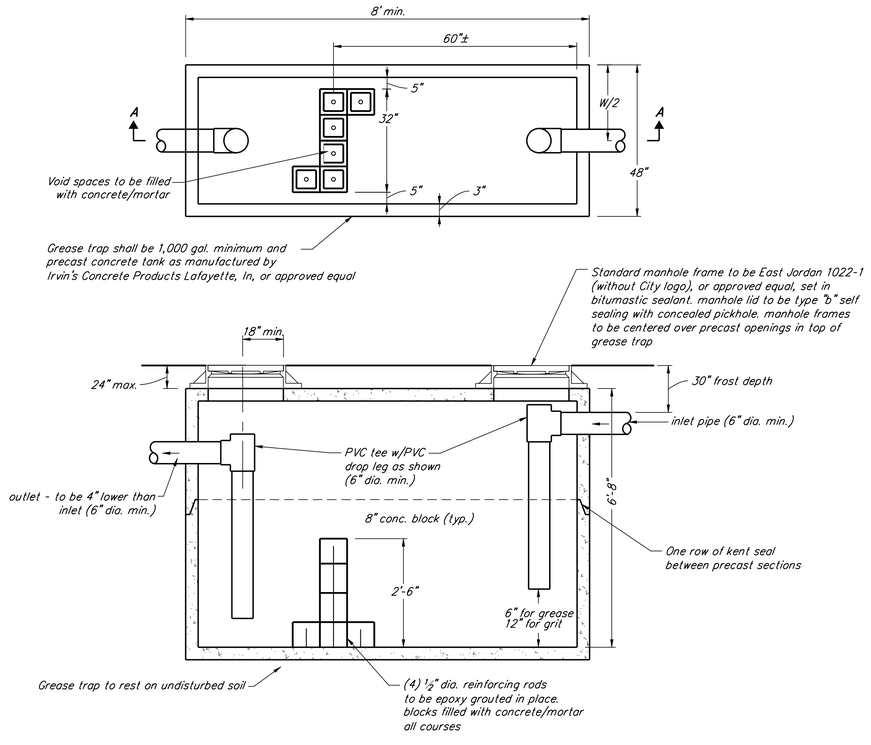

GREASE/GRIT TRAP (COMMERCIAL)

Not To Scale

Notes:

Grease trap sizing calculations shall be submitted to the Engineer's Office for approval. Sizing calculations shall be in accordance with section 501. Grease traps, of the Indiana State Board Of Health, Bulletin S.E. 13, Latest Edition, "On-site water supply and wastewater disposal for public and commercial establishments"

General Notes:

1. Whenever proprietary equipment is specified, "or approved equal" is implied.
2. All proposals shall be submitted to the City in writing for their approval.
3. Shop drawings must be submitted for approval prior to approval or installation.

DAVID M. BLOCK REGISTERED No. 10001191 STATE OF INDIANA PROFESSIONAL ENGINEER

CITY OF WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Sanitary Sewer and Misc. Utility Details

RECOMMENDED FOR APPROVAL _____ CITY ENGINEER 01/01/10 DATE

Date:	Jan. 2010	Sheet	12 of 18

Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R512

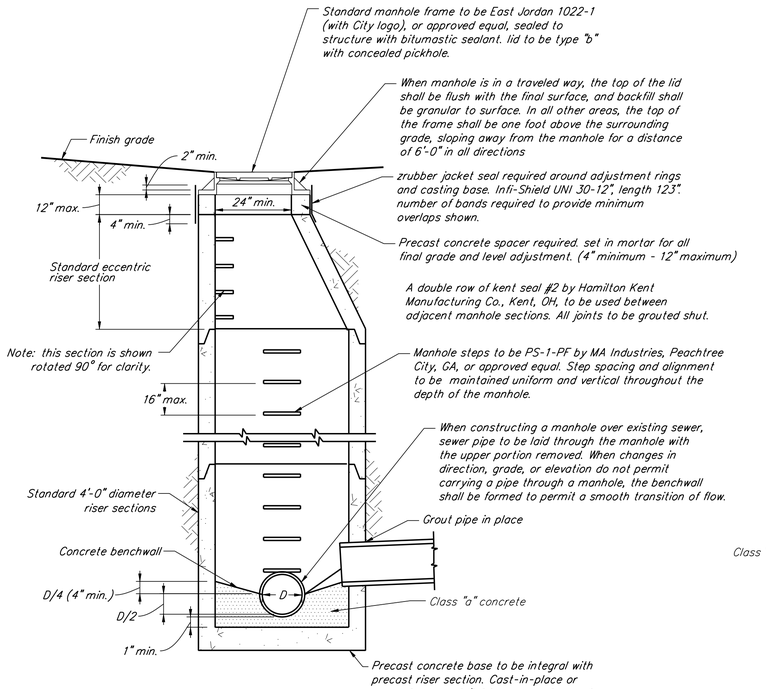

Type A (Standard)

Notes:

Precast concrete manholes shall conform to ASTM C-478

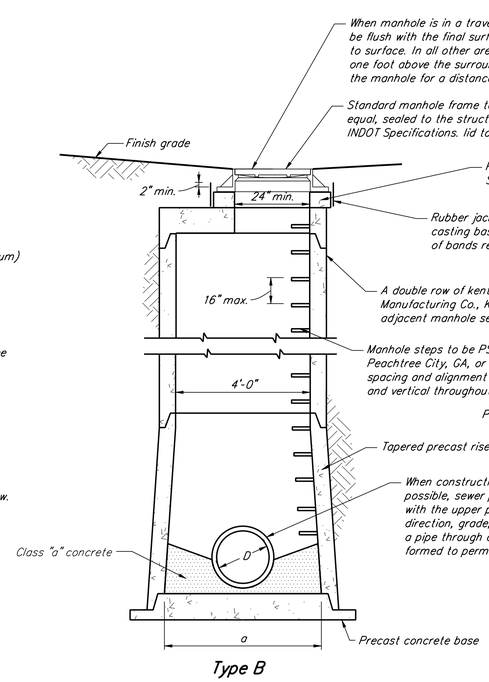

Type B

Manhole Selection Table - Circular				
Type	Pipe diameter "D"	Riser diameter "A"	Maximum pipe size for main line	Maximum pipe size 90° to main line
A	Up to 24"	48"	24"	24"
B	24"-36"	--	36"	30"
C	24"-33"	60"	36"	30"
D	36"-48"	72"	48"	36"
E	48"-54"	96"	54"	48"
F	54"-72"	102"	72"	66"
G	72"-84"	108"	84"	72"

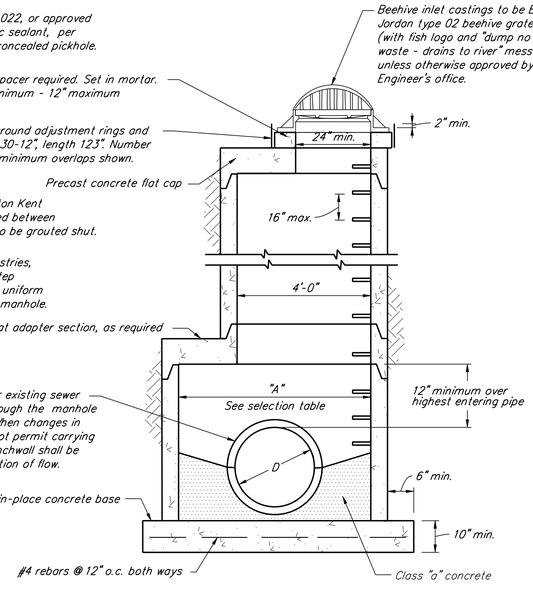

Type C, D, E, F, G, H, J, K, And L

Manhole Selection Table Rectangular		
Type	Pipe Diameter "D"	Width "A"
A	Up To 24"	48"
H	27"-42"	60"
J	28"-60"	78"
K	66"-84"	108"
L	90"-108"	132"

Storm Sewer Notes:

1. Storm sewer pipe and appurtenances shall conform to City of West Lafayette specifications for design and quality of construction, and City of West Lafayette Ordinance No. 08-05, "The West Lafayette Stormwater Code", for design and materials.
2. Construction procedures and materials shall comply with applicable sections Of INDOT "Standard Specifications", 1999 Edition.
3. Pipe used in storm sewer construction shall be concrete pipe (ASTM C-76) with a minimum dimaeter of 12". Other pipe and fittings not specified herein may be used only when specifically authorized by the City. Pipe joints shall be flexible and water tight and shall conform to the requirements of sections 906.04, 906.05 (materials) of the INDOT "Standard Specificiations", 1999 Edition.
4. All storm sewers shall be high pressure water jet cleaned. Mainline storm sewers (manhole to manhole) shall be televised. Lateral storm sewers (manhole to inlet, inlet to inlet) in excess of 20 ft. shall also be televised. mainline storm sewers and lateral storm sewers that are 36" diameter or less shall be subjected to a deflection test using a "go-no-go" mandrel (90% diameter) when constructed using flexible pipe conduit materials. Mainline storm sewers and lateral storm sewers that are greater than 36" diameter require third party testing and certification (daily) of the bedding installation when constructed using flexible pipe conduit material. Cleaning, testing and televising shall be performed a minimum of 45 days (or approved minimum timeframe) after installation, and shall be witnessed by the City. All costs of cleaning, testing and televising are to be borne by the contractor. A copy of the video (MPEG or DVD format) shall be retained by the City.
5. Trenches under paved areas (excluding sidewalks) shall be backfilled with granular material per INDOT "Standard Specifications", 1999 Edition, Section 211, and compacted in lifts. Granular material to extend five feet beyond the limits of the paved area with a 1:1 slope to the bottom of the trench. Flowable mortar per section 213 of INDOT "Standard Specifications" 1999 Edition, may be used in lieu of granular material.
6. Configuration of inlets in private parking or driving areas may be varied to accommodate the dimensions of the castings. Prior written approval of the City is required.
7. 1'-6" vertical separation and 10'-0" horizontal separation to be maintained between watermains, hydrants and sewers (sanitary and storm).
8. Sewer permit and City inspection required for all connections to storm or sanitary sewer systems. Sewer permit required on site during any sewer construction.
9. All taps to concrete pipe shall be made with boot and saddle connectors.
10. All inlets are to be depressed 0.1 ft. below plan grade.
11. All sewer lines shall have 0.1 ft. drop through manholes.
12. Castings shall be centered on opening in structures.
13. Minimum 4" opening required on back of curb inlet casting.
14. Top of manhole frames to be set at proposed yard or sidewalk grade when located in front yard area of lot or right-of-way.
15. Bicycle safe grates required in paved areas, excluding paved flowlines in swales or detention areas.
16. If any existing field tile systems are encountered during the construction process, the contractor shall be responsible for reconstructing the tile to its original bonditions or connect it into the proposed storm drainage system.
17. Whenever proprietary equipment is specified, "or approved equal" is implied, all proposals for substitution shall be submitted to the City in writing for approval.

Television Inspection Criteria - Storm Sewers:

Sewers are to be "flooded" before television inspection. The image shall be clear enough to enable the City representative and others viewing the monitor to easily evaluate the interior condition of the pipe.

All unacceptable conditions found during television inspection must be corrected by the contractor and retelevised.

Unacceptable conditions are conditions that adversely effect the ability of the system to function as designed or to be properly maintained and may include, but are not limited to, the following:

A. Protruding taps
B. Cracked or faulty pipe
C. Misaligned or deformed pipe
D. Debris in line
E. Infiltration/exfiltration
F. Excessive gaps at joints
G. Bellies or sags with a depth greater than or equal to 10% (or a maximum of 1½") of pipe diameter and/or a length greater than 25 feet.

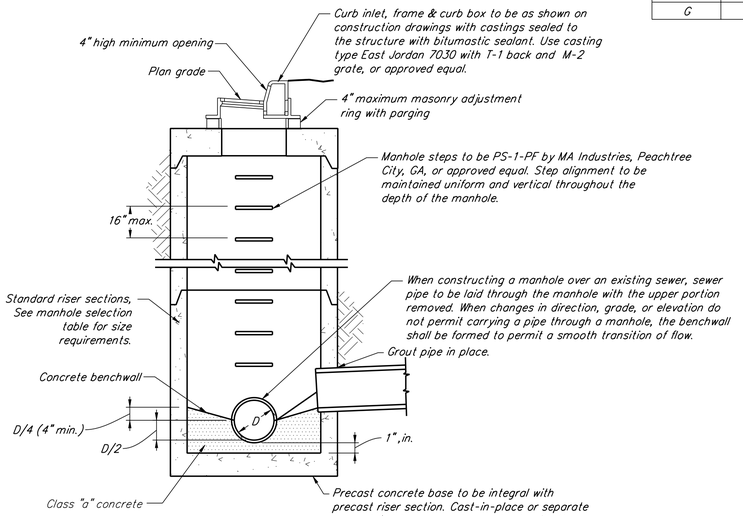

STORM SEWER MANHOLE - INLET

Not To Scale

Notes:

See storm sewer manhole sections for additional details.

Precast concrete manholes shall conform to ASTM C-478

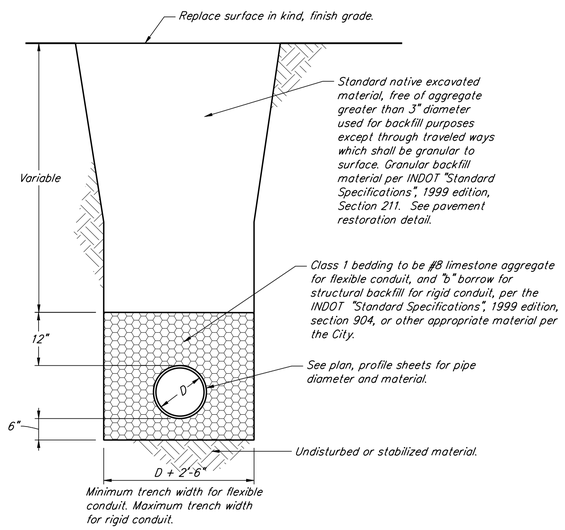

STANDARD BEDDING DETAIL

Not To Scale

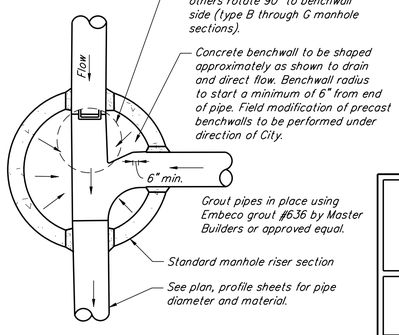

STORM SEWER MANHOLE PLAN

Not To Scale

DAVID M. BUCK REGISTERED No. 10001191 STATE OF INDIANA PROFESSIONAL ENGINEER

CITY OF WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Storm Sewer Details

RECOMMENDED FOR APPROVAL — CITY ENGINEER — DATE 01/01/10

Date:	Jan. 2010	Sheet	13 of 18

Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R513

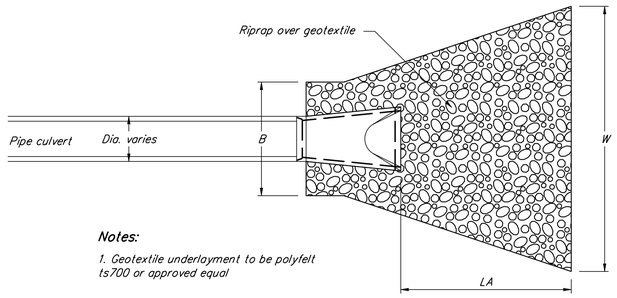

Notes:

1. Geotextile underlayment to be polyfelt ts700 or approved equal

Plan View

Str. #	B	LA	W	Thickness	D 50
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	*

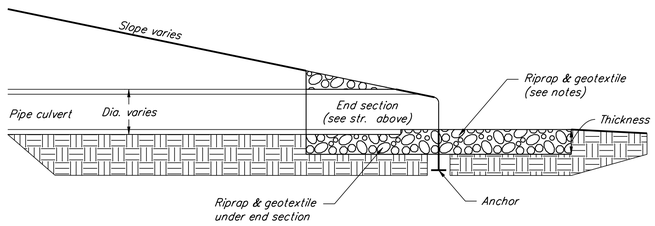

Cross Section

RIPRAP DETAIL @ END SECTION

Not to Scale

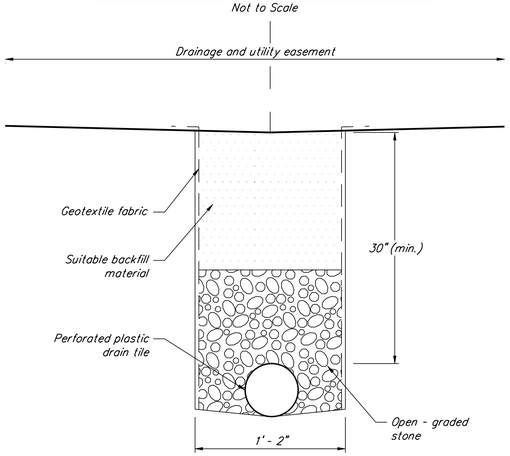

REAR YARD UNDERDRAIN DETAIL

Not to Scale

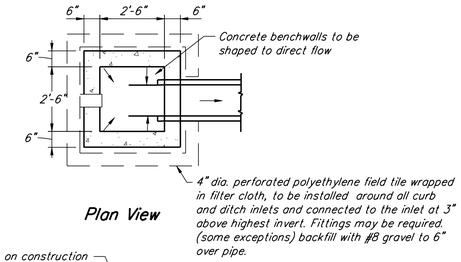

Plan View

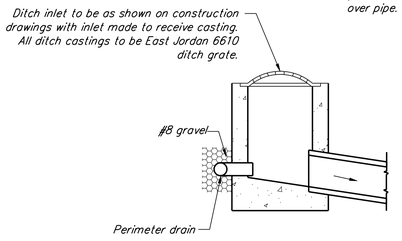

Section View

DITCH INLETS - PRECAST TYPE

Not To Scale

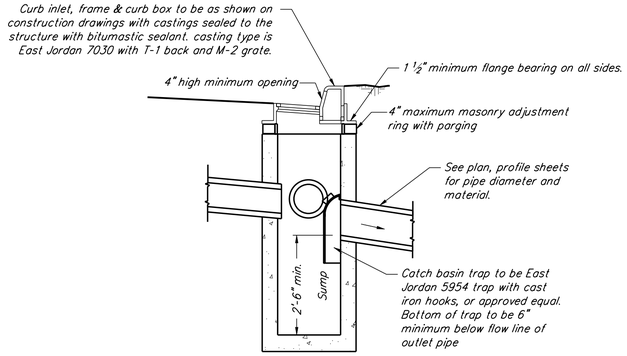

Section View

CATCH BASIN

Not To Scale

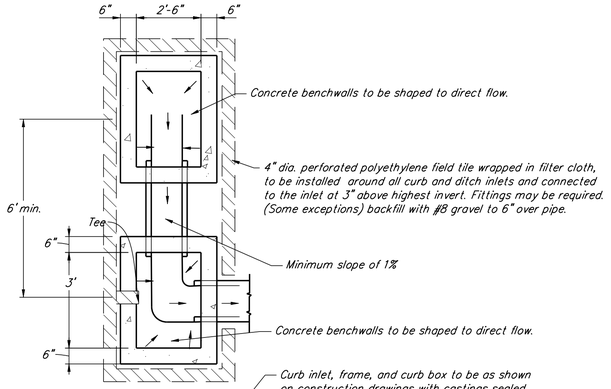

Plan View

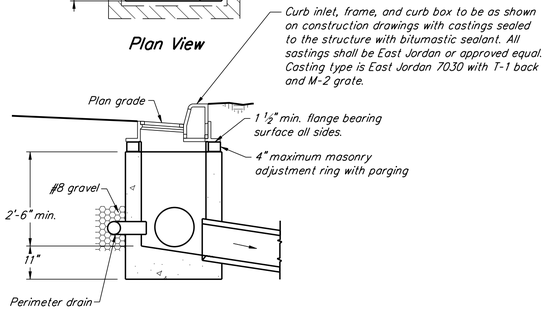

Section View

CURB INLETS - PRECAST TYPE

Not To Scale

Notes:

Prior written approval of Engineer required for use of cast-in-place or masonry structures.

Double inlet to be spaced a minimum of 6 feet center to center.

Triple inlet to be a mirror image of double inlet, centered on the outlet pipe

DAVID M. BUCK REGISTERED No. 10001191 STATE OF INDIANA PROFESSIONAL ENGINEER

CITY OF WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Miscellaneous Details

RECOMMENDED FOR APPROVAL _____ 01/01/10
CITY ENGINEER DATE

Date: Jan. 2010 | Sheet 14 of 18

Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R514

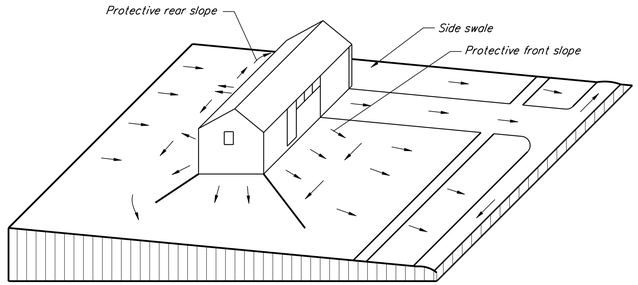

Grading method for lot where slope is from rear to front lot. Drainage swales are located at rear and sides of dwelling.

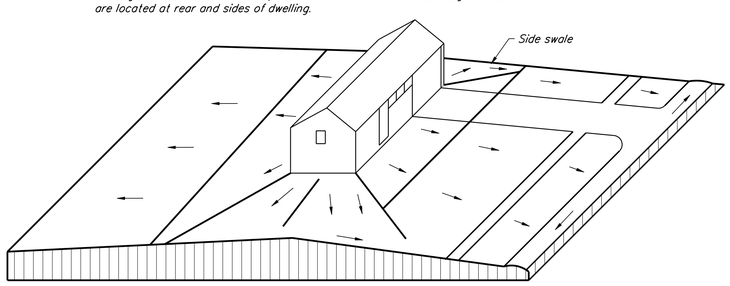

Grading method for lot where dwelling is located on a ridge. Drainage swales are located at side yards in the area of positive slopes.

LOT DRAINAGE DETAIL (TYPICAL)

Not To Scale

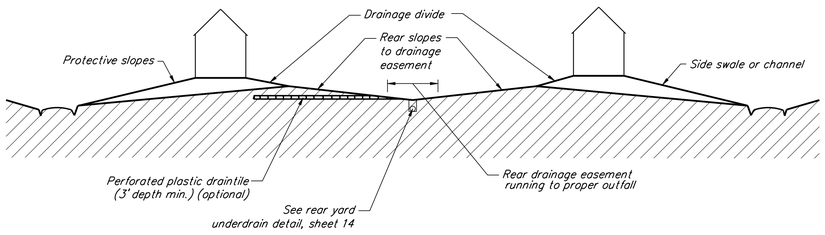

BACK TO BACK LOT SECTION DETAIL (TYPICAL)

Not To Scale

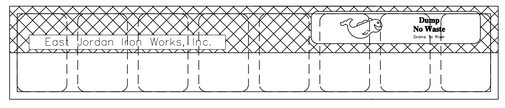

Location (Top Of Box)

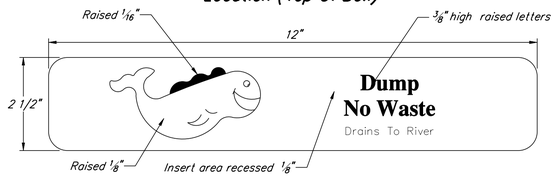

LOGO DETAIL AND LOCATION

Not To Scale

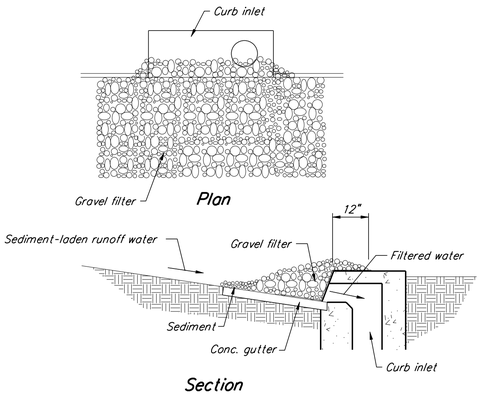

GRAVEL FILTER CURB INLET PROTECTION

Not To Scale

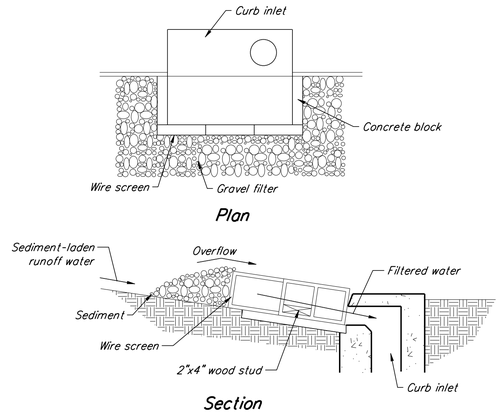

BLOCK AND GRAVEL CURB INLET PROTECTION

Not To Scale

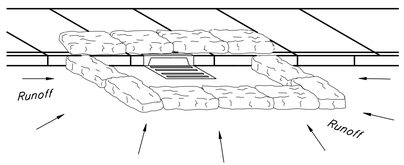

For Inlets That Are In Low Points

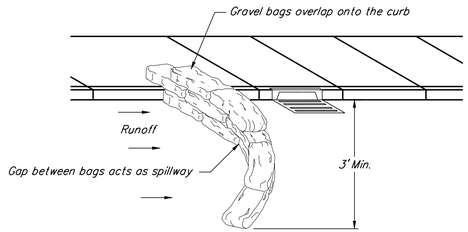

For Inlets That Are On Sloping Sites Or Continuous Grades

GRAVEL FILTER BAGS CURB INLET PROTECTION

Not To Scale

Notes:

Gravel bags are half full with rock larger than the inlet grate and packed Close together to eliminate gaps. If bag deteriorates or is damaged, rebag old bag with contents into a new bag.

Erosion Control-Seeding Recommendations:

This table provides several seeding options. Additional seed species and mixtures are available commercially. When selecting a mixture, consider site conditions, including soil properties (ex. soil ph and drainage), slope aspect and the tolerance of each species to shade and drought.

Seed species and mixtures	Rate per acre	Optimum soil ph
Open and disturbed areas (remaining idle for more than 1 year)		5.5 to 7.5
		5.6 to 7.0
1. Perennial ryegrass	35-50 lbs.	
+ white or ladino clover	1-2 lbs.	
2. Kentucky bluegrass	20 lbs.	
+ smooth bromegrass	10 lbs.	
+ switchgrass	3 lbs.	
+ timothy	4 lbs.	
+ perennial ryegrass	10 lbs.	
+ white or ladino clover	1-2 lbs.	5.6 to 7.0
3. Perennial Ryegrass	15-30 lbs.	
Tall fescue	15-30 lbs.	
4. Tall fescue	35-50 lbs.	5.5 to 7.5
+white or ladino clover	1-2 lbs.	

For best results: (A) legume seed should be innoculated; (B) seeding mixtures containing legumes should preferably be spring-seeded although the grass may be fall-seeded and the legume frost-seeded (practice 3.13); and (C) if legumes are fall-seeded, do so early in fall.

Fertilize:
According to soil test or use 600 lbs./acre of 12-12-12 analysis, or equivalent, fertilizer.

Mulch:
Mulch shall be straw or hay. Material should be dry, unchopped free of undesirable seeds and spread by hand or machine. Wood fiber or cellulose may be used and applied with a hydromulcher and use of a tacking agent. Steep banks and cuts, low maintenance areas (not mowed), channels, and areas of concentrated flow require alternate seeding and mulch anchoring methods. Refer to Indiana Handbook For Erosion Control in developing areas.

General Notes:

1. Whenever proprietary equipment is specified, "or approved equal" is implied. All proposals for substitution shall be submitted to the City in writing for their approval.

2. Prior written approval must be obtained from the City Engineer for use of cast in place or masonry structures.

DAVID M. BECK REGISTERED No. 10001191 STATE OF INDIANA PROFESSIONAL ENGINEER

CITY OF WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Storm Sewer Structures, Drainage, and Erosion Control Details

RECOMMENDED FOR APPROVAL — CITY ENGINEER — 01/01/10 DATE

Date: Jan. 2010	Sheet 15 of 18
Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R515

Construction Sequence For Building Site Erosion Control Practice

Step 1. Evaluate The Site
Before construction evaluate the entire site, marking for protection any important trees and associated rooting zones, unique areas to be preserved, on-site septic system absorption fields, and vegetation suitable for filter strips, especially in perimeter areas.

Identify Vegetation To Be Saved
•Select and identify the trees, shrubs, and other vegetation to be saved (see "vegetative filter strips" under step 2 below). Any trees within City right of way require City approval prior to being removed.

Protect Trees And Sensitive Areas
•To prevent root damage, do not grade, burn, place soil piles, or park vehicles near trees or in areas marked for preservation.
•Place plastic mesh or snow fence barriers around the trees' dripline to protect the area below their branches.
• Place a physical barrier, such as plastic fencing, around the area designated for a septic system absorption field (if applicable).

Step 2. Install Perimeter Erosion And Sediment Controls
Identify the areas where sediment-laden runoff could leave the construction site, and install perimeter controls to minimize the potential for off-site sedimentation. It is important that perimeter controls are in place before any other earth-moving activities begin.

Protect Down-Slope Areas With Vegetative Filter Strips
• On slopes of less than 6 percent, preserve a 20 to 30 foot wide vegetative buffer strip around the perimeter of the property and use it as a filter strip for trapping sediment. •Do not mow filter strip vegetation shorter than 4 inches

With Silt Fence
•Sse silt fencing along the perimeter of the lot's downslope side(s) to trap sediment (see silt fence detail).

Install Gravel Drive
•Restrict all lot access to this drive to prevent vehicles from tracking mud onto roadways (see construction gravel entrance detail).

Protect Storm Sewer Inlets
•Protect nearby storm sewer curb inlets with stone-filled or gravel-filled geotextile bags (see gravel filter bags detail on previous sheet) or equivalent measures before disturbing soil.
•Protect on-site storm sewer drop inlets with silt fence material, pre-fabricated baskets, straw bales, or equivalent measures before disturbing soil.

Step 3. Prepare The Site For Construction
Prepare the site for construction and for installation of utilities. Make sure all contractors (especially the excavating contractor) are aware of areas to be protected.

Salvage And Stockpile Topsoil/Subsoil
•Remove topsoil (typically the upper 4 to 6 inches of soil material) and stockpile.
•Remove subsoil and stockpile separately from the topsoil.
•Locate the stockpiles away from any downslope street, driveway, stream, lake, wetland, ditch, or drainageway.
•Immediately after stockpiling, temporary-seed the stockpiles with annual rye or winter wheat and/or place sediment barriers around the perimeter of the piles.

Step 4. Build The Structure(s) And Install The Utilities
Construct The Building And Install The Utilities; Also Install The Sewage Disposal System And Drill The Water Well (If Applicable); Then Consider The Following:

Install Downspout Extenders
•Although not required, downspout extenders are highly recommended as a means of preventing lot erosion from roof runoff.
•Add the extenders as soon as the gutters and downspouts are installed (see temporary downspout extenders detail).
•Be sure the extenders have a stable outlet such as the street, sidewalk, or a well vegetated area.

Step 5. Maintain The Control Practices
Maintain all erosion and sediment control practices until construction is completed and the lot is stabilized.
•Inspect the control practices a minimum of twice a week and after each storm event, making any needed repairs immediately.
•Toward the end of each workday, sweep or scrape up any soil tracked onto roadways. Do not flush areas with water.
•By the end of the next workday after a storm event, clean up any soil washed off-site.

Step 6. Revegetate The Building Site
Immediately after all outside construction activities are completed, stabilize the lot with sod, seed, and/or mulch.

Redistribute The Stockpiled Subsoil And Topsoil
• Spread the stockpiled subsoil to rough grade.
• Spread the stockpiled topsoil to a depth of 4 to 6 inches over rough-graded areas.
• Fertilize and lime according to soil test results or recommendations of a seed supplier or a professional landscaping contractor.

Seed Or Sod Bare Areas
• Contract local seed suppliers or professional landscaping contractors for recommended seeding mixtures and rates.
• Follow recommendations of a professional landscaping contractor for installation of sod.
• Water newly seeded/sodded areas every day or two to keep the soil moist. Less watering is needed once grass is 2 inches tall.

Mulch Newly Seeded Areas
•Spread straw mulch on newly seeded areas, using 1 1/2 to 2 bales of straw per 1,000 square feet.
•On flat or gently sloping land, anchor the mulch by crimping it 2 to 4 inches into the soil. On steep slopes, anchor the mulch with netting or tackifiers. An alternative to anchored mulch would be the use of erosion control blankets.

Step 7. Remove Remaining Temporary Control Measures
Once the sod and/or vegetation is well established, remove any remaining temporary erosion and sediment control practices, such as:

•Downspout extenders (Or shorten to outlet onto the vegetated areas, allowing for maximum infiltration.
•Storm sewer inlet protection measures.

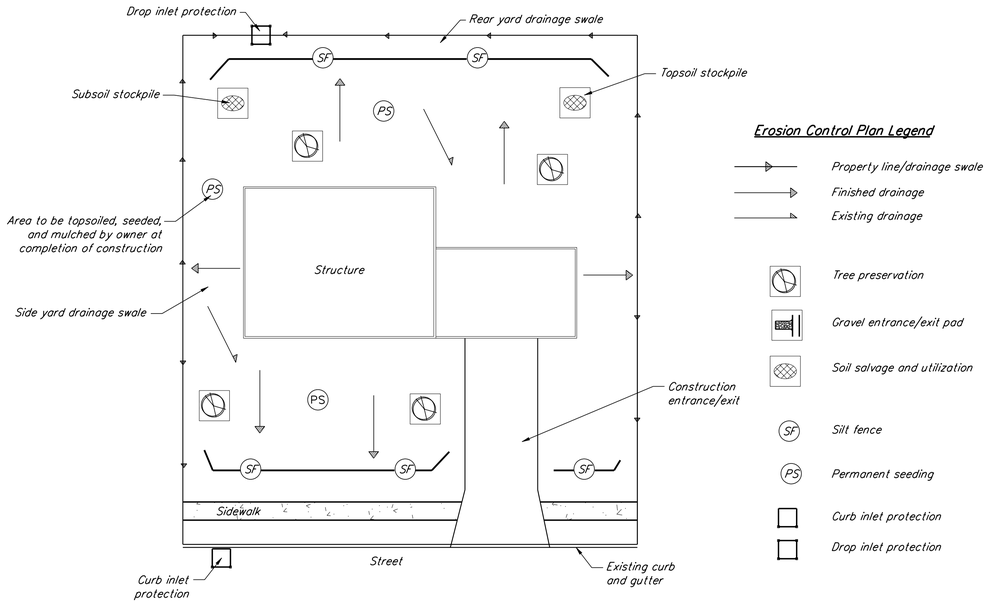

Notes:
1. Erosion/sediment control measures must be functional and be maintained throughout construction.
2. Maintain positive drainage away from the structure(s).

Sample Erosion/Sediment Control Practice Plan
Typical structure under construction

CONSTRUCTION SEQUENCE FOR BUILDING SITE EROSION CONTROL PRACTICE
Compiled information prepared by the division of soil conservation, Indiana Department of Natural Resources
Not To Scale

Erosion Control Notes:
1. Contractor shall install all required silt fences, silt traps, tree protection and inlet protection for existing inlets prior to the start of any earth moving or stripping.
2. Contractor shall install a gravel construction entrance or some other device prior to the start of earthwork as necessary to prevent soil from being tracked or washed into existing roadways.
3. Land alterations which strip the land of vegetation, including regrading, shall be done in a way that will minimize erosion. Whenever feasible, natural vegetation shall be retained and protected as grading is done. Install silt traps, silt fences, slope drains, temporary diversions and other runoff control measures at appropriate locations to keep sediment contained on site.
4. All disturbed areas shall be seeded and straw mulched as shown on the plans immediately after completion of ground disturbing activity, For each phase as the different phases of the site are constructed.
5. Permanent and final vegetation or structural erosion control devices shall be installed as soon as practical.
6. The duration of time which an area remains exposed shall be kept to a practical minimum depending upon the weather. If construction activity is to cease for more than two weeks, the disturbed areas shall be temporarily seeded.
7. All storm sewer inlet protection devices shall be put in place at the time each inlet is constructed.
8. Contractor shall maintain erosion control measures and devices during construction and until siltation of the streets and storm sewers will no longer occur.
9. Once on-site erosion and siltation of the streets and storm sewers will no longer occur, The contractor shall remove and dispose of the temporary erosion control devices.
10. These general procedures may not cover all situations. Refer to erosion control plans for specific notes and additional details.
11. Erosion control shall comply with West Lafayette Ordinance 08-05 (West Lafayette stormwater code), Indiana 327 IAC, and Indiana Handbook for Erosion Control in developing areas.
12. The City Engineer has the authority to request additional erosion control measures or amend erosion control plans subject to actual site conditions.
13. The contractor may substitute different erosion control devices for those shown on the drawings so long as the substituted devices perform as required by West Lafayette ordinance 08-05 (West Lafayette Stormwater Code), Indiana 327 IAC and "Rule 5".
14. The contractor is to install, monitor, and maintain all required erosion control devices in accordance with the applicable provisions of the "Indiana Handbook for Erosion Control in developing areas" latest edition, which is hereby incorporated into these standards by reference and made a part thereof.

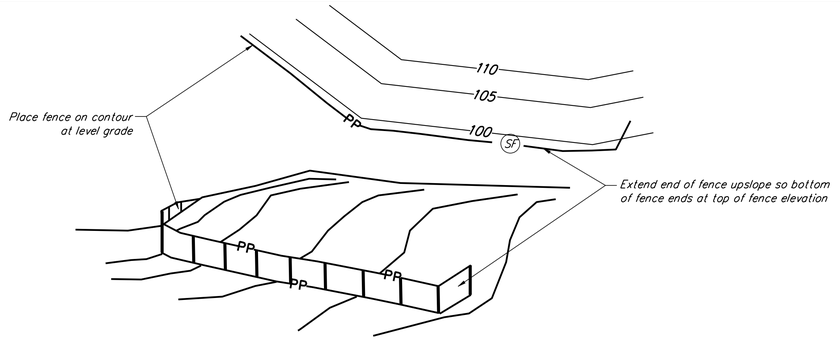

Typical Layout For Silt Fence

Silt Fence Notes:
1. Install parallel to the contour of the land.
2. Extend ends upslope enough to allow water to pond behind the fence.
3. Excavate a trench 4 inches wide and 8 inches deep.
4. Install fence with stakes on the downslope side.
5. Bury 12 inches of fabric in the trench, extending the bottom 4 inches toward the upslope side.
6. Backfill trench with soil material, and compact.
7. Join silt fence sections by overlapping sections and nailing with loth to the nearest post.
8. Inspect twice a week and after each storm event, repairing as needed and removing sediment deposits when they reach one-half the fence height. (note: silt fence has a life expectancy of 6 months to 1 year, whereas straw bale barriers have a limited life of 3 months or less)

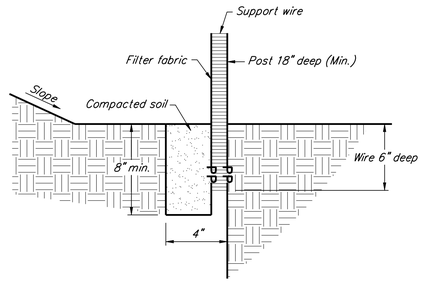

Cross-Section Of Silt Fence

SILT FENCE
Not To Scale

Downspout Notes:
1. Install extenders as soon as gutters and downspouts are installed to prevent erosion from roof runoff.
2. Use non-perforated (unslotted) drainage tile.
3. Route water to a stable grassed or paved area or to the storm sewer.
4. Remove after vegetation is established.

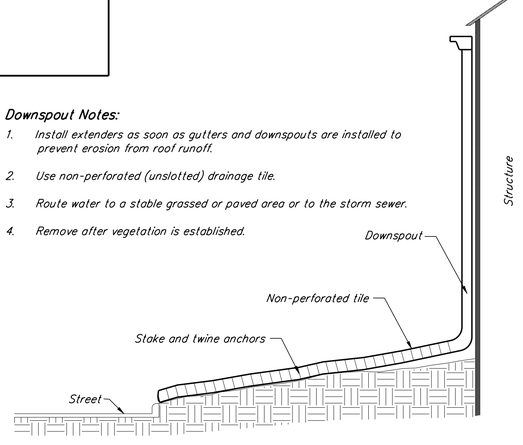

TEMPORARY DOWNSPOUT EXTENDERS
Not To Scale

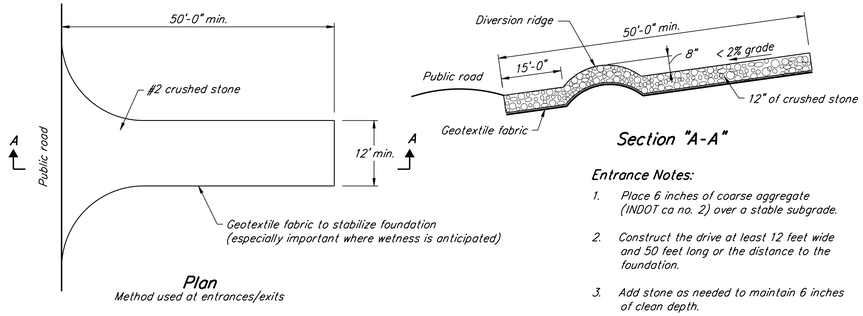

Plan
Method used at entrances/exits

Section "A-A"

Entrance Notes:
1. Place 6 inches of coarse aggregate (INDOT ca no. 2) over a stable subgrade.
2. Construct the drive at least 12 feet wide and 50 feet long or the distance to the foundation.
3. Add stone as needed to maintain 6 inches of clean depth.
4. To improve stability or if wet conditions are anticipated, place geotextile fabric on the graded foundation.

CONSTRUCTION GRAVEL ENTRANCE
Not To Scale

DAVID M. BUCK REGISTERED No. 10001191 STATE OF INDIANA PROFESSIONAL ENGINEER

CITY OF WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Erosion Control Details

RECOMMENDED FOR APPROVAL — CITY ENGINEER — 01/01/10 DATE

Date:	Jan. 2010	Sheet	16 of 18

Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R516

Notes:

Prune the treet at planting only to remove crossover limbs and broken or dead branches.

Stake trees only upon the approval of the landscape architect see staking detail.

Remove all tags, tape, and twine from the above-ground portion of the tree.

For dimensions of planting areas, types of soil amendments, or soil replacement, see "Soil Improvement Details."

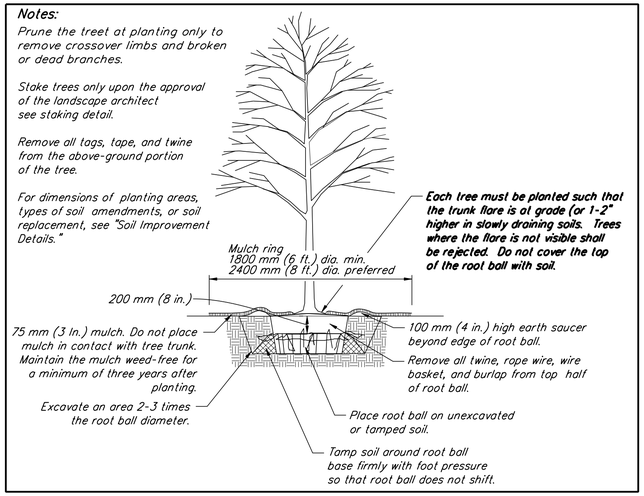

TREE PLANTING DETAIL FOR B&B IN ALL SOIL TYPES

Notes:

Staking and guying material is to be ¾" wide, flat woven, polypropylene material. 900 lb. break strength. Fasten to stakes in a manner which permits tree movement and supports the tree.

Stake only when needed, i.e., evergreens or windy site or sandy soil or tree is crown-heavy.

All stakes shall be driven outside the edge of the root ball. The first stake shall be directly southwest of the tree trunk.

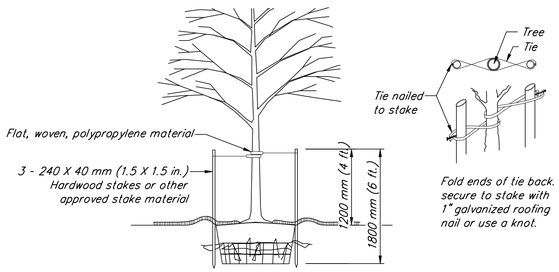

TREE STAKING DETAIL, TREES 3" CALIPER OR LESS

Not To Scale

Knot instructions

The guying knot expands to allow for girdle free growth.

Typical guying using tie

Step 1
Tie a simple knot 18"-24" (depending on the diameter of tree) from either end of the tie.

This end wrapped around tree after knot is tightened

Step 2
Wrap this end around tree. Begin a new knot below the knot that was tied in step 1.

Step 3
Follow motion of tie as shown, finishing the knot by pulling tightly on points A and B at the same time.

This end to stake

Step 4
Slide knot just completed up to the knot tied in step 1. Fasten free end to stake or anchor.

This end to stake

Step 5
The knot provides secure, girdle free attachment of the tie to tree.

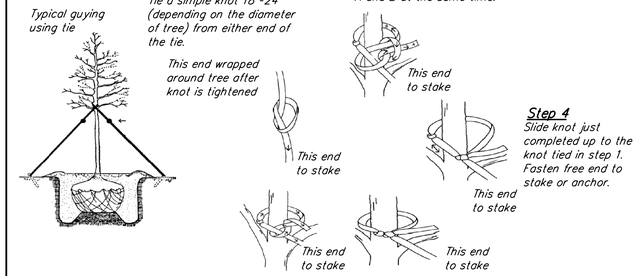

TREE STAKING DETAIL - KNOT TYING INSTRUCTIONS

Not To Scale

Notes:

Staking and guying material is to be (as on Pg. 2)

Stake only when needed, i.e., evergreens or windy site or sandy soil or tree is crown-heavy.

Install three guys per tree, spaced evenly around the trunk.

All stakes shall be driven outside the edge of the root ball.

Remove all staking no later the end of the first full growing season after planting. It shall be the contractor's responsibility to remove staking materials.

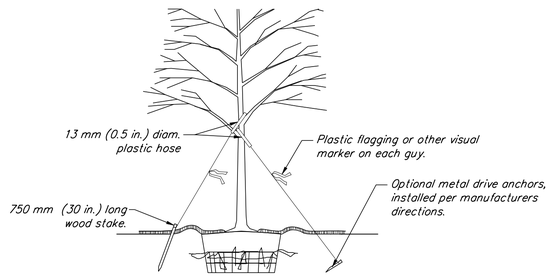

TREE STAKING DETAIL, TREES 3" CALIPER OR LARGER

Not To Scale

Notes:

Loamy soils include the following usda textural classifications and have a clay content of between 15 to 27%: loam, sandy loam and silt loam. Note that soils at the outer limits of the loam classifications may present special planting planting problems not anticipated by this detail.

Loamy soils are defined as granular or blocky friable soils, a mixture of sand, silt and clay particles with a minimum of 1.5% by dry weight organic matter. The soil must not be so compacted as to impede root growth or drainage. The soil structure shall not be platy or massive. The soil must be tested for texture, drainage capability, ph, and nutrient values prior to determining any additional soil improvements.

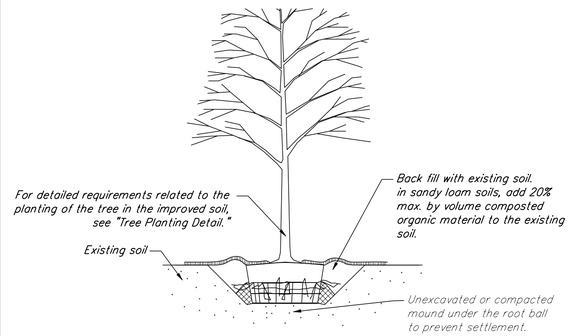

SOIL IMPROVEMENT DETAIL

Not To Scale

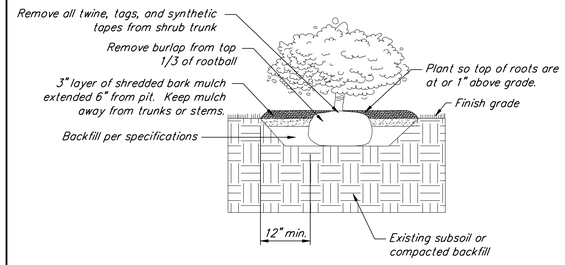

SHRUB DETAIL

Not To Scale

DAVID M. BLOCK REGISTERED No. 10001191 STATE OF INDIANA PROFESSIONAL ENGINEER

CITY OF WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Landscaping Standard Details

RECOMMENDED FOR APPROVAL — CITY ENGINEER — 01/01/10 DATE

Date:	Jan. 2010	Sheet	17 of 18

Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R517

Landscaping Specifications

Part 1 - General

1.01 Description:

This work shall consist of furnishing, transporting, and installing all plants or other materials required for:

1. The establishment of the landscape plantings, including hauling and spreading of topsoil, and finished grading as indicated on the prepared drawings and specified herein.
2. Protection of existing features. During construction, protect all existing trees, shrubs, and other specified vegetation, site features and improvements, structures, and utilities specified herein and/or on submitted drawings. Removal or destruction of existing plantings is prohibited unless specifically authorized by the Greenspace Administrator.

1.02 Applicable Standards:

A. American National Standards for Tree Care Operations, ANSI A300. American National Standards Institute, 11 West 42nd Street, New York, NY 10036.

B. American Standard for Nursery Stock, ANSI Z60.1, American Nursery And Landscape Association, 1250 Eye Street, NW, Suite 500, Washington, D.C. 20005.

C. Hortus Third, The staff of the L.H. Bailey Hortorium. 1976. Macmillan Publishing Co., New York.

D. Tree Manual and Guide to the West Lafayette Landscape Ordinance, revised 03/04.

E. All standards shall include the latest additions and amendments as of the date of advertisement for bids.

1.03 Plan Requirements:

A. On the landscape plan, provide a schedule showing quantity, size, genus, species, variety, and condition (B&B or container) of trees and shrubs indicated, complying with applicable requirements of ANSI Z60.1 American Standard for Nursery Stock. Also show greenspace percentage. Greenspace percentage includes all plant areas interior to the property lines. Not included in greenspace percentage are areas of gravel or stone mulch. The percentage shall be calculated as follows: 100% - impervious surface percentage = greenspace percentage. Greenspace shall be planted with trees, shrubs, groundcover or grass, consistent with good landscape design.

1.04 Quality Assurance:

A. Source quality control:

1. General:
   A certificate of nursery inspection from each state Department of Agriculture from which plants originate and/or a dated, current year Indiana Department of Natural Resources nursery dealer certificate must be available upon request. The nursery must verify whether or not they are under an invasive pest quarantine or other limiting factor from the DNR or the USDA. All plant material shipped from nursery vendors subject to quarantines must be accompanied by a Certificate of Compliance. To determine if vendors are subject to quarantines, call the DNR Supervisor of Plant Regulatory Services.
2. Inspection:
   The Greenspace Administrator may inspect trees and shrubs either at place of growth or at site before planting, for compliance with requirements for genus, species, variety, size, and quality. Greenspace Administrator retains the right to further inspect trees and shrubs for size and condition of balls and root systems, insects, injuries and latent defects, and to reject unsatisfactory or defective material at any time during progress of work. Remove rejected trees or shrubs immediately from project site.

1.05 Delivery, Storage, And Handling:

A. Sod:
   Harvest, deliver, store, and handle sod according to the requirements of the American Sod Producers Association's (ASPA) "specifications for turfgrass sod materials and transplanting/installing."

B. Trees And Shrubs:
   Do not prune before delivery. Protect bark, branches, and root systems from sun-scald, drying, sweating, whipping, and other handling and tying damage. Do not bend or bind-tie trees or shrubs in such a manner as to destroy natural shape. Provide protective covering during delivery. Do not drop trees and shrubs during delivery.

C. Handle Balled And Burlapped And Container Stock By The Root Ball.

D. Deliver trees, shrubs, groundcovers, and plants after preparations for planting have been completed and install immediately. If planting is delayed more than 6 hours after delivery, set planting materials in shade, protect from weather and mechanical damage, and keep roots moist. Set balled stock on ground and cover ball with soil, peat moss, sawdust, or other acceptable material.

1.06 Project Conditions:

A. Utilities:
   Determine location of above grade and underground utilities and perform work in a manner which will avoid damage. Call Indiana Underground at 1-800-382-5544, per Indiana State Law is-69-1991, it is against the law to excavate without notifying the underground location service two working days before commencing work.

B. When conditions detrimental to plant growth are encountered, such as rubble fill, adverse drainage conditions, or obstructions, notify greenspace administrator before planting.

1.07 Coordination And Scheduling:

A. Planting Time:
   Proceed with and complete landscape work as rapidly as portions of site become available, working within seasonal limitations for each kind of landscape work required. Plant or install materials only when ground and backfill is not frozen.

B. Plant trees and shrubs after final grades are established.

Part 2 - Products

2.01 Plants

A. Plants shall be true to species and variety specified and nursery-grown in accordance with good horticultural practices under climatic conditions similar to those in the locality of the project for at least two years. They shall have been freshly dug (during the most recent favorable harvest season).

1. All plant names and descriptions shall be as defined in Hortus Third.
2. All plants shall be grown and harvested in accordance with the American Standard for Nursery Stock.

B. Unless specifically noted, all plants shall be of specimen quality, heavy, symmetrical, and superior in form, compactness and symmetry. They shall be sound, healthy, vigorous, well branched, and densely foliated when in leaf; free of disease and insects, eggs, or larvae; and shall have healthy, well-developed root systems. They shall be free from physical damage or other conditions that would prevent vigorous growth.

1. Trees with multiple leaders, unless specified, will be rejected. Trees with a damaged or crooked leader, bark abrasions, sun-scald, disfiguring knots, insect damage, or cuts of limbs over 1 in. (20 mm) in diameter that are not completely closed will be rejected.

C. Plants Shall Conform To The Measurements Specified, Except That Plants Larger Than Those Specified May Be Used If Approved By The Greenspace Administrator. If Larger Plants Are Approved, The Root Ball Shall Be Increased In Proportion To The Size Of The Plant.

1. Caliper measurements shall be taken on the trunk 6 in. (150 mm) above the natural ground line for trees up to and including 4 in. (100 mm) in caliper, and 12 in. (300 mm) above the natural ground line for trees over 4 in. (100 mm) in caliper. Height and spread dimensions specified refer to the main body of the plant and not from branch tip to branch tip. If a range of sizes is given, no plant shall be less than the minimum size specified. Plants that meet measurements but do not possess a standard relationship between height and spread, according to the American Standard for Nursery Stock, shall be rejected.

D. Substitutions of plant materials will not be permitted unless authorized in writing by the Greenspace Administrator. If proof is submitted in writing that a plant specified is not obtainable, consideration will be given to the nearest available size or similar variety.

E. The contractor shall ensure that all plant materials shown on the drawings are included in his or her bid,

F. Balled and burlapped (B&B) plant materials shall be properly sug with firm, natural balls of soil retaining as many fibrous roots as possible, in sizes and shapes as specified in the American Standard for Nursery Stock. Balls shall be firmly wrapped with nonsynthetic, degradable burlap and secured with nails and heavy, nonsynthetic, degradable twine.

1. The root flare shall be apparent at surface of ball. Trees with loose, broken, processed, or manufactured root balls will not be acceptable, except with special written approval before planting. The plant was planted too deep if you see the root flare deeper inside the ball with most of the roots near the bottom of the ball. If the uppermost roots are more than 4 inches below the top of the soil ball, the plant will be rejected.
2. Plants must have a balanced root system that is well distributed and not one-sided, circling or girdling. Buds on plants (if visible) should be full, moist, and green inside when split apart.
3. Trees must have a defined central leader with a minimum of eight branches radiating to all sides of the tree. The tree is acceptable if it can be pruned to a center leader.

G. Container Plants

1. Plants grown in containers shall be of appropriate size for the container as specified in the most recent Edition of the American Standard for Nursery Stock and be free of circling roots on the exterior and interior of the root ball.
2. Container plants shall have been grown in the container long enough to have established roots throughout the growing medium.
3. The root flare shall be apparent at surface of container grown stock.

H. Mechanized Tree Spade Requirements:

1. Trees may be moved and planted with an approved mechanical tree spade. The tree spade shall move trees limited to the maximum size for a similar B&B root-ball diameter according to the American Standard for Nursery Stock or the manufacturer's maximum size recommendation for the tree spade being used, whichever is smaller.

I. Label all trees and shrubs of each variety, size and caliper with a securely attached, waterproof tag bearing legible designation of botanical and common name.

2.02 Shade And Flowering Trees:

A. Shade trees: single-stem trees with straight trunk, well-balanced crown, and intact leader, of height and caliper indicated, conforming to ANSI Z60.1 for type of trees required.

B. Provide balled and burlapped trees.

1. Container-grown deciduous flowering trees will be acceptable in lieu of balled and burlapped deciduous trees subject to meeting ANSI Z60.1 limitations for container stock.

2.03 Deciduous Shrubs:

A. Form and size: deciduous shrubs with not less than the minimum number of canes required by and measured according to ANSI Z60.1 for type, shape, and height of shrub.

B. Provide balled and burlapped deciduous shrubs.

1. Container-grown deciduous shrubs will be acceptable in lieu of balled and burlapped deciduous shrubs subject to meeting ANSI Z60.1 limitations for container stock.

2.04 Groundcovers And Herbaceous Plants

A. Provide groundcovers and herbaceous plants established and well rooted in removable containers or integral peat pots and with not less than the minimum number and length of runners required by ANSI Z60.1 for the pot size indicated.

2.05 Grass Materials:

A. Sod:
   Certified turfgrass sod complying with ASPA Specifications for machine-cut thickness, size, strength, moisture content, and mowed height, and free of weeds and undesirable native grasses. Provide viable sod of uniform density, color, and texture, strongly rooted, and capable of vigorous growth and development when planted.

B. Seed:
   Seed mixture "R" as described in Section 621.06 of the 1999 INDOT Standard Specifications Section 621.06 (A).

C. Mulch:
   Mulch Method A Or B as described in Section 621.05 of 1999 INDOT Standard Specifications and Section 621.05 (C).

2.06 Fill Material:

A. Satisfactory fill materials: ASTMD 2487 Soil Classification Groups GW, GP, GM, SW, SP And SM; free of Rock or gravel larger than 2 inches (50 mm)in any dimension, debris, water, frozen materials, vegetation and other deleterious matter.

B. Topsoil:
   Provide topsoil that is fertile, friable, natural loam, surface soil, reasonably free of subsoil, clay, limps, brush, weeds and other litter, and free of roots, stumps, stones larger than 1 inch in any direction, and other extraneous or toxic matter harmful to plant growth. Topsoil shall contain a minimum two percent (2%) organic matter.

The use of on-site native topsoil is encouraged, provided it weets the standard and can be modified to meet the requirements set out or specified for growing medium. Amended subsoil may be considered for use, provided that; additional organic matter is available, the soil structure is acceptable, and a soil test performed on the amended product prior to placement indicates the soil meets standard growing requirements.

2.07 Mulches:

A. Mulch shall be organic mulch, free from deleterious materials and suitable as a top dressing of trees and shrubs, consisting of shredded hardwood bark.

2.08 Stakes And Guys:

A. Upright and guy stakes: rough-sawn, sound, new hardwood, redwood, or pressure-preservative-treated softwood, free of knots, holes, cross grain, and other defects, 2 by 2 inches (50 by 50 mm) by length indicated, pointed at one end.

B. Wide webbing strap: polypropylene, woven, reinforced straps, 3/4" wide, 900 lb. breaking strength.

Part 3 - Execution

3.01 Preservation

A. Protect existing trees that are to be saved by erecting construction fence around these trees before any site work begins. Place fencing at least at the dripline of the tree. The fenced area is to be kept clear of building materials, waste and excess soil. No digging, trenching, compaction or other soil disturbance is allowed in the fenced area.

3.02 Groundcover And Perennial Plant Bed Preparation:

A. Till soil in beds to a minimum depth of 8 inches (200 mm).

3.03 Excavation For Trees And Shrubs:

A. Pits and trenches: excavate with vertical sides and with bottom of excavation slightly raised at center to assist drainage. Loosen hard subsoil in bottom of excavation. For tree pit or parking lot island backfill, remove all compacted soil and aggregate base (or other materials or construction debris detrimental to optimal plant growth). Replace with topsoil as defined in these Specifications to a depth of 3".

1. Balled and burlapped trees and shrubs: excavate approximately 2 times as wide as ball diameter and equal to ball depth.
2. Container-grown shrubs: excavate to container width and depth.

B. Dispose of subsoil removed from landscape excavations. Do not mix with planting soil or use as backfill.

C. Obstructions: notify Greenspace Administrator if unexpected rock or obstructions detrimental to trees or shrubs are encountered in excavations.

1. Hardpan Layer:
   Drill 6 inch (150 mm) diameter holes into free-draining strata or to a depth of 10 feet (3 m), whichever is less, and backfill with free-draining material.

D. Drainage:
   Notify greenspace administrator if subsoil conditions evidence unexpected water seepage or retention in tree or shrub pits.

1. Greenspace Administrator has the option to require the installation of 8" drainage pits at the bottom of the ball excavation to facilitate drainage. Use an 8" auger to dig 36" deep pit. Fill pit with washed drainage fill.
2. Remove and dispose of rock material and obstructions encountered.

3.04 Planting Trees And Shrubs:

A. Set balled and burlapped stock plumb and in center of pit or trench with top of ball raised above adjacent finish grades as indicated.

1. Place stock on layer of compacted planting soil.
2. Remove burlap from tops of balls and partially from sides, but do not remove from under balls. Remove the top third of wire baskets. Do not use planting stock if ball is cracked or broken before or during planting operation. Remove all twine, rope and wire from the trunk and rootball.
3. **Each tree must be planted such that the root flare is visible at the top of the root ball. Trees where the root flare is not visible shall be rejected. Do not cover the top of the root ball with soil. In cases where the root flare is not visible, consult with Greenspace Administrator rrior to planting. The Greenspace Administrator may request contractor to shove the soil from top of root ball below root flare. The Greenspace Administrator may reject the tree pending the condition of root ball and tree.**
4. Place backfill around ball in layers, tamping to settle backfill and eliminate voids and air pockets. When pit is approximately 1/2 backfilled, water thoroughly before placing remainder of backfill. Repeat watering until no more is absorbed. Water again after placing and tamping final layer of backfill.

B. Set container-grown stock plumb and in center of pit or trench with top of ball raised above adjacent finish grades as indicated.

1. Carefully remove containers so as not to damage root balls.
2. Place backfill around ball in layers, tamping to settle backfill and eliminate voids and air pockets. When pit is approximately 1/2 backfilled, water thoroughly before placing remainder of backfill. Repeat watering until no more is absorbed. Water again after placing and tamping final layer of backfill. Do not cover top of root ball with backfill.

3.05 Tree And Shrub Guy Staking:

A. Upright staking and tying:
   Stake trees of less than 2 inch (50 mm) caliper only as required to prevent wind tip-out. Use a minimum of 2 stakes of length required to penetrate at least 18 inches (450 mm) below bottom of backfilled excavation and to extend at least 73 inches (1800 mm) above grade. Set vertical stakes and spoce to avoid penetrating balls or root masses. Support trees with 2 strips of web straps at tree trunk.

B. Guying And Staking:
   Guy and stake trees exceeding 14 feet (4.2 m) and more than 3 inch (75 mm) caliper only to prevent tipping unless otherwise indicated. Securely attach no fewer than 3 guys to stakes 30 inches (760 mm) long, driven to grade. Attach flags to each guy wire, 30 inches (760 mm) above finish grade.

3.06 Planting Groundcover And Herbaceous Plant Material:

A. Space groundcover and plants as indicated.

B. Dig holes large enough to allow spreading of roots, and backfill with planting soil. Work soil around roots to eliminate air pockets. Do not cover plant crowns with soil. Water thoroughly after planting.

3.07 Fill:

A. Preparation: remove vegetation, topsoil, debris, wet and unsatisfactory soil materials, obstructions, and deleterious materials from ground surface prior to placing fills.

B. When subgrade or existing ground surface to receive fill has a density less than that required for fill, break up ground surface to depth required, pulverize, moisture-condition or aerate soil and recompact to required density.

C. Place backfill and fill materials evenly on all sides of structures to required elevations. Place backfill and fill uniformly along the full length of each structure.

3.08 Grading:

A. General:
   Uniformly grade areas to a smooth surface, free from irregular surface changes. Comply cith compact requirements and grade to cross sections, lines, and elevations indicated.

1. Provide a smooth transition between existing adjocent grades and new grades.
2. Cut out soft spots, fill low spots, and trim high spots to conform to required surface tolerances.

B. Site grading: slope grades to prevent ponding. Finish subgrades to required elevations within 1/2"

3.09 Final Grading And Placement Of Topsoil:

A. Loosen subgrade and lawn area to a minimum depth of 4 inches. Remove stones measuring over 1-1.2 inches in any dimension. Remove sticks, roots, rubbish, and other extraneous matter. Limit preparation to areas which will be planted promptly after preparation.

1. Spread topsoil to minimum depth required to meet lines, grades, and elevations shown, after light rolling and natural settlement. Minimum depth of topsoil shall be 4 inches unless otherwise indicated. In tree and shrub planting areas there shall be 18"-24" topsoil. In islands, depth of topsoil shall be 36". Around the plant, at least in an area equal to the plants' mature canopy size.
2. Place approximately 1/2 of total amount of topsoil required. Work into top of loosened subgrade to create a transition layer and then place remainder of topsoil.

3.10 Reconditioning Lawn And Seeding Of Berms:

A. Recondition existing lawn areas or other Contractor's work damaged by operations, including storage of materials or equipment and movement of vehicles.

B. Remove sod and vegetation from damaged lawn areas; do not bury into soil. Remove topsoil containing foreign materials resulting from Contractor's operations, including oil drippings, fuel spills, stone, gravel, and other construction materials, and replace with new topsoil.

C. Where substantial lawn remains, mow, dethatch, core aerate, and rake. Remove weeds before seeding. where weeds are extensive, apply selective herbicides as required. Do not use pre-emergence herbicides.

D. Remove waste and foreign materials, including weeds, soil cores, grass, vegetation, and turf, and legally dispose of it off the Owner's property.

E. Till stripped, bore, and compacted areas thoroughly to a depth of 6 inches (150 mm).

F. Apply initial fertilizers and mix thoroughly into top 4 inches (1000 mm) of soil. Fertilizer shall provide 1 lb. per 1,000 sq. ft. of actual nitrogen, 4 percent (4%) phosphorous, and 2 percent (2%) potassium by weight. Provide new planting soil as required to fill low spots and meet new finish grades.

G. Apply sod, or seed and mulch as stated in section 621.05 and 621.06 of the 1999 INDOT Standard Specifications.

H. Water newly planted areas and keep moist until new grass is established.

3.11 Mulching:

A. Mulch backfilled surfaces of pits, trenches, planted areas, and other areas indicated with a 3" (75 mm) thick layer of organic mulch and finish level with adjocent finish grades. Do not place mulch against trunks or stems.

3.12 Cleanup

A. During landscaping, keep pavements clean, sidewalks and public right of way clear and work area in an orderly condition.

3.13 Disposal Of Surplus And Waste Materials:

A. Disposal: remove surplus soil and waste material, including excess subsoil, unsuitable soil, trash and debris, and legally dispose of it off the Owner's property.

Part 4- Warranty And Maintenance

4.01 Warranty

A. Remove and replace dead planting materials immediately unless required to plant in the succeeding planting season. Replace planting materials that are more than 25 percent (25%) dead or in an unhealthy condition at end of warranty period.

4.02 Tree And Shrub Maintenance

A. Property owners have the following responsibilities for shrubs or trees planted in or near the public parkway:

1. No property owner shall permit limbs or branches obstructing movement or vision of vehicles or pedestrians along streets, alleys or sidewalks in the city. Except for work necessitated by storms or other emergencies, a permit shall be obtained before any person may remove or cut any trees upon the public parkway within the city. A permit shall be issued or denied without charge by the Greenspace Administrator within eight days of the application.
2. Should the condition of any plant material not be reversible, the owner shall replace the tree or plant materials with acceptable trees (from the accepted shade tree list) or plants as applicable, or equivalent trees as specified by the Greenspace Administrator.
3. Off-street parking areas require a screening area between the Right-of-Way and the parking area planted with shrubs. The shrubs shall be allowed to grow so that they form a continuous tight screen at mature growth at 30-48" in height. Within the twenty-five foot vision triangle at entrances to and exits from parking lots, vision shall be clear between two and one-half feet and eight feet in height.
   For this purpose, the screen height may be reduced to between 18-30".
4. Any trees required by the landscape plan shall be maintained in good condition so as to present a healthy, neat and orderly appearance, maintaining the tree's natural shape and crown-excessive pruning or topping are not acceptable or approved practices.
   Tree topping shall be unlawful as a normal practice by a person, firm or city Department to any street tree, park tree, other tree on public property or trees required by the landscape plan.
5. All plant materials shall be kept free from refuse and debris.

DAVID M. BLOCK
REGISTERED
No. 10001191
STATE OF INDIANA
PROFESSIONAL ENGINEER

CITY OF WEST LAFAYETTE

City Hall, 609 West Navajo
West Lafayette, IN 47906

Landscaping Specifications

RECOMMENDED FOR APPROVAL _____ 01/01/10
CITY ENGINEER DATE

Date: Jan. 2010	Sheet 18 of 18
Holey Moley	(800) 382-5544
City Engineer	(765) 775-5130
Public Works Department	(765) 775-5145
Development Department	(765) 775-5160
Fire Department	(765) 775-5175
Police Department	(765) 775-5200

Project Name	Sheet Number
	R518

PRELIMINARY PLAN

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

PLANNED DEVELOPMENT (CBW TO PDMX)

A PART OF THE NORTHEAST QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

CONDITIONALLY APPROVED
PRELIM. PLANNED DEVEL.
PRES.
SEC
DATE 2.19.14

VICINITY MAP

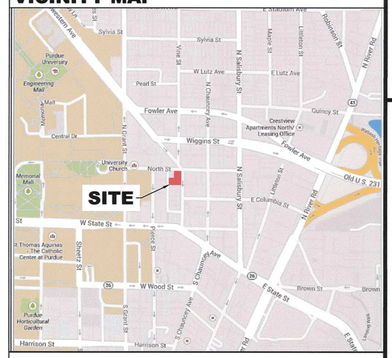

ZONING MAP

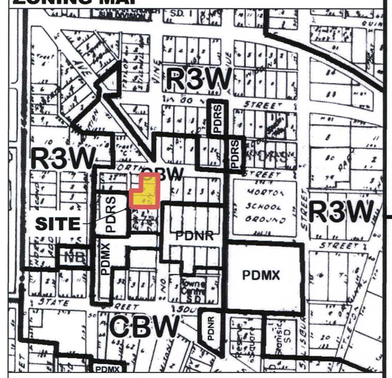

CONTACT INFORMATION

Developer

Golden Paws Investments, LLC
711 South 9th Street, Suite 1
Lafayette, IN 47905
(765) 423-1515

Tippecanoe County Area Plan Commission

Tippecanoe County Office Building
20 North 3rd Street
Lafayette, IN 47901
765-423-9242

West Lafayette Engineering Department

Dave Buck, City Engineer
West Lafayette City Engineer's Office
City Hall
609 West Navajo Street
West Lafayette, IN 47906
(765) 775-5130

Engineer/Surveyor

TBIRD Design Services Corporation
105 North 10th Street
Lafayette, IN 47901
Phone: 765-742-1900
Fax: 765-742-1905

SHEET INDEX

1	TITLE SHEET
2	NARRATIVE
3	ZONING
4	SITE ANALYSIS
5	SITE UTILITY PLAN
6	PRELIMINARY PLAT
7	MAINTENANCE OF TRAFFIC PLAN
A100	ARCHITECTURAL SITE PLAN
A101	LANDSCAPING PLAN
A105 - A107	FLOOR PLANS
A110	UNIT PLANS
A200 - A201	EXTERIOR ELEVATIONS
E100	LIGHTING PLAN
E101	LIGHTING CUTSHEETS

TBIRD
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th STREET • LAFAYETTE, INDIANA
phone: (765) 742-1900 • fax: (765) 742-1905
www.tbirddesign.com

CERTIFIED BY:

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION

PROJECT NO:	13080
FILE:	13080-GENERAL.DWG
DRAWN BY:	JRF
CHECKED BY:	TRB

LOCATION:

A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:

TITLE SHEET

1

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\PRELIMINARY PLAN\13080-GENERAL.dwg - USER: DAVID PERRINE - DATE: Friday, January 24, 2014 11:51:05 AM

NARRATIVE
For
225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

A Mixed Use Development (CBW to PDMX)
Z-2562
City of West Lafayette, IN
Near the Purdue University Campus

By

Petitioner:
Golden Paws Investments, LLC

Contact(s): Alan White
711 S. 9th St., Suite 1
Lafayette, IN 47905
(765) 423-1515

January 21, 2014

Consultant/Design Team:

Legal: Daniel Teder – Law firm of Reiling Teder & Schrier
Architect: Kelly J. Good, AIA – KJG Architecture, Inc.
Engineer: Tim Balensiefer – TBIRD Design Services
Surveyor: Justin Frazier, PE, PLS – TBIRD Design Services

Planned Development ("PD") Narrative
225 Northwestern Avenue

Project Overview & Timeline

The "**225 Northwestern Avenue PD**" is a proposed redevelopment of the south-west corner of Northwestern Avenue and North Street in West Lafayette, Indiana (the "Project").

The Project consists of a mixed-use development with commercial/retail space and multifamily units. The building shall be five (5) stories in height (the "Building").

All resident apartment units ("Apartments") shall be limited in occupancy to one (1) occupant per bedroom. The Petitioner's unit mix for the Apartments is as follows:

(4) Three-bedroom units
(4) Two-bedroom units
(36) One-bedroom units

Total = 44 units (56 beds)

A majority of the Apartments shall be furnished which shall include, but not be limited to, beds, dressers, couches, televisions and appliances.

The area of commercial rentable square feet and number of tenants per floor are as follows:

First Floor (rentable square footage) = 5,200 S.F. MAX
Maximum number of tenants shall not exceed three (3) tenants

Existing Conditions and Zoning History

The "**225 Northwestern Avenue PD**" will redevelop Lots 9, 10 and 11 in Andrew's Addition to the Town of Chauncey, now 225 Northwestern Avenue in West Lafayette, Indiana ("Property"). A single-story CMU (concrete block) building with a flat roof is currently located on the Property with a liquor store tenant occupying the building. The Property is currently zoned CBW.

Building and Architectural Information

On the front and sides of the Building, the façade will incorporate a combination of limestone and brick masonry to match other key buildings in the West Lafayette Village area and Purdue's campus. The northeast corner of the Building is designed to wrap the retail around the ground floor of the development while providing distinctive architectural feature and design for the Building and apartments above. The east entrance to the apartments are located midway between the Building. On the rear alley side, the façade will use a combination of brick veneer and fiber cement horizontal siding to provide an economical yet visually appealing look that mimics other buildings which utilize the alley. The Building's roof will be a sloped roof with architectural shingles. This design will help the Building

blend into the commercial block along the west side of Northwestern Avenue. The building elevations are depicted on the drawings ("Elevations") prepared by KJG Architecture, Inc ("KJG"). The Elevations shall be part of the Preliminary Plan. All signage will be proportional to the Building façade and Building height at which it is mounted as shown in the Elevations.

The Petitioner shall install cloth/vinyl awnings as shown on the Exterior Elevations. The colors of the awnings shall be the same for all awnings. The color and future color changes for the awnings shall be approved by the Administrative Officer. Outside seating for eating and drinking establishments, together with landscaping plantings shall be permitted along Northwestern Avenue as shown in the Elevations.

Traffic

Pedestrian access for retail tenants of the Project will be along Northwestern Avenue. The pedestrian access to the apartments of the Project shall be on Northwestern Avenue and along the west side of the Building off North Street. The apartment entrance facing the alley is a convenience to the apartment dwellers using the parking lot. Both the east and west entrance to the apartments have elevator access. Vehicular access shall occur in two locations. The parking behind and under the Building shall be accessed from North Street using the one-way drive and exiting onto the alley to the west. Limited vehicular access shall be provided from the alley to the parking lot.

Key fobs will restrict the public from gaining access to the stair and elevator lobby of the apartments. Resident access to floors 2-5 shall be restricted via key fob at the lobby on the first floor. The elevator will require key-fob access to go to floors 2-5.

Commercial loading/unloading shall occur along North Street in dedicated loading spaces being created as shown on the Elevations. There shall be no loading, unloading or parking in the alley except for trash disposal. Furnished Apartments will minimize the loading/unloading impact of move-in day loading. The west lobby entrance to the apartments will be six (6) feet in width to accommodate move-in day loading for the apartment tenants.

Trash Collection and Pickup

Trash collection for on-site trash generation shall be achieved with the use of up to two (2) front-load dumpsters located in the dumpster enclosure along the alley. The enclosure has been sized to allow up to (2) 6-yard dumpsters, but the actual size of the dumpsters used shall be determined by the frequency of pick-ups and the type of commercial tenant that is located in the first floor space. The enclosure shall have metal gates to limit the exposure of the dumpsters by pedestrians and adjacent properties from ground level.

Trash collection shall be weekly or more often, as needed, by a waste collection service. No dumpsters shall be located in the alley itself except during the time of trash pickup.

Landscaping

The existing Property contains only five (5) trees. Two (2) are located in tree wells along Northwestern Avenue and three (3) are located in a landscaping bed along North Street Two of the North Street trees are recent plantings of ½" caliper or smaller saplings. The proposed landscaping plan will increase the number of trees and tree wells along Northwestern Avenue. In addition, trees and shrubs on the west side of the Property between the Building and the alley will improve the quality of the proposed parking area and buffer the adjacent properties from the parked cars. The specific species and location of all shrubs, plants and trees are shown on the Landscaping Plan.

Streetscape including public bike loops and trash containers shall be provided as recommended and approved by the Administrative Officer. Designs showing quantity, specification, and location of streetscape elements, including outdoor plantings and benches, are shown on the Landscaping Plan. (The Architectural Site Plan will provide two types of streetscape elements; one for retail tenants and one for restaurant tenants.)

Parking

Parking for the 225 Northwestern Avenue PD will be accommodated with a combination of on-site parking, assigned parking, and a parking license agreement with a property owner in the West Lafayette Village area. Handicap accessible parking for the on-site parking shall be provided. **24 parking spaces** are being provided on-site and an additional **10 off-site parking** spaces are reserved in the West Lafayette Public Library ("Library") parking garage pursuant to a parking agreement ("Parking Agreement") between Petitioner and the Library. One (1) space for each commercial tenant will be available and twenty-two (22) on-site parking spaces will be assigned to specific apartment units. Each of the four (4) 3-bedroom and the four (4) 2-bedroom units shall be assigned one (1) on-site parking space. The remaining 13 to 15 on-site parking spaces shall be assigned to one-bedroom units. Ten (10) of the one-bedrooms shall be assigned to the Library spaces. The remaining 13 to 15 one-bedroom units without an on-site or Library parking space shall have a lease restriction stating no parking on site. The required West Lafayette rental certificate shall permit West Lafayette to review the tenant leases for this lease restriction. The Parking Agreement spaces shall be reserved for use solely by the residents of the 225 Northwestern Avenue PD. The Parking Agreement shall be for a term of five (5) years which shall automatically renew for successive five (5) year periods subject to a minor modification as hereinafter stated. Petitioner shall have the right to terminate the Parking Agreement and enter into a new parking agreement with another property owner in the Village area upon the same or different term of years subject to the written approval of the West Lafayette Administrative Officer which approval shall not be considered a minor modification but subject to the minor modification provisions of UZO. A copy of such written approval shall be furnished to the APC staff. The proposed parking allocation for the PD is summarized and qualified as follows:

24 on-site parking spaces – 21 for apartment residents; 1 per commercial tenant with maximum of 3
10 off-site parking spaces – apartment residents

At the Administrative Officer's approval, the total number of parking spaces required may be reduced as a Minor Modification provided the owner furnishes a parking report that clearly shows the actual number of parking spaces utilized to be less than those provided over a span of time as approved by the Administrative Officer. The number of required parking spaces may also be reduced as a Minor Modification upon the approval of the Administrative Officer if the Unified Zoning Ordinance requirements for parking spaces are reduced below the number of spaces provided for this project.

The redevelopment of the site will generate four (4) additional public parking spaces along Northwestern Avenue.

Signage

Signage for the commercial uses shall be regulated in accordance with the requirements for the CBW zoning district and as shown on the Signage Plan to be included in the Preliminary Plan, including directional signage as follows:

PD Building Signage: The owner of the Property shall be allowed to install the following signage mounted on the Building as shown on the Elevations.

- One (1) sign, integrated into the masonry, located in the cast-stone banding above the metal canopy. The sign shall be constructed of cast stone and shall not be internally illuminated.

Retail Signage: Each retail tenant shall be allowed retail signage up to a maximum of forty (40) square feet per business and up to two (2) separate signs for a retail tenant which has two street frontages as follows:

- Each tenant shall have access to the double-sided internally lit projecting sign as shown on the Exterior Elevations. Each side is 20 square foot per face and is mounted with the bottom no less than 12'-0" above grade.
- Building mounted signage may be mounted above the tenant entrance on the cast-stone band, provided the letters are no taller than 24" tall and the width fits between the steel tie-rods which support the canopies **OR**
- Signage may be mounted on the roof of the metal canopies provided the letters are no taller than 24" tall and the width is no wider than the steel canopy.
- Maximum of ten (10) square feet per tenant for lettering/logos on awnings.
- Neon signs shall be permitted.

- **Exceptions:** Flags, sandwich boards, address and business name plaques, wall mounted cases, window signage and other architectural elements will not be counted against the allowable square footage of Retail Signage.

- **Sandwich Boards:** Movable/collapsible chalkboards typically used to display daily specials of size not to exceed 2.5 feet x 4 feet, or 10 square feet maximum per side. All sandwich boards or other tenant sidewalk uses shall conform in all respects to all rules and regulations of the City of West Lafayette and the State of Indiana, including, but not limited to, ADA requirements.
- **Wall Mounted Case:** Used for menus and/or attractions, not to exceed 2 feet x 3 feet, or 6 square feet total.
- **Window Signage:** Retail tenants shall not be permitted to block more than thirty percent (30%) of any window with signage or other obstructions. Information on the door glazing needed as way-finding, hours of operation, and methods of payment accepted shall not be included in this allowance. Window signage (not blockage) shall be considered temporary signage and requires a temporary sign permit.

- **Prohibited Sign Types:**
  - Back-lit box signs with transparent or translucent faces.
  - Signs with moving or flashing lights (strobes, chasers, LED, etc.).
  - Customizable message board signs, electronic or otherwise, Portable signs.
  - Portable signs.

Lighting

The Project will incorporate wall mounted lighting fixtures along Northwestern Avenue, North Street, and the north alley to adequately light the pedestrian walkway and accent the 1st floor, as well as the upper floor, facades. Additional recessed lighting at the retail entrance on the corner of North Street and Northwestern Avenue shall be provided as shown on the Lighting Plan for the Preliminary Plat. Exterior balconies shall be softly lit with ceiling mounted light fixtures. All lighting will be subject to final review and approval by the Administrative Office with the Final Detailed Plans.

Bicycle Parking

The residents will be allowed to utilize bike parking in the rear of the building under a bicycle parking structure Additional bike loops are provide on North Street and Northwestern Avenue for public temporary bike parking. A total of **(20) bicycle parking spaces** shall be provided with detail shown on the Final Details Plans.

Approved Uses

The uses proposed for the PD commercial space are shown on the attached Table A – "Allowable Uses".

TABLE A – ALLOWABLE USES
State Street Corner PD
Allowed Land Use List by Standard Industrial Classification Code (SIC):

For clarity, the following allowed uses and noted exclusions will be applied to this planned development based upon the associated SIC number as indicated below:

Residential Uses
6513 Multi-family housing

Manufacturing (1), (2)
205 Bakery products
27 Printing and publishing

Transportation and Public Utilities
43 U.S. Postal Service
48 Communications

Retail
523 Paint, glass and wallpaper stores
525 Hardware stores
591 Drug Store and Proprietary Store
53 General merchandise
54 Food stores
56 Apparel and accessory stores
57 Furniture and home furnishings stores
58 Eating and drinking places (3) (4)(5)
59 Miscellaneous retail
591-596, 599

Finance, Insurance, and Real Estate
60 Depository institutions (3)
61 Non-depository institutions (3)
62 Security and commodity brokers
63 Insurance carriers
64 Insurance agents, brokers, and service
65 Real estate
65 Apartment rental office (3)
66 Holding and other investment offices

Services
72 Personal services
73 Business services
76 Miscellaneous repair services
79 Amusement and recreation service (4)
80 Health services

81 Legal services
83 Social services
86 Membership organizations
87 Engineering and management services
89 Services

Public Administration
91 Executive, legislative and general
92 Justice, public order and safety
93 Finance, taxation and monetary policy
94 Administration of human resources
95 Environmental quality and housing
96 Administration of economic programs
97 National security and international affairs, including military recruiting offices

Special Provision: Any use not specifically allowed or prohibited in this section shall be subject to approval by the Administrative Officer as a minor modification.

General Exclusions
Adult entertainment
Car sales
No drive-ins or drive-throughs
No ATM's located on the exterior Building facade

(1) Must have a retail component associated with the manufacturing activity.
(2) No open outdoor storage allowed.
(3) No drive in or drive through permitted.
(4) No "adult entertainment business" activities as defined in the New Unified Zoning Ordinance (NUZO).
(5) Sales of alcoholic beverages consumed on site shall be limited to the hours of 10:00 a.m. to midnight, 7 days a week, except from 7:00 a.m. to 1:00 a.m. for special events, including, but not limited to, football games and holiday special events (holiday special events shall be approved by the Administrative Officer which approval shall not be considered a minor modification). Hours of operation are subject to change with approval of Administrative Officer as a minor modification. This footnote does not apply to hours of operation for a liquor store. State of Indiana rules and regulations define the hours of operation for a liquor store.

TBIRD
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • Lafayette, Indiana
phone: (765) 742-1800 • fax: (765) 742-1805
www.tbirddesign.com

CERTIFIED BY:

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION

PROJECT NO: 13080
FILE: 13080-GENERAL.DWG
DRAWN BY: JRF
CHECKED BY: TRB

LOCATION:
A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:
NARRATIVE

2

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\PRELIMINARY PLAN\13080-GENERAL.dwg - USER: DAVID PERRINE - DATE: Tuesday, January 28, 2014 11:44:56 AM

N

0' 80' 160'

HORIZONTAL SCALE: 1" = 80'

LEGEND

= ZONING BOUNDARY

TBIRD
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th STREET • LAFAYETTE, INDIANA
phone: (765) 742-1905 • fax: (765) 742-1905
www.tbirddesign.com

CERTIFIED BY:

225 NORTHWESTERN AVENUE
PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION

PROJECT NO:	13080
FILE:	13080-ZONING.DWG
DRAWN BY:	JRF
CHECKED BY:	TRB

LOCATION:

A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:

ZONING

3

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\PRELIMINARY PLAN\13080-ZONING.dwg - USER: DAVID PERRINE - DATE: Friday, January 24, 2014 11:51:27 AM

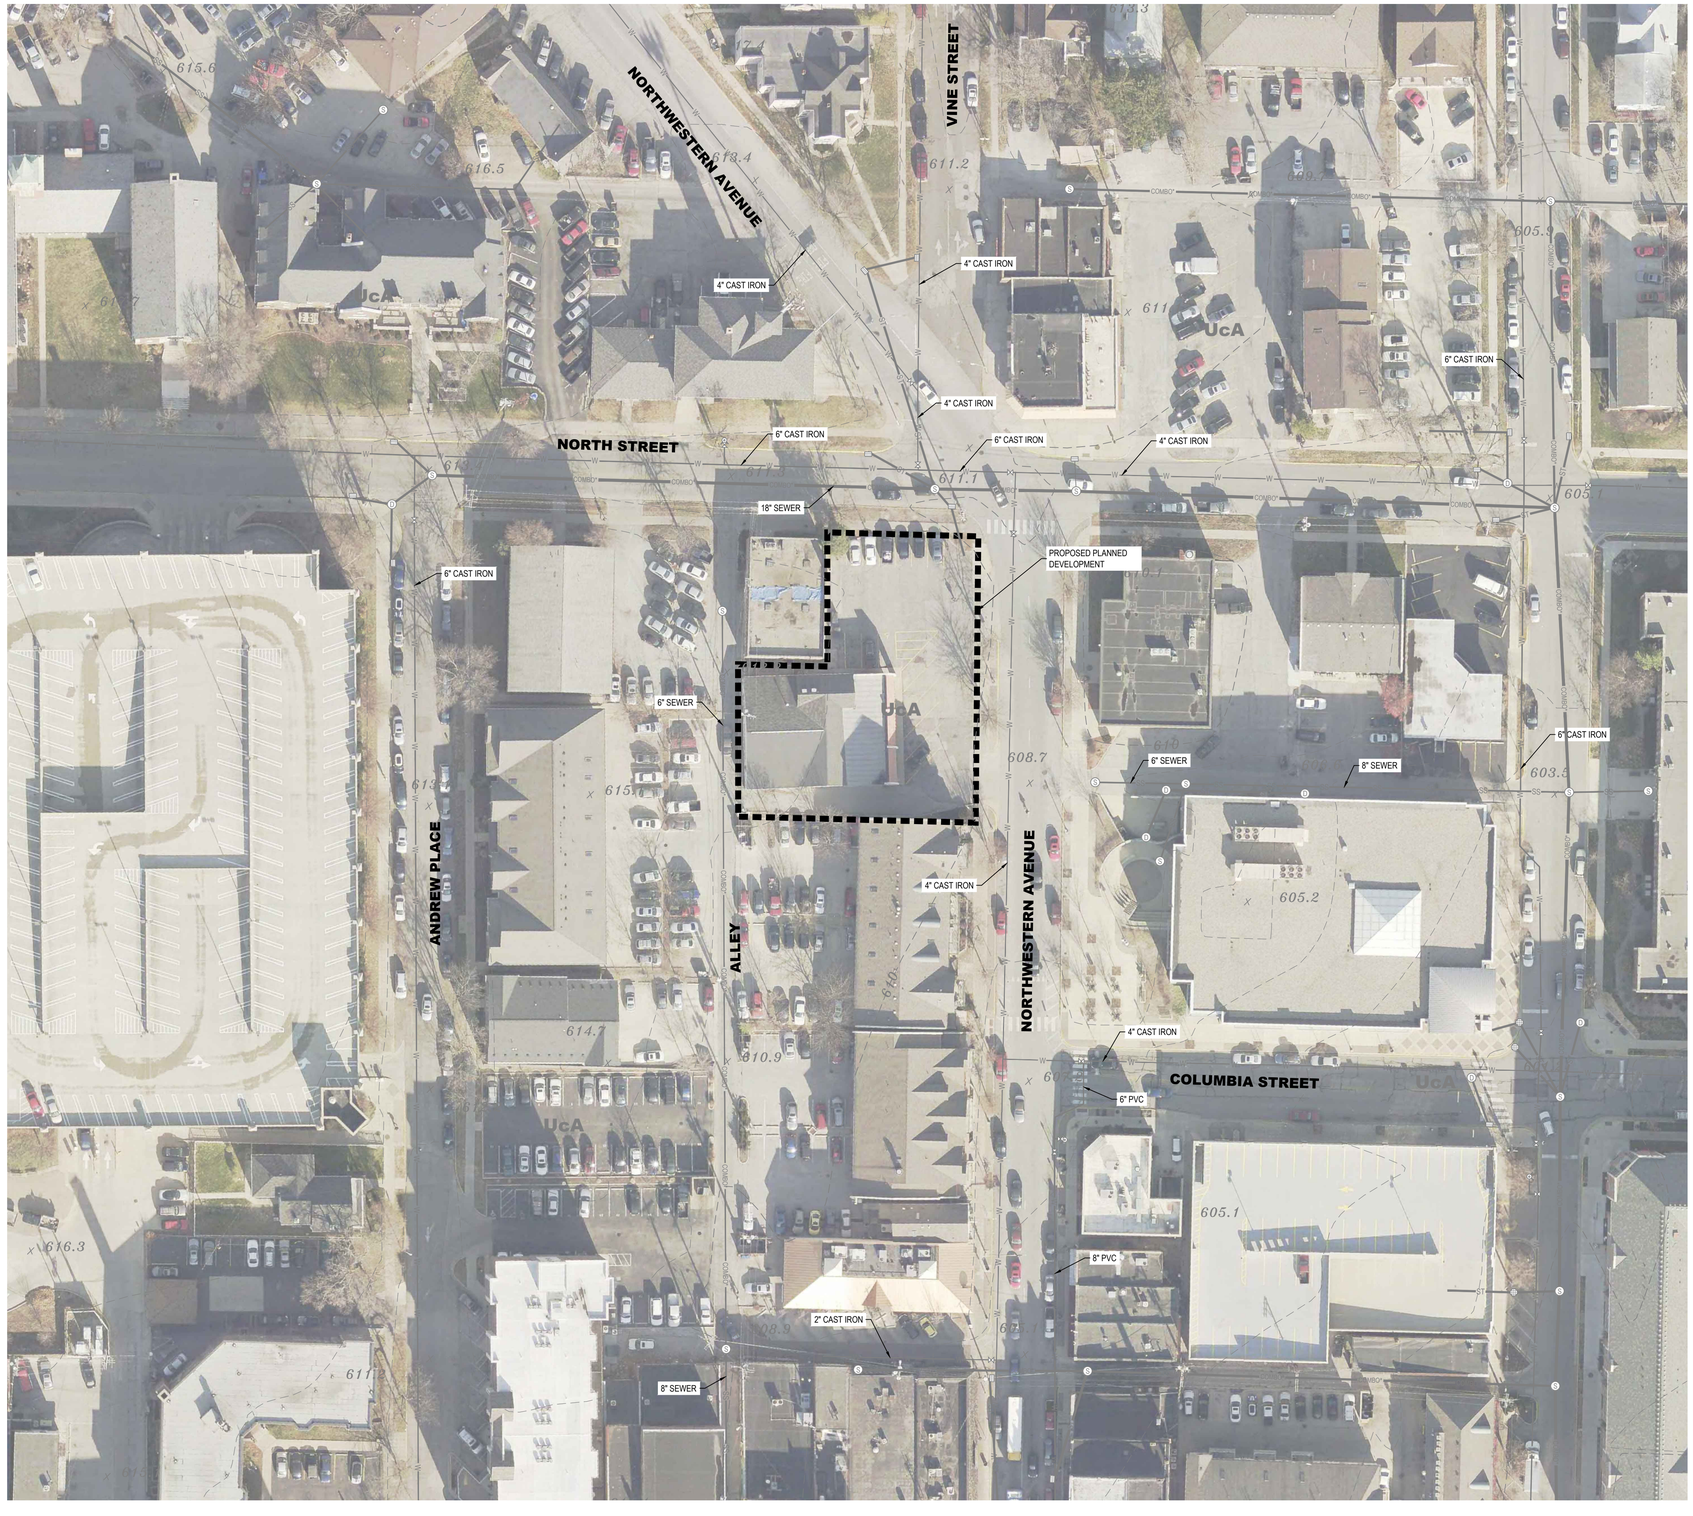

N

0' 40' 80'

HORIZONTAL SCALE: 1" = 40'

LEGEND

- 670 = EXISTING CONTOUR
- x 671.3 = EXISTING SPOT ELEVATION
- = SOIL TYPE BOUNDARY
- ST = EXISTING STORM SEWER
- = EXISTING STORM STRUCTURE
- SS = EXISTING SANITARY SEWER
- COMBO" = EXISTING COMBINATION SEWER
- = EXISTING SANITARY STRUCTURE
- W = EXISTING WATERMAIN

SOILS LEGEND

SOIL	NAME	HYDROLOGIC GROUP
UcA	Urban Land - Carmi Complex	N/A

IBRD
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • Lafayette, Indiana
phone: (765) 742-1800 • fax: (765) 742-1805
www.ibrddesign.com

CERTIFIED BY:

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION

PROJECT NO:	13080
FILE:	13080-SITE ANALYSIS.DWG
DRAWN BY:	JRF
CHECKED BY:	TRB

LOCATION:

A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:

SITE ANALYSIS

4

FILE: P:\2013\13080\225 Northwestern Avenue\DRAWINGS\PLANS\PRELIMINARY PLAN\13080 SITE ANALYSIS.dwg - USER: DAVID PERRINE - DATE: Friday, January 24, 2014 11:51:49 AM

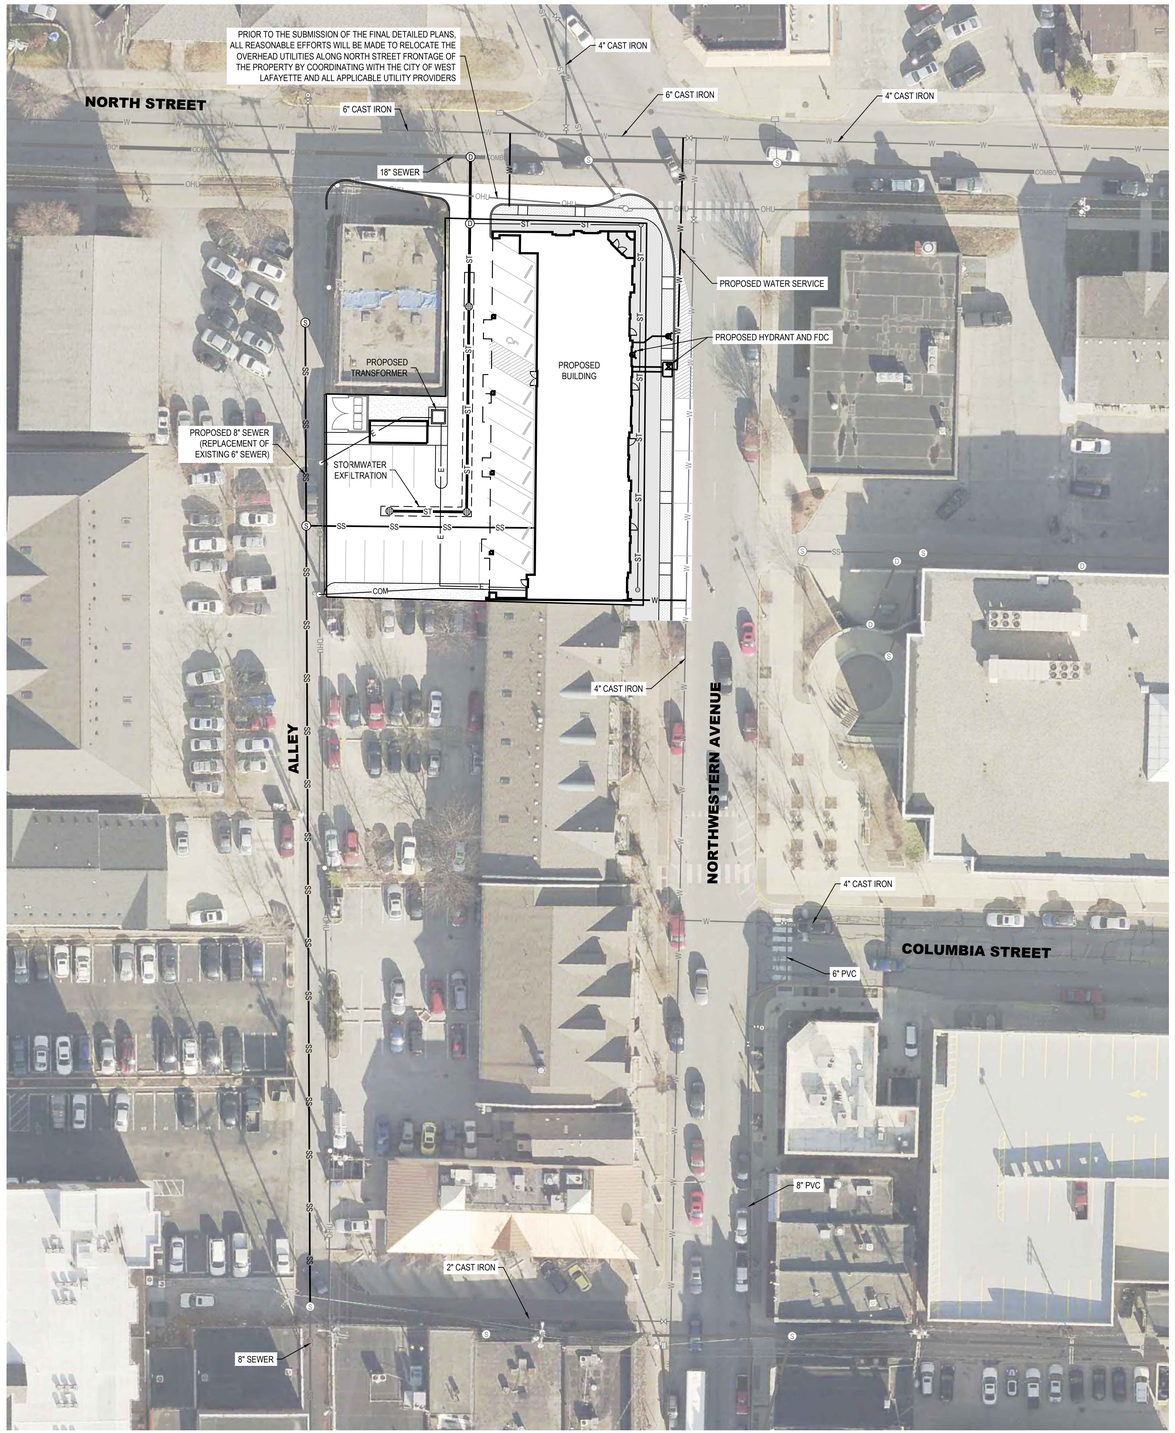



HORIZONTAL SCALE: 1" = 30'

LEGEND

ST	= EXISTING STORM SEWER
ⓒ	= EXISTING STORM STRUCTURE
SS	= EXISTING SANITARY SEWER
Ⓢ	= EXISTING SANITARY STRUCTURE
SS SS	= PROPOSED SANITARY SEWER
W W	= EXISTING WATERMAIN
W W	= PROPOSED WATER SERVICE

IBIED Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th Street • Lafayette, Indiana
phone: (765) 742-1800 • fax: (765) 742-1805
www.ibieddesign.com

CERTIFIED BY:

MARK	DATE	DESCRIPTION

PROJECT NO:	13080
FILE:	13080-SITE UTIL.DWG
DRAWN BY:	JRF
CHECKED BY:	TRB

LOCATION:

A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

TITLE:

SITE UTILITY PLAN

5

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\PRELIMINARY PLAN\13080-SITE UTIL.dwg USER: DAVID PERRINE DATE: Monday, January 27, 2014 12:59:00 PM

PRELIMINARY PLAT

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

A PART OF THE NORTHEAST QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

LEGAL DESCRIPTION

Lots Numbered Nine (9), Ten (10), and Eleven (11) in Andrews First Addition to the Town, now City of West Lafayette, Tippecanoe County, Indiana, being a part of the East Half of the Northeast Quarter of Section Nineteen (19), in Township Twenty-three (23) North, Range Four (4) West.

EXCEPT a part of said lots described as follows: BEGINNING at the northwest corner of Lot Numbered Eleven (11) and running thence East along the north line of said Lot a distance of fifty (50) feet; thence South parallel with the west line of said Lots a distance of seventy-five (75) feet; thence West parallel with the north line of said Lot Numbered Eleven (11) a distance of fifty (50) feet to the west line of said Lot Numbered Ten (10); thence North along the west line of Lots Numbered Ten (10) and Eleven (11) to the PLACE OF BEGINNING.

Containing in all 0.41 acres ,more or less.

SUBJECT TO ALL EASEMENTS ,RESTRICTIONS ,AND RIGHTS-OF-WAY OF RECORD

LAST INSTRUMENT CONVEYING TITLE TO SUBJECT PROPERTY :

Title Holder: Casey Rentals, LLC
Document Number: 201313016628
Key Number: 79-07-19-286-003.000-026 (164-02600-0556)

LAND SURVEYOR'S CERTIFICATE

The undersigned ,a Registered Professional Land Surveyor of the State of Indiana does hereby certify that the above preliminary plat was prepared under his direct supervision .

CERTIFIED BY _____ 01/29/13 :
Justin R .Frazier — Date

SURVEY NOTE

This drawing does not represent a boundary survey of the property depicted .This plat has been prepared pursuant to Section B-1 (Preliminary Plats for PD Submissions), of the Unified Zoning Ordinance of Tippecanoe County, Indiana as adopted January 2, 1998 (amended) and is based on survey work by TBIRD Design Services, Job No. 13080.



HORIZONTAL SCALE: 1" = 20'

TBIRD
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th STREET • LAFAYETTE, INDIANA
phone: (765) 742-1905 • fax: (765) 742-1905
www.tbirddesign.com

CERTIFIED BY:

JUSTIN R. FRAZIER
REGISTERED
NO. 20600035
STATE OF INDIANA
LAND SURVEYOR

225 NORTHWESTERN AVENUE
PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION

PROJECT NO: 13080
FILE: 13080-PRELIMINARY PLAT.DWG
DRAWN BY: JRF
CHECKED BY: TRB
LOCATION:
A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:
PRELIMINARY PLAT

6

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\PRELIMINARY PLAN\13080-PRELIMINARY PLAT.dwg - USER: JUSTIN FRAZIER - DATE: Wednesday, January 29, 2014 8:44:54 AM

N

0' 50' 100'

HORIZONTAL SCALE: 1" = 50'

CHANGES TO THE MAINTENANCE OF TRAFFIC ARE PERMITTED WITH THE SUBMISSION OF THE FINAL DETAILED PLANS, SUBJECT TO THE APPROVAL OF THE ADMINISTRATIVE OFFICER.

TRAFFIC CONTROL SUMMARY

ALLEY

THE ALLEY WILL REMAIN OPEN UNTIL THE ONSITE BUILDING IS DEMOLISHED. ONCE SITE IS CLEARED, THE SEWER CONSTRUCTION WILL COMMENCE. THE PROJECT SITE WILL BE UTILIZED AS TEMPORARY PARKING FOR PROPERTIES AFFECTED BY THE ALLEY CLOSURE.

NORTHWESTERN AVENUE

THE WESTERLY PARKING LANE WILL BE UTILIZED FOR CONSTRUCTION ACTIVITIES. TWO LANE (ONE WAY) TRAFFIC WILL BE MAINTAINED BY SHIFTING TRAFFIC AND UTILIZING THE EASTERLY PARKING LANE.

NORTH STREET

LANES WILL BE SHIFTED TO THE NORTH BY APPROXIMATELY EIGHT FEET TO ALLOW A CONSTRUCTION ZONE IN PORTIONS OF NORTH STREET. TWO LANE (TWO DIRECTIONAL) TRAFFIC WILL BE MAINTAINED.

TBIRD
Design Services Corporation
Engineering • Surveying
Environmental • Construction Management
105 North 10th STREET • LAFAYETTE, INDIANA
phone: (765) 742-1900 • fax: (765) 742-1905
www.tbirddesign.com

CERTIFIED BY:

225 NORTHWESTERN AVENUE PLANNED DEVELOPMENT

GOLDEN PAWS INVESTMENTS, LLC
711 SOUTH 9TH STREET, SUITE 1
LAFAYETTE, IN 47905

MARK	DATE	DESCRIPTION

PROJECT NO:	13080
FILE:	13080-TRAFFIC.DWG
DRAWN BY:	JRF
CHECKED BY:	TRB

LOCATION:

A PART OF THE NORTHEAST QUARTER QUARTER OF SECTION 19, TOWNSHIP 23 NORTH, RANGE 4 WEST, WABASH TOWNSHIP, WEST LAFAYETTE, INDIANA

TITLE:

MAINTENANCE OF TRAFFIC PLAN

7

FILE: P:\2013\13080 225 Northwestern Avenue\DRAWINGS\PLANS\PRELIMINARY PLAN\13080-TRAFFIC.dwg USER: JUSTIN FRAZIER DATE: Friday, January 24, 2014 3:55:29 PM

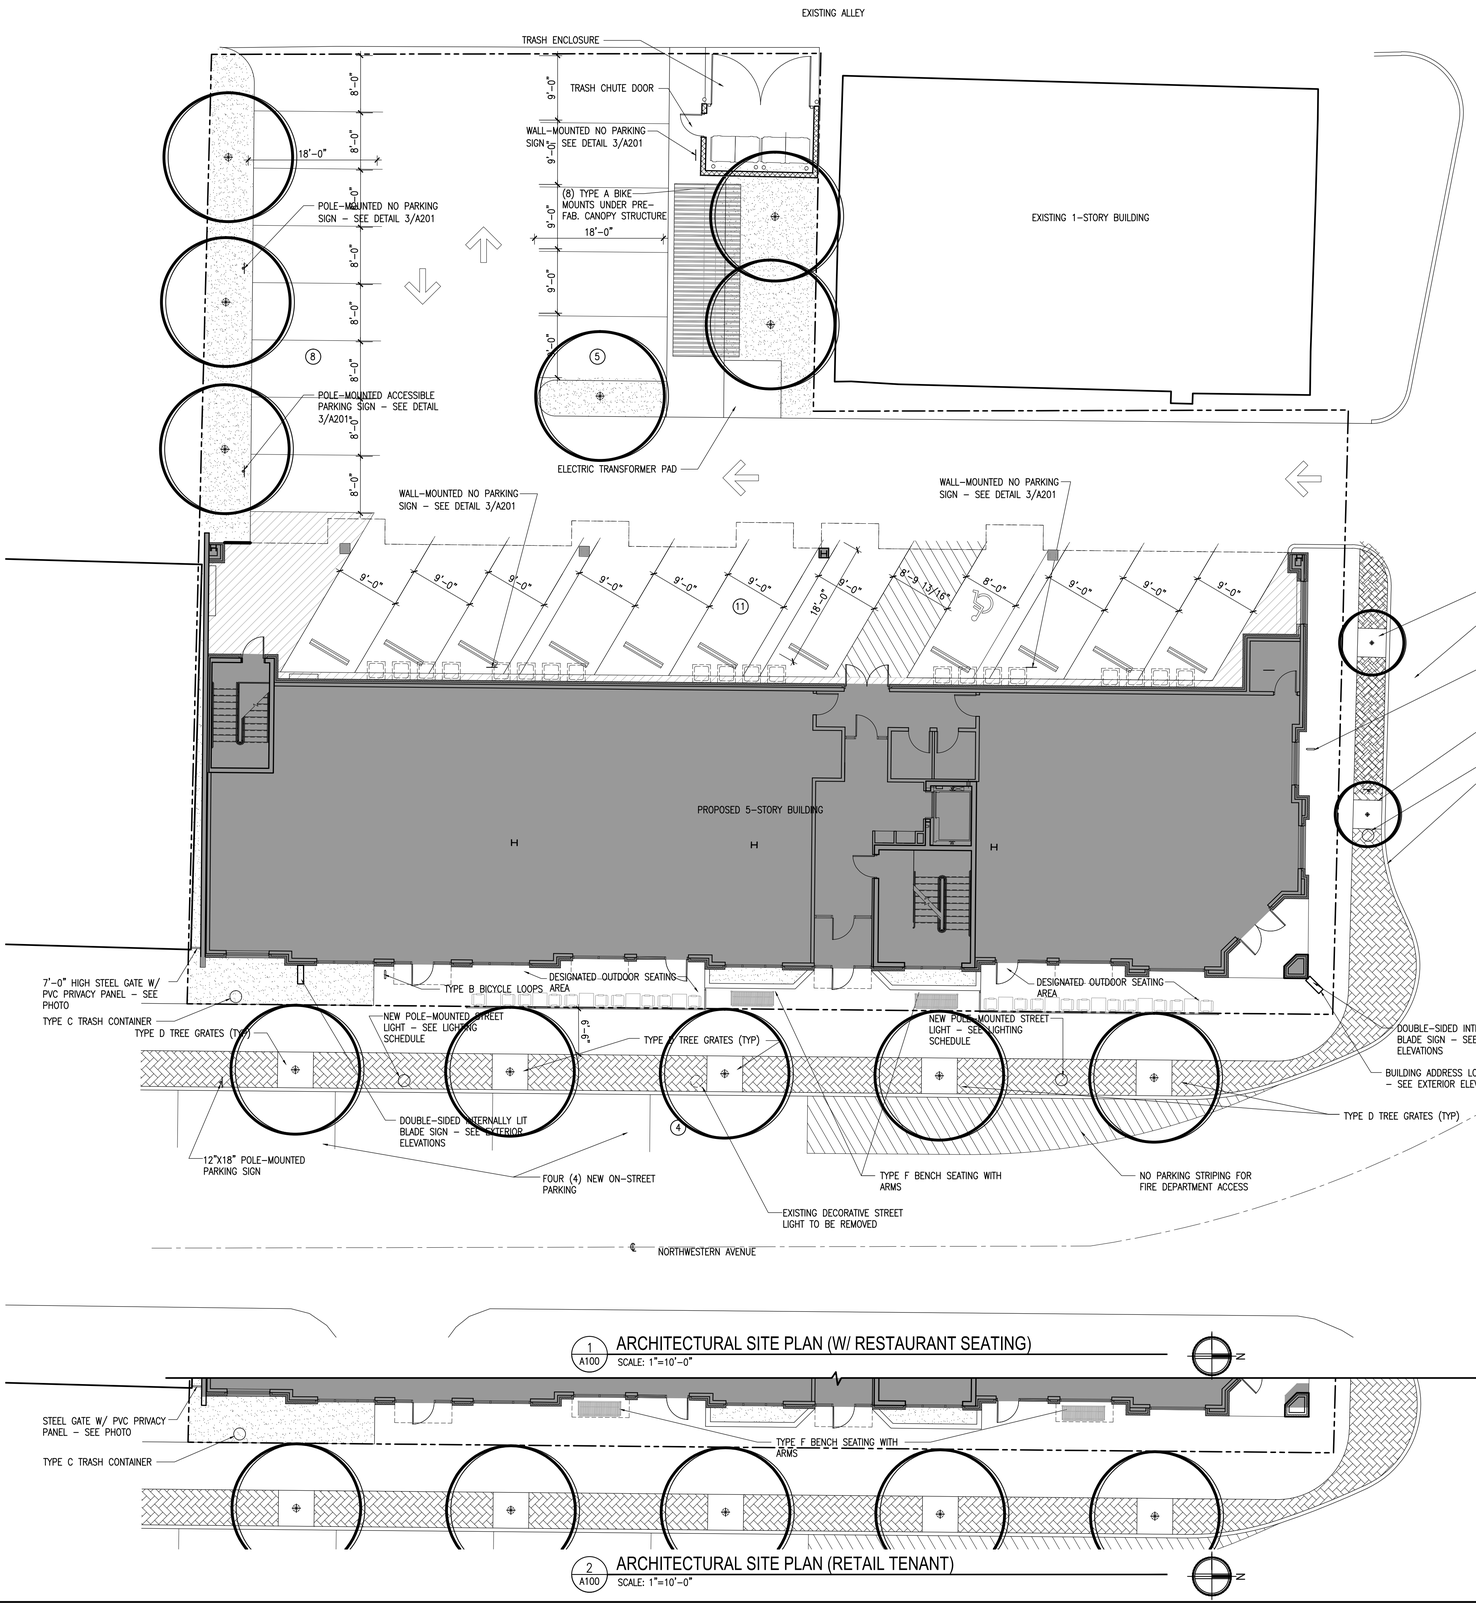

1 A100 ARCHITECTURAL SITE PLAN (W/ RESTAURANT SEATING)
SCALE: 1"=10'-0"

2 A100 ARCHITECTURAL SITE PLAN (RETAIL TENANT)
SCALE: 1"=10'-0"

STREETSCAPE SCHEDULE

KEY	QTY.	MANUFACTURER	SERIES	DESCRIPTION
A	8	PARK-A-BIKE	VARSITY MODEL DV21212	2 BIKES, SILVER
B	4	COLUMBIA CASCADE	CASCADE ORIGINAL CYCLOOPS 2170-3-E	2 BIKES, BLACK
C	2	COLUMBIA CASCADE	CASCADE RENAISSANCE 2814-DT-P	W/ 2000-P-7 LINER
D	5	NEENAH FOUNDRY	ADIRONDACK COLLECTION R760-A1 60X60	5' TREE GRATE
E	2	NEENAH FOUNDRY	ADIRONDACK COLLECTION R742-A1 48X48	4' TREE GRATE
F	2	COLUMBIA CASCADE	CASCADE RENAISSANCE 2806-6	6' BENCH W/ ARMRESTS

SITE PLAN INFORMATION:

ZONING CLASSIFCATION:
CBW TO PDMX (PLANNED DEVELOPMENT)

PARKING PROVIDED
REGULAR = 23 SPACES
ACCESSIBLE = 1 SPACES
TOTAL ONSITE PARKING PROVIDED = 24 SPACES

ADDITIONAL RESIDENTIAL PARKING IS BEING PROVIDED OFF-SITE. SEE NARRATIVE ON SHEET 2 FOR DETAILS.

LOT COVERAGE
LOT AREA = 16,784 S.F. (.385 ACRES)
BUILDING COVERAGE = 8,936 S.F. (53.2%)
VEGETATION COVERAGE = 1,170 S.F. (7.0%)

BUILDING HEIGHT = 64'-0"

PROPOSED BUILDING SETBACKS
EAST FRONT YARD SETBACK = 2'-0"
SOUTH SIDE YARD SETBACK = 3'-6"
NORTH SIDE YARD SETBACK = 0'-0"
WEST REAR YARD SETBACK = 17'-0"

RETAIL SPACE = 5,200 S.F. MAX

UNIT MIX
SECOND FLOOR
(9) 1-BEDROOM UNITS PER FLOOR = 9 BEDS
(1) 2-BEDROOM UNITS PER FLOOR = 2 BEDS
(1) 3-BEDROOM UNITS PER FLOOR = 3 BEDS
THIRD FLOOR
(9) 1-BEDROOM UNITS PER FLOOR = 9 BEDS
(1) 2-BEDROOM UNITS PER FLOOR = 2 BEDS
(1) 3-BEDROOM UNITS PER FLOOR = 3 BEDS
FOURTH FLOOR
(9) 1-BEDROOM UNITS PER FLOOR = 9 BEDS
(1) 2-BEDROOM UNITS PER FLOOR = 2 BEDS
(1) 3-BEDROOM UNITS PER FLOOR = 3 BEDS
FIFTH FLOOR
(9) 1-BEDROOM UNITS PER FLOOR = 9 BEDS
(1) 2-BEDROOM UNITS PER FLOOR = 2 BEDS
(1) 3-BEDROOM UNITS PER FLOOR = 3 BEDS
TOTAL
44 UNITS = 56 BEDS (MAX.)

☑ SELECT DESIRED MATERIAL
☐ ASTM A36 STEEL STRUCTURAL STEEL PLATE
☐ ASTM A53 STEEL FOR ALL PIPE
☐ 300 SERIES STAINLESS STEEL (SPECIAL ORDER)
☑ SELECT DESIRED FINISH
☐ GALVANIZED
☐ BLACK POWDER COAT



MOUNTING FLANGE TOP VIEW



ISOMETRIC



SIDE ELEVATION

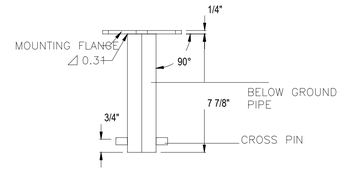

MOUNTING FLANGE SIDE ELEVATION

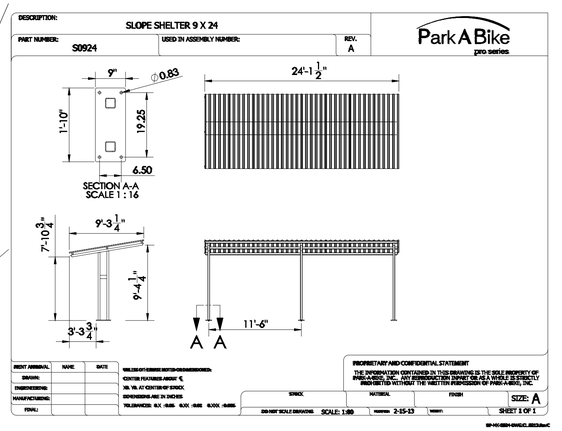

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:
PRELIMINARY PLAN SUBMITAL NOT FOR CONSTRUCTION

PROJECT DATE:
01/28/14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
ARCHITECTURAL SITE PLAN

SHEET NUMBER:
A100

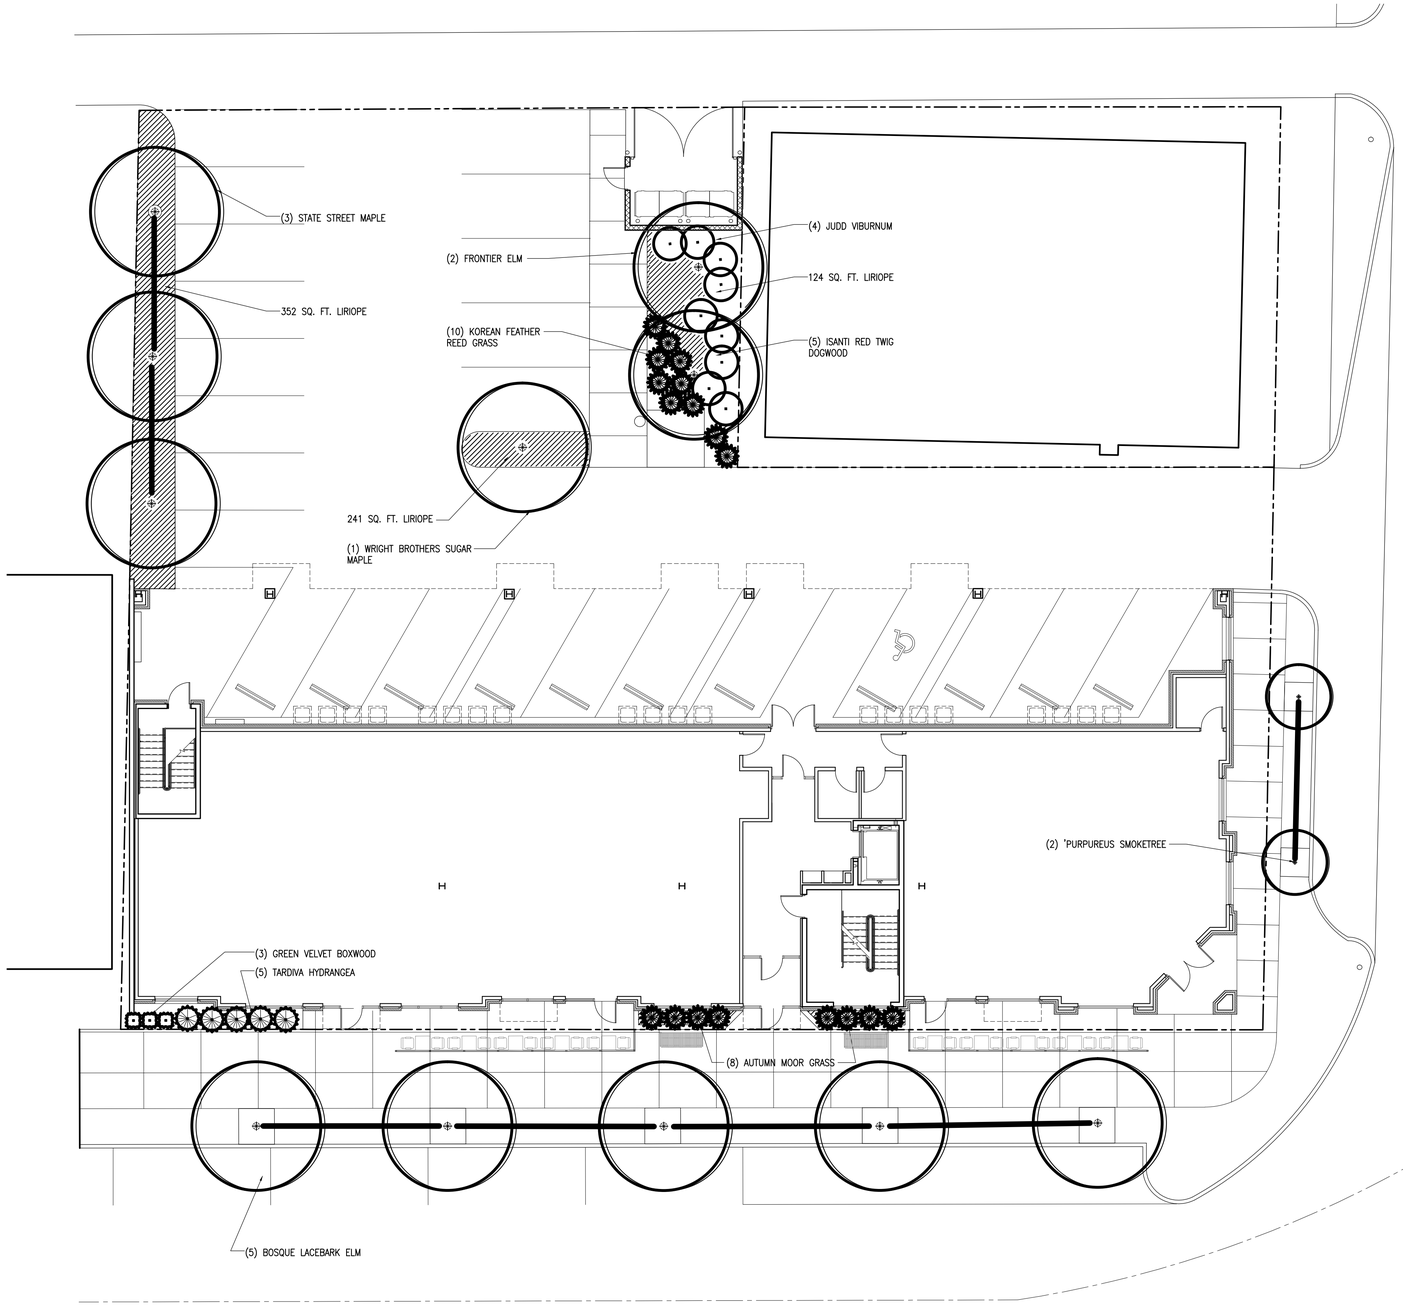

1 A101 LANDSCAPING PLAN
SCALE: 1"=10'-0"

N

PLANT SCHEDULE

KEY	QTY.	BOTANICAL NAME	COMMON NAME	SIZE
TREES				
ArnM	3	ACER MIYABEI 'MORTON'	STATE STREET MAPLE	2-1/2" CAL.
AsW	1	ACER SACCHARUM 'WRIGHT BROTHERS'	WRIGHT BROTHERS SUGAR MAPLE	2-1/2" CAL.
UF	2	ULMUS 'FRONTIER'	FRONTIER ELM	2-1/2" CAL.
UpU	5	ULMUS PARVIFOLIA 'UPMTF'	BOSQUE LACEBARK ELM	2-1/2" CAL.
CpS	2	CONTINUS COGGYGRIA 'PURPUREUS'	PURPUREUS SMOKETREE	2-1/2" CAL.
SHRUBS				
BGV	3	BUXUS X 'GREEN VELVET'	GREEN VELVET BOXWOOD	18"
CsL	5	CORNUS SERICEA 'ISANTI'	ISANTI RED TWIG DOGWOOD	24"
HpT	5	HYDRANGEA PANICULATA 'TARDIVA'	TARDIVA HYDRANGEA	30"
VlB	4	VIBURNUM X JUDDI	JUDD VIBURNUM	36"
ORNAMENTAL GRASSES				
CaB	10	CALAMAGROSTIS ARUNDINACEA BARCHTYRIDCHA	KOREAN FEATHER REED GRASS	1G
Sa	8	SESLERIA AUTUMNALIS	AUTUMN MOOR GRASS	1G
GROUNDCOVERS				
Ls	1025 SQ. FT.	LIRIOPE SPICATA	LIRIOPE	4"

LANDSCAPE GENERAL NOTES

1. IN CASE OF DISCREPANCIES BETWEEN THE PLAN AND PLANT LIST, THE PLAN SHALL DICTATE. IF IN QUESTION, CONTACT THE LANDSCAPE ARCHITECT & THE WEST LAFAYETTE REDEVELOPMENT AND GREENSPACE ADMINISTRATOR.

2. ALL SHRUB PLANTING AREAS TO BE COVERED WITH 3" THICK LAYER OF SHREDDED HARDWOOD BARK MULCH. ALL PERENNIAL BEDS SHALL BE COVERED WITH 1" SHREDDED HARDWOOD BARK MULCH. BARK MULCH SHALL BE APPROVED BY LANDSCAPE ARCHITECT AND SHALL BE UNIFORM IN TEXTURE AND COLOR AND SHALL BE OBTAINED FROM SAWMILL OR LUMBERING OPERATIONS. NO UTILITY MULCH OR PROCESSED TREE TRIMMINGS WILL BE ALLOWED.

3. AN APPROVED PRE-EMERGENT HERBICIDE SHALL BE APPLIED IN ALL PLANTING AND GROUND COVER BEDS AT RATES SPECIFIED BY MANUFACTURER FOR EACH VARIETY OF PLANT.

4. FINAL PLACEMENT OF PLANT MATERIALS, ETC. SHALL BE APPROVED BY LANDSCAPE ARCHITECT AND THE WEST LAFAYETTE GREENSPACE ADMINISTRATOR BEFORE PLANTING OPERATIONS ARE TO PROCEED. ALL TREE LOCATION SHALL BE MARKED WITH A WOODEN STAKE INDICATING VARIETY AND SIZE OF TREE. ALL STAKES SHALL BE REMOVED FOLLOWING PLANTING OPERATIONS.

5. SUBSTITUTIONS OF PLANT MATERIAL WILL BE ALLOWED SUBJECT TO WEST LAFAYETTE STANDARDS. IF PLANTS ARE SHOWN TO BE UNAVAILABLE, THE CONTRACTOR SHALL NOTIFY LANDSCAPE ARCHITECT PRIOR TO BID DATE IN WRITING & SUBJECT TO WEST LAFAYETTE APPROVAL. ALL PLANTS SHALL BE INSPECTED AND TAGGED WITH PROJECT IDENTIFICATION AT NURSERY OR CONTRACTORS OPERATION PRIOR TO MOVING TO JOB SITE. PLANTS MAY ALSO BE INSPECTED AND APPROVED OR REJECTED ON THE JOB SITE.

6. ALL PLANTS ARE TO MEET OR EXCEED THE MOST CURRENT EDITION OF THE WEST LAFAYETTE CITY STANDARDS.

7. PLANTS AND ALL OTHER MATERIALS TO BE STORED ON SITE WILL BE PLACED WHERE THEY WILL NOT CONFLICT WITH CONSTRUCTION OPERATIONS AND AS DIRECTED BY OWNER.

8. ALL NEW LANDSCAPE PLANTING SHALL BE GUARANTEED FOR A PERIOD OF ONE YEAR FOLLOWING FINAL INSPECTON BY LANDSCAPE ARCHITECT. AT THE END OF THIS PERIOD, PLANT MATERIAL TERMED DEAD OR UNSATISFACTORY BY LANDSCAPE ARCHITECT SHALL BE REPLACED AT NO ADDITIONAL CHARGE BY THE LANDSCAPE CONTRACTOR.

9. THE LANDSCAPE CONTRACTOR SHALL OBTAIN AND PAY FOR ALL PERMITS AND FEES THAT MAY BE REQUIRED FOR HIS PORTION OF WORK.

10. PEAT MOSS TO BE USED ON PROJECT SHALL BE A DOMESTIC OR IMPORTED MATERIAL, CHOCOLATE BROWN IN COLOR AND COMPOSED OF PARTIALLY DECOMPOSED VEGETABLE MATERIAL. PEAT MOSS TO ALSO BE MILDLY ACIDIC IN CHARACTER AND SHALL MEET APPROVAL OF LANDSCAPE ARCHITECT.

11. LANDSCAPE CONTRACTOR SHALL NOTIFY LANDSCAPE ARCHITECT & THE CITY OF WEST LAFAYETTE REDEVELOPMENT & GREENSPACE ADMINISTRATOR IN WRITING PRIOR TO BID DATE OF ANY PLANTS THAT HE FEELS MAY NOT SURVIVE IN LOCATIONS NOTED.

12. ALL DISTURBED LAWN AREAS SHALL BE SODDED OR SEEDED AS NOTED. LAWNS SHALL BE SODDED OR SEEDED WITH SEED MIX AS APPROVED BY LANDSCAPE ARCHITECT.

13. ALL LAWNS SHALL BE GUARANTEED TO HAVE A FULL UNIFORM STAND OF ACCEPTABLE GRASS AT END OF ONE YEAR GUARANTEE PERIOD WITH NO BARE SPOTS COMPRISING MORE THAN 2% OF ANY LAWN AREA. ANY AREA SO NOTED WILL BE RESODDED UNTIL AN ACCEPTABLE STAND OF GRASS IS ESTABLISHED.

14. ALL LANDSCAPING PLANTINGS TO BE MAINTAINED FOR 60 DAYS FOLLOWING FINAL INSPECTION BY LANDSCAPE ARCHITECT. ALL SEEDED LAWNS TO BE MAINTAINED FOR A PERIOD OF 60 DAYS AND SODDED LAWNS 30 DAYS FOLLOWING FINAL INSPECTION BY LANDSCAPE ARCHITECT AFTER WRITTEN REQUEST FROM LANDSCAPE CONTRACTOR. MAINTENANCE TO INCLUDE WATERING WEEDING, CULTIVATION, MULCHING, MOWING AND ALL OTHER NECESSARY OPERATIONS REQUIRED FOR PROPER ESTABLISHMENT OF LAWNS AND PLANTINGS.

15. CONTRACTOR TO SUBMIT UNIT PRICES ON EVERY TYPE OF WORK AS REQUESTED BY LANDSCAPE ARCHITECT.

16. ALL LAWN AREAS WITHIN BASE PROJECT SITE TO RECEIVE 4-6'' APPROVED TOPSOIL PRIOR TO SODDING OR SEEDING OPERATIONS.

17. BACKFILL FOR TREE AND SHRUB PLANTING SHALL BE 75% APPROVED TOPSOIL AND 25% APPROVED PEAT MOSS. TOP LAYER OF BACKFILL SHALL BE 100% EXISTING TOPSOIL. A 5-10-5 ANALYSIS SLOW RELEASE FERTILIZER SHALL BE INCORPORATED INTO BACKFILL AT APPROVED RATES.

18. PROVIDE MINIMUM 6" PLANTING SOIL IN ALL GROUND COVER AND FLOWER AREA WITH A MIXTURE COMPRISED OF ONE PART COMPOSTED MANURE, 5 PARTS TOPSOIL AND 4 PARTS PEAT MOSS. A FULL 4" LAYER OF APPROVED SHREDDED FIBROUS PEAT MOSS MAY BE USED IN LIEU OF PLANTING MIX.

19. LAWNS SHALL BE SEEDED FOLLOWING SCARIFYING, FINAL GRADING, FERTILIZING AND RAKING. LAWN AREAS SHALL BE FERTILIZED WITH 12-12-12 ANALYSIS FERTILIZER AT THE RATE OF 10 LBS./1000 S.F. AND LIME APPLIED AS DICTAED BY SOILS TESTS PRIOR TO SEEDING.

20. IT IS THE LANDSCAPE CONTRACTOR'S RESPONSIBILITY TO NOTIFY ALL UTILITY COMPANIES 72 HOURS BEFORE CONSTRUCTION IS TO START TO VERIFY IF ANY UTILITIES ARE PRESENT ON SITE. ALL VERIFICATIONS (LOCATIONS, SIZE AND DEPTH) SHALL BE MADE BY THE APPROPRIATE UTILITY COMPANIES. WHEN EXCAVATIONIS AROUND OR OVER EXISTING UTILITIES, THE CONTRACTOR MUST NOTIFY THE UTILITY COMPANY SO A REPRESENTATIVE OF THE UTILITY COMPANY CAN BE PRESENT TO INSTRUCT AND OBSERVE DURING THE EXCAVATION.

21. TREE PRESERVATION NOTE: PROTECT EXISTING TREES THAT ARE TO BE SAVED BY ERECTING CONSTRUCTION FENCE AROUND THESE TREES BEFORE ANY SITE WORK BEGINS. PLACE FENCING AT LEAST AT THE DRIPLINE OF THE TREE AND FURTHER FROM THE TRUNK IF POSSIBLE. THE FENCED AREA IS TO BE KEPT CLEAR OF BUILDING MATERIALS, WASTE AND EXCESS SOIL. NO DIGGING, TRENCHING, COMPATION, OR OTHER SOIL DISTURBANCE IS ALLOWED IN THE FENCED AREAS.

22. CHANGES TO THE LANDSCAPE PLANTING AT THE FRONT OF THE BUILDING TO ALLOW FOR FLEXIBLE TENANT SPACE ON THE FIRST FLOOR SHALL BE ALLOWED W/ THE CITY OF WEST LAFAYETTE GREENSPACE ADMINISTRATOR'S APPROVAL

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:

PRELIMINARY PLAN SUBMITAL NOT FOR CONSTRUCTION

PROJECT DATE:
01/28/14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
LANDSCAPING PLAN

SHEET NUMBER:
A101

4 A105 BIKE RACK B - EXAMPLE
SCALE: NOT TO SCALE

3 A105 BIKE RACK A - EXAMPLE
SCALE: NOT TO SCALE

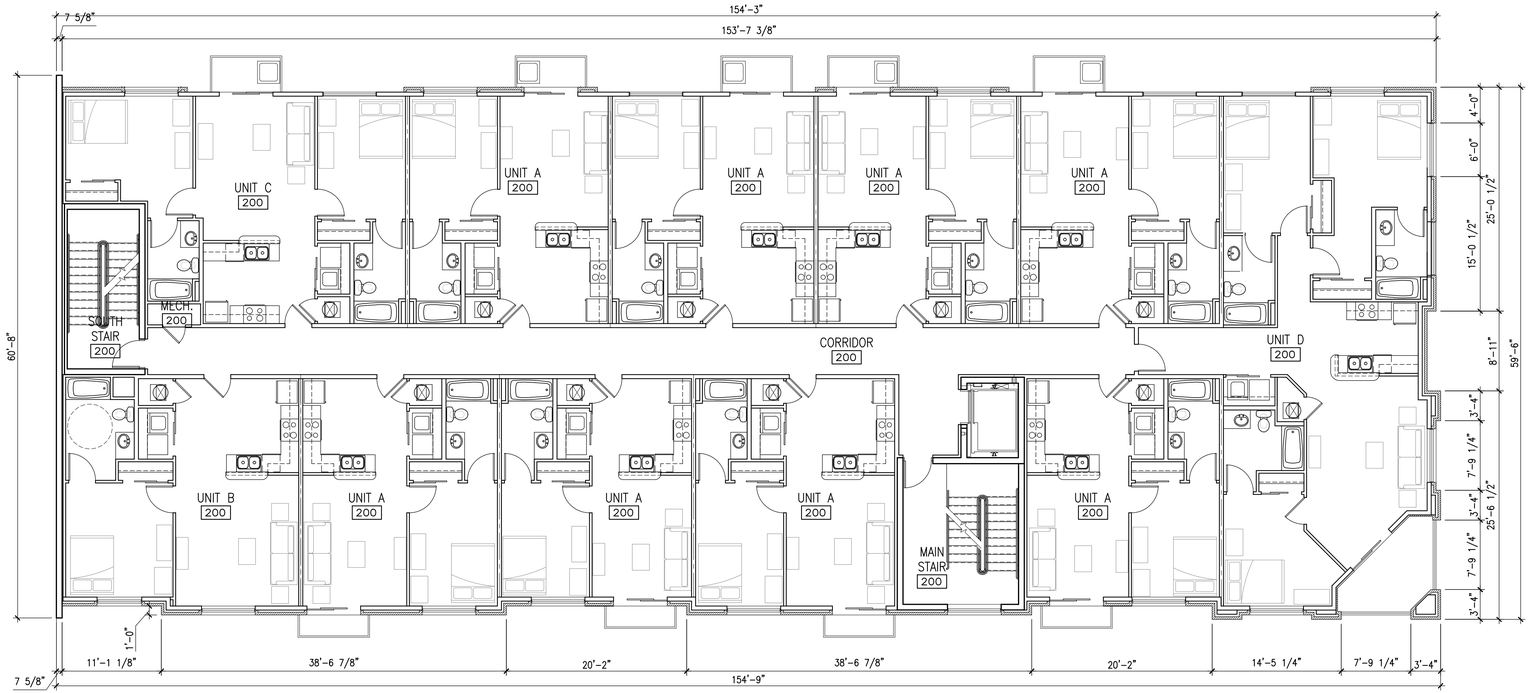

2 A105 2ND - 5TH FLOOR PLAN
SCALE: 1/8"=1'-0"

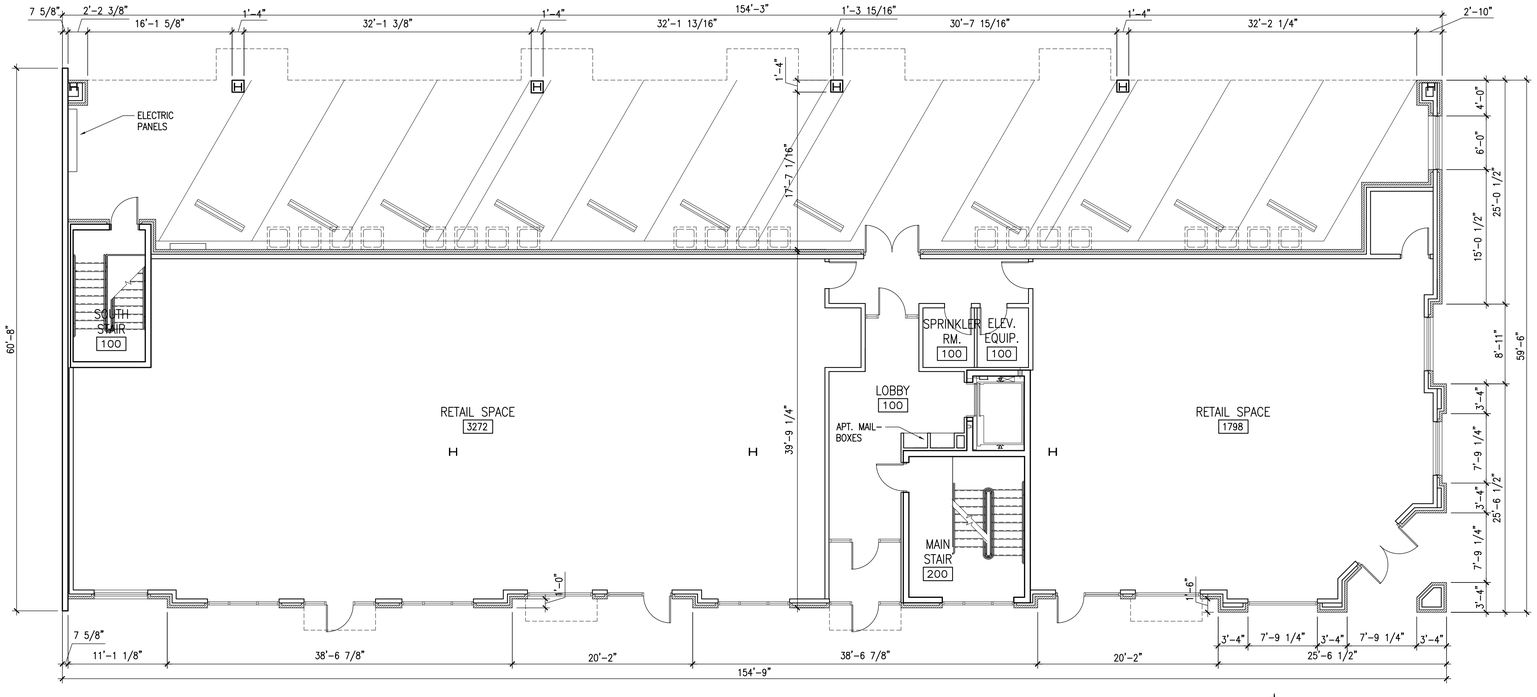

1 A105 FIRST FLOOR PLAN
SCALE: 1/8"=1'-0"

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:
PRELIMINARY PLAN SUBMITAL NOT FOR CONSTRUCTION

PROJECT DATE:
01/28/14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
1ST-2ND FLOOR PLANS

SHEET NUMBER:
A105

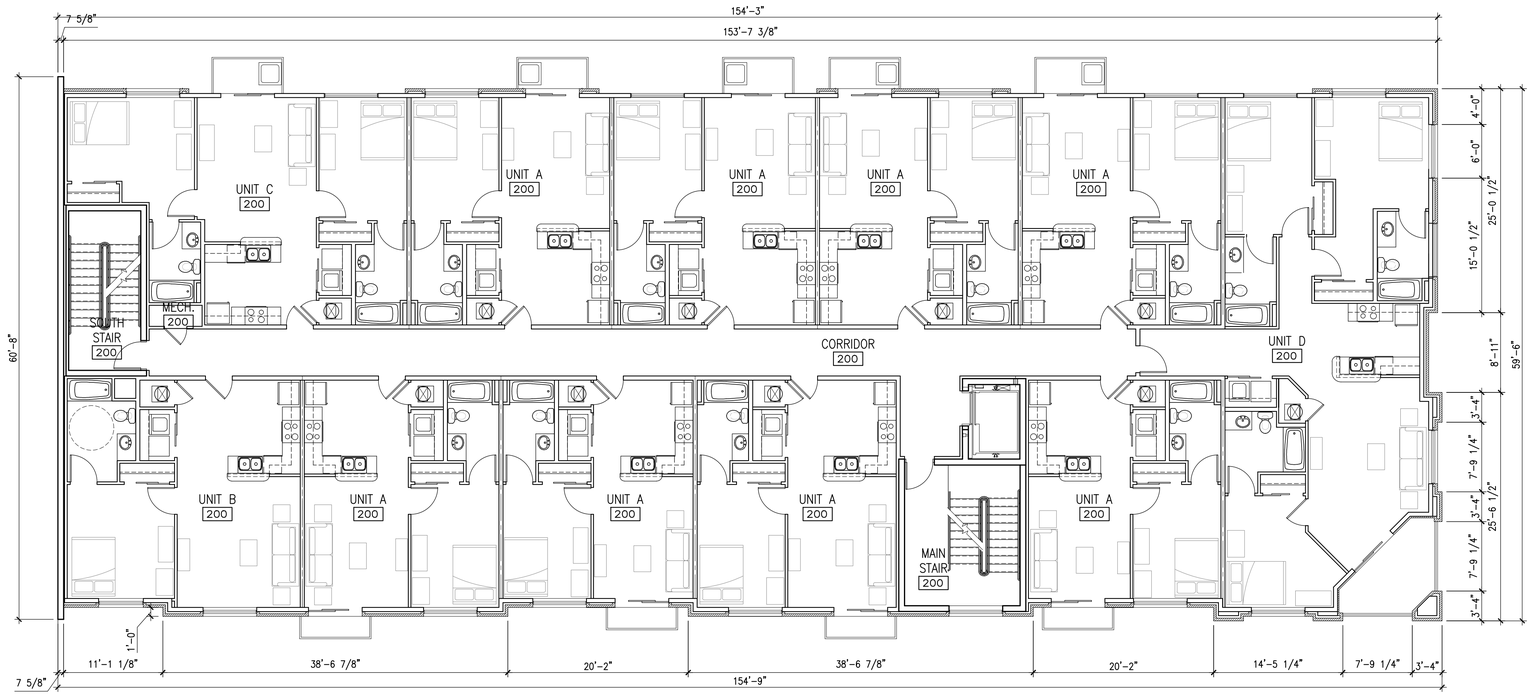

2 A106 4TH FLOOR PLAN
SCALE: 1/8"=1'-0"

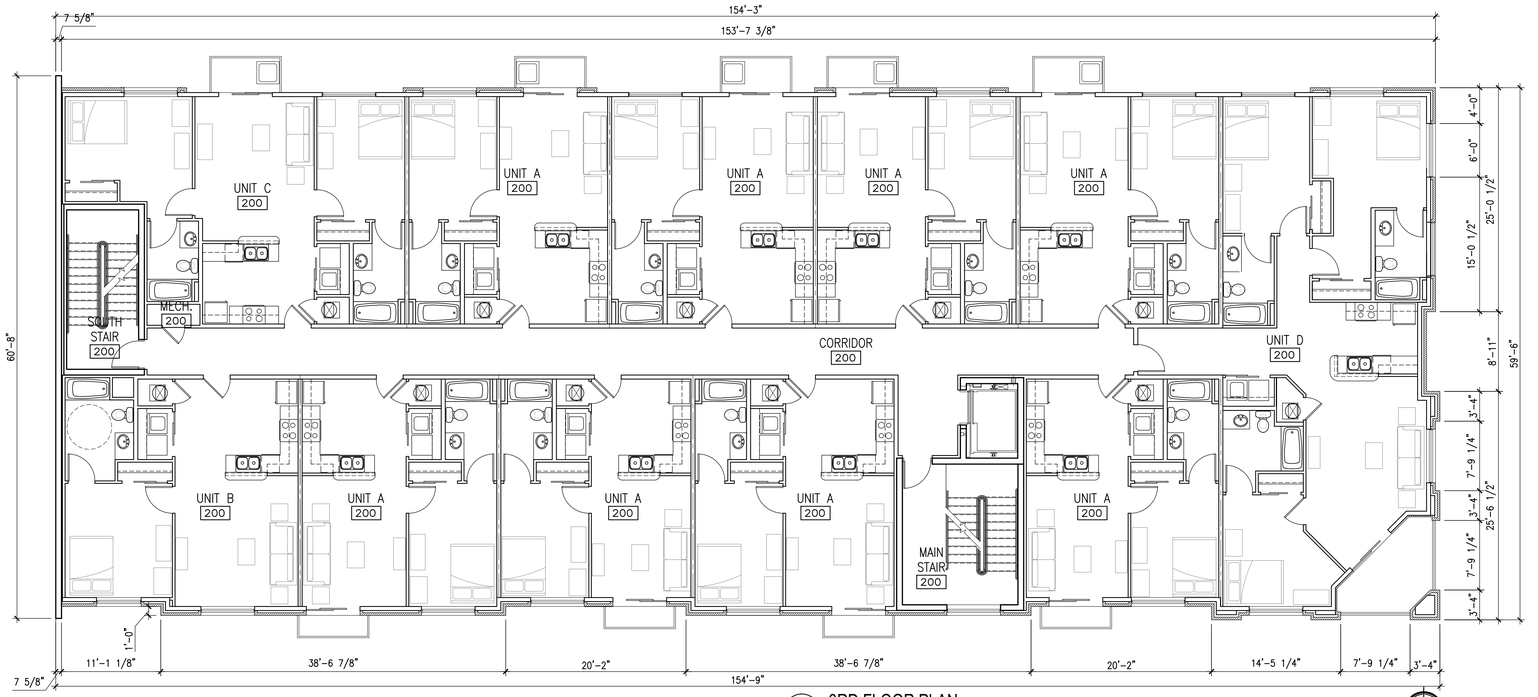

1 A106 3RD FLOOR PLAN
SCALE: 1/8"=1'-0"

3 A106 BIKE SHELTER EXAMPLE
SCALE: N.T.S.

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:
PRELIMINARY PLAN
SUBMITAL NOT FOR
CONSTRUCTION

PROJECT DATE:
01/28/14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
3RD-4TH FLOOR
PLANS

SHEET NUMBER:
A106

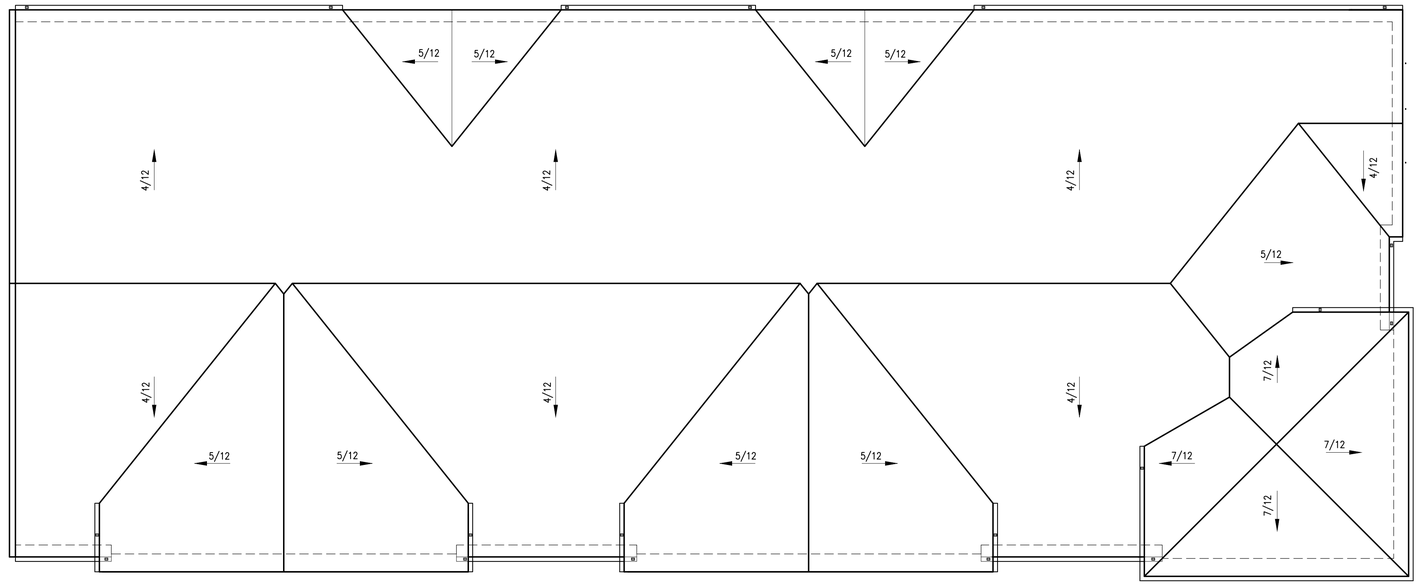

2 A107 ROOF PLAN
SCALE: 1/8"=1'-0"

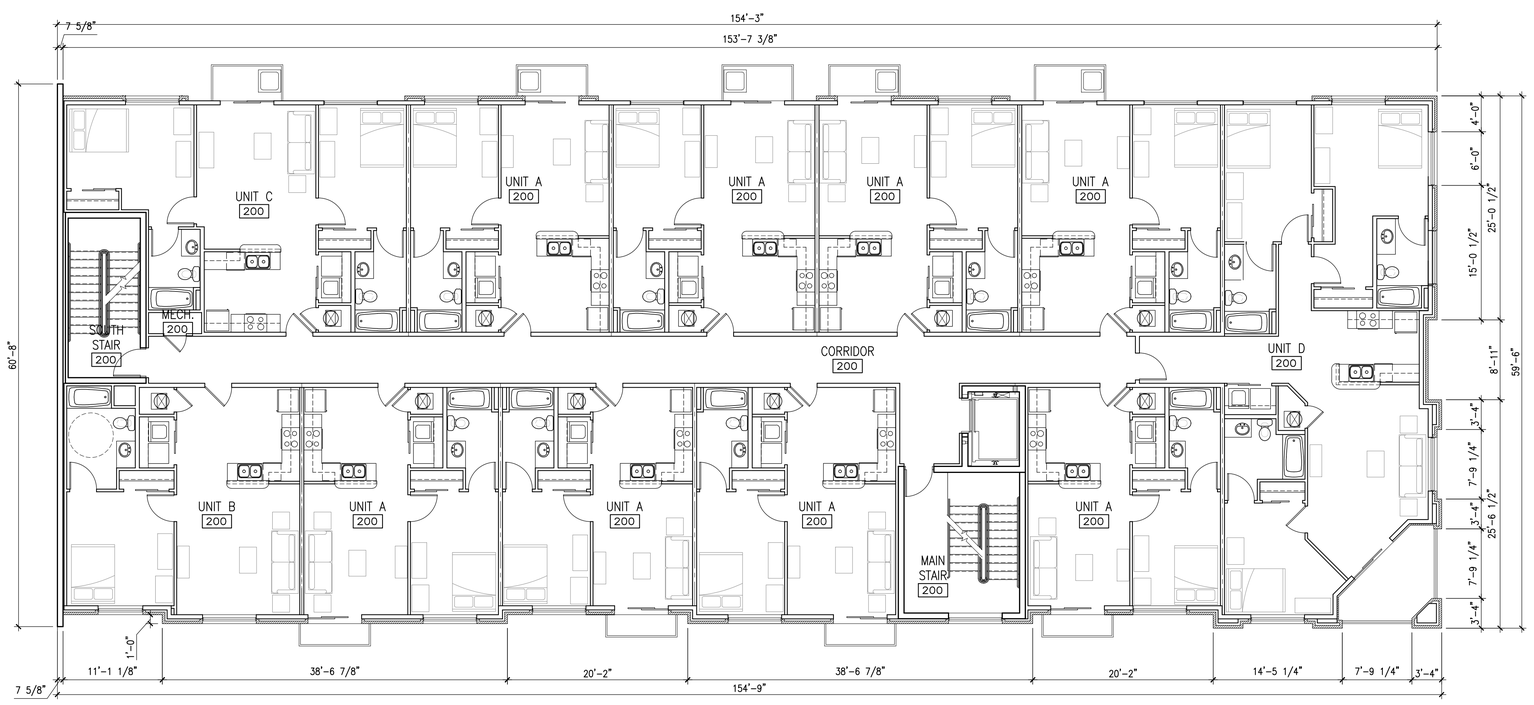

1 A107 FIFTH FLOOR PLAN
SCALE: 1/8"=1'-0"

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:

PRELIMINARY PLAN
SUBMITAL NOT FOR
CONSTRUCTION

PROJECT DATE:
01/28/14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
5TH FLOOR PLAN

SHEET NUMBER:
A107

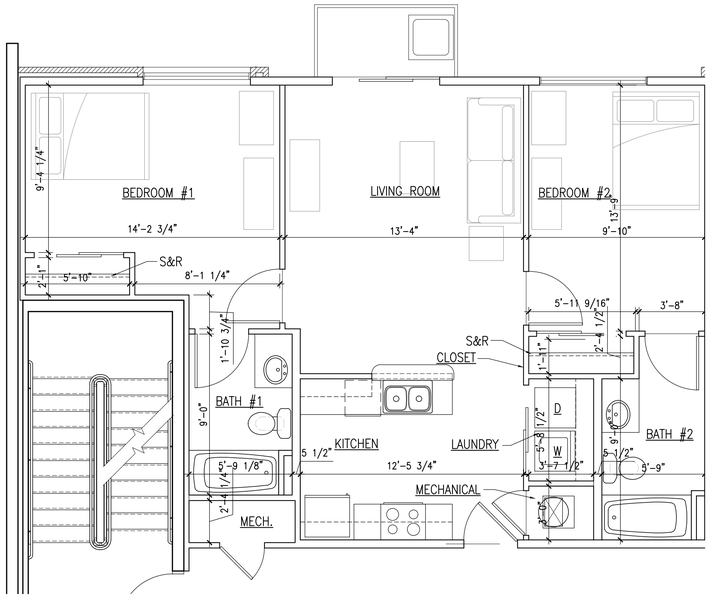

3 A110 UNIT 2C FLOOR PLAN
SCALE: 1/4"=1'-0"

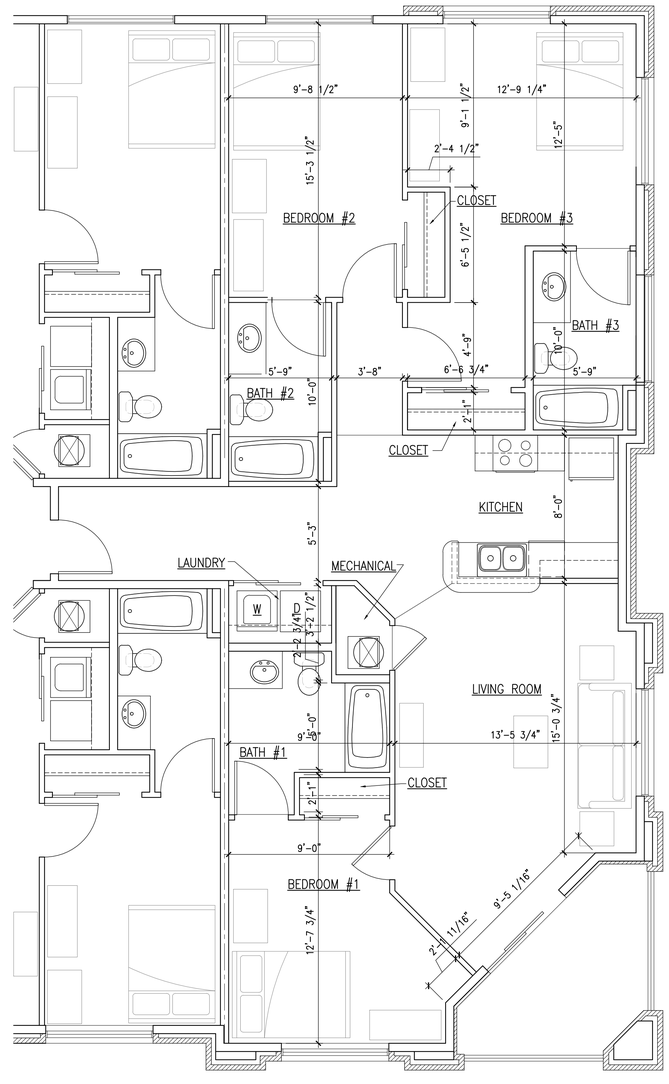

1 A110 UNIT 2A FLOOR PLAN
SCALE: 1/4"=1'-0"

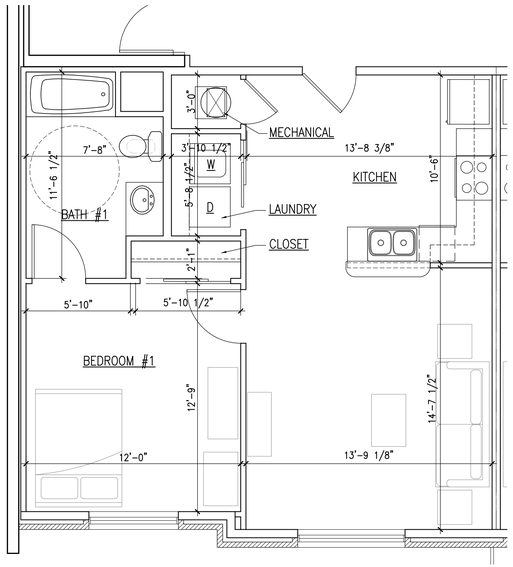

4 A110 UNIT 1 FLOOR PLAN
SCALE: 1/4"=1'-0"

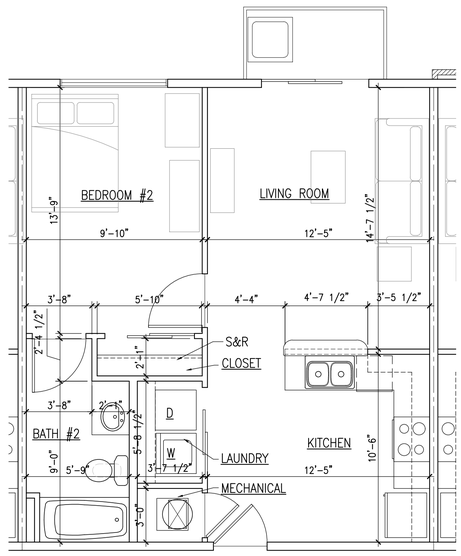

2 A110 UNIT 2B FLOOR PLAN
SCALE: 1/4"=1'-0"

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:
PRELIMINARY PLAN
SUBMITAL NOT FOR
CONSTRUCTION

PROJECT DATE:
01/28/14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
UNIT PLANS

SHEET NUMBER:
A110

5 A200 STREETSCAPE TRASH CONTAINER
SCALE: N.T.S

4 A200 STREETSCAPE BENCH
SCALE: N.T.S

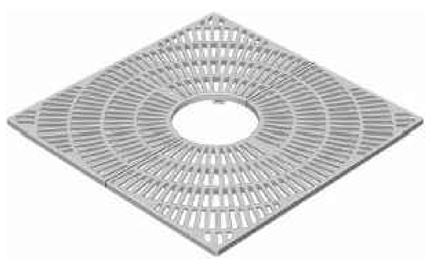

3 A200 TREE GRATE EXAMPLE
SCALE: N.T.S

2 A200 WEST ELEVATION
SCALE: 1/8"=1'-0"

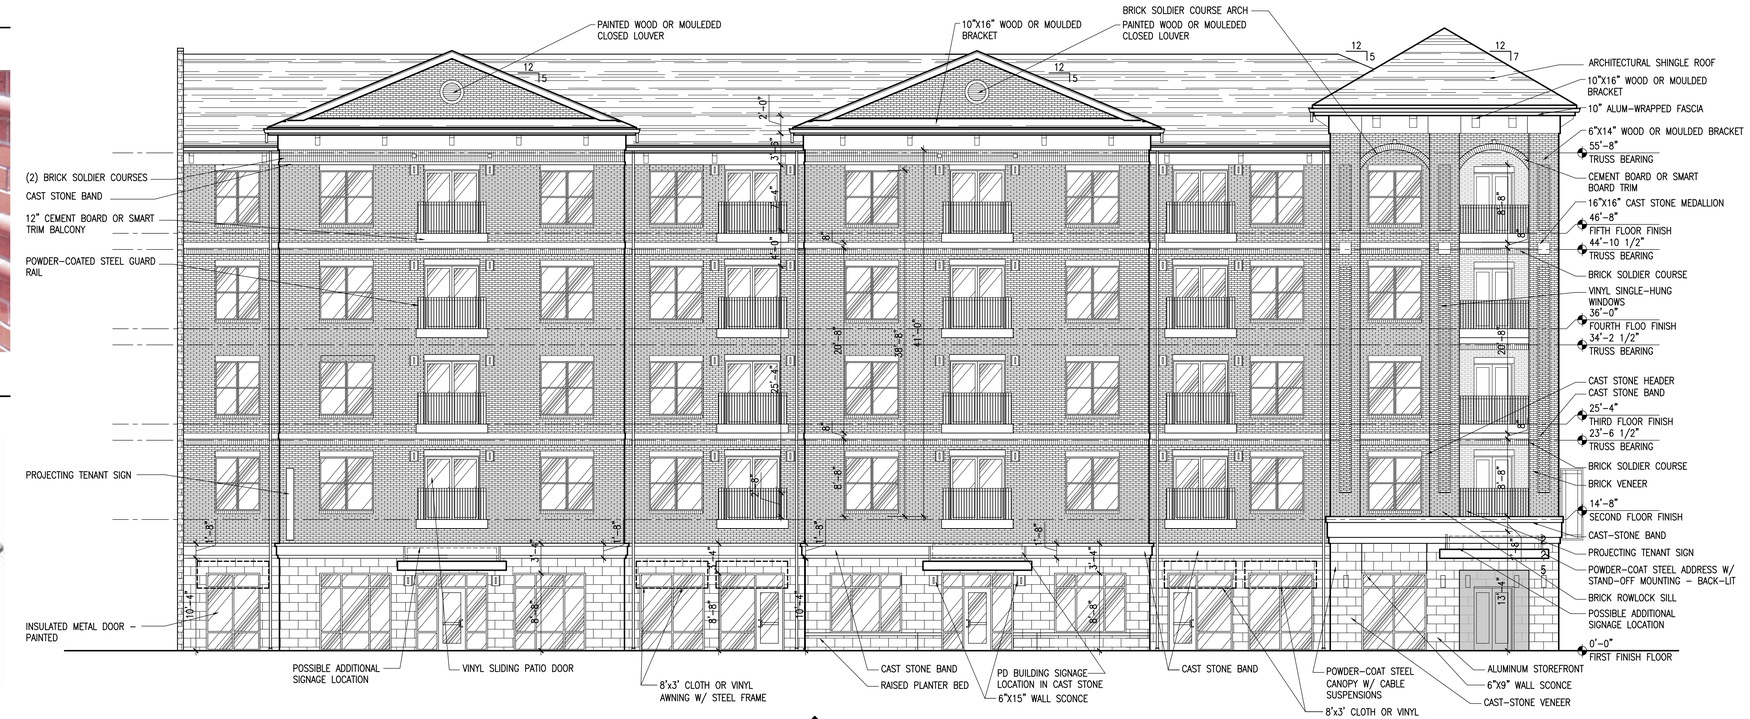

1 A200 EAST ELEVATION
SCALE: 1/8"=1'-0"

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:
PRELIMINARY PLAN SUBMITAL NOT FOR CONSTRUCTION

PROJECT DATE:
01/28/14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
EXTERIOR ELEVATIONS

SHEET NUMBER:
A200

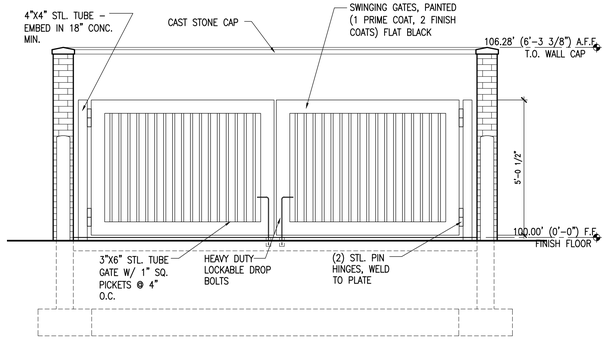

6 A201 TRASH ENCLOSURE FRONT ELEVATION
SCALE: 3/8" = 1'-0"

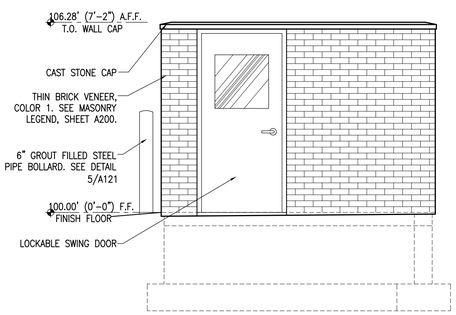

5 A201 TRASH ENCLOSURE SIDE ELEVATION
SCALE: 3/8" = 1'-0"

11 A201 METAL GATE W/ PVC PRIVACY SCREEN
SCALE: N.T.S.

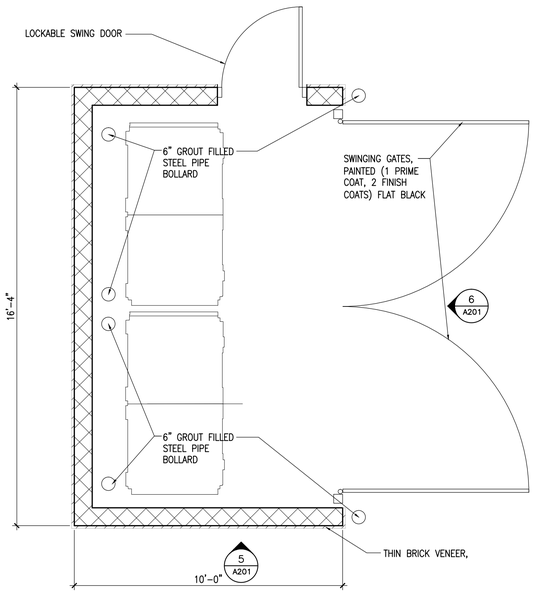

7 A201 TRASH ENCLOSURE PLAN
SCALE: 3/8"=1'-0"

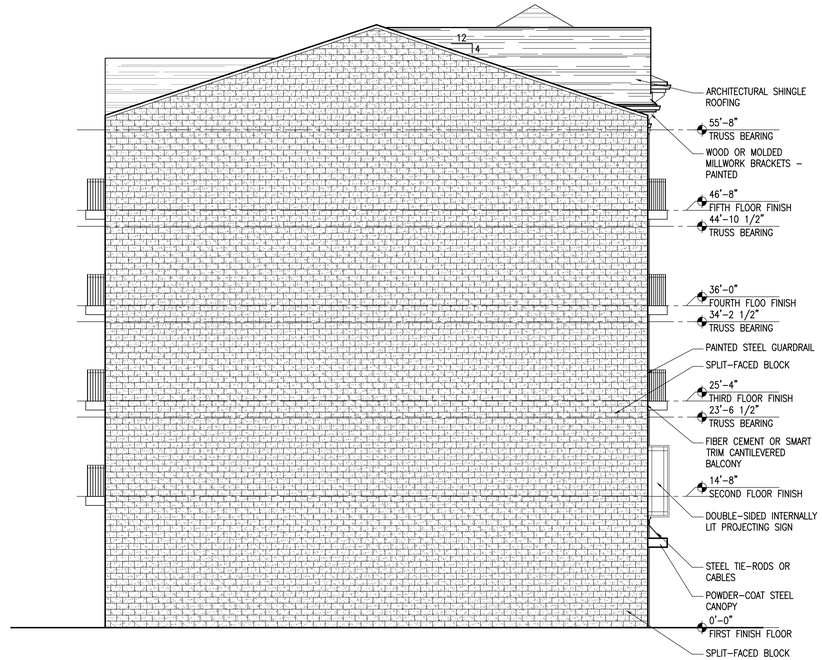

2 A201 SOUTH ELEVATION
SCALE: 1/8"=1'-0"

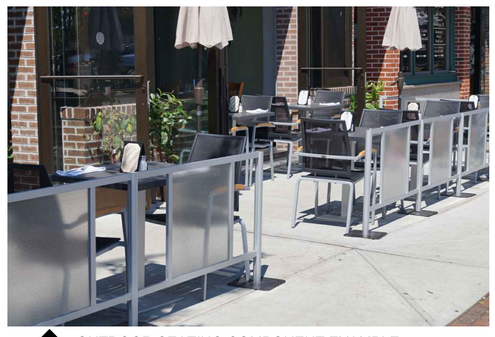

10 A201 OUTDOOR SEATING COMPONENT EXAMPLE
SCALE: N.T.S.

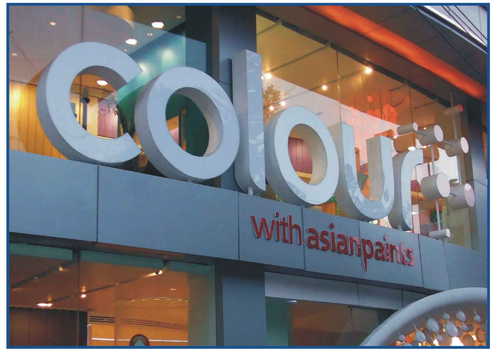

9 A201 ON-OVERHANG SIGNAGE EXAMPLE
SCALE: N.T.S.

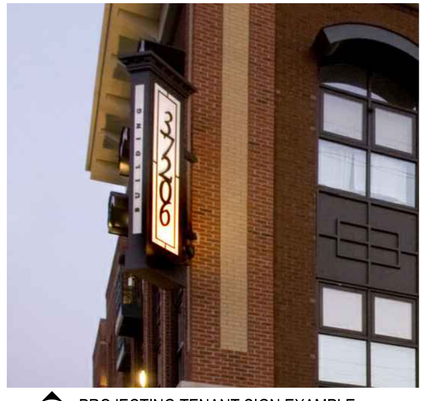

8 A201 PROJECTING TENANT SIGN EXAMPLE
SCALE: N.T.S.

4 A201 12"X18" ADA PARKING SIGN
SCALE: N.T.S.

3 A201 12"X18" PERMIT PARKING SIGN
SCALE: N.T.S.

1 A201 NORTH ELEVATION
SCALE: 1/8"=1'-0"

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:
PRELIMINARY PLAN SUBMITAL NOT FOR CONSTRUCTION

PROJECT DATE:
01/28/14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
EXTERIOR ELEVATIONS

SHEET NUMBER:
A201

LIGHT FIXTURE SCHEDULE

SYMBOL	LABEL	DESCRIPTION
▭	F-1	(2) 13W QUAD TUBE 4-PIN FLUOURESCENT WALL-MOUNTED FIXTURE IN A BLACK FINISH WITH POLYCARBONATE MATTE WHITE DIFFUSER. OXYGEN LIGHTING 2-706-15 OR APPROVED EQUAL.
□	F-2	(1) 18 WATT TRIPLE TUBE COMPACT FLOURESCENT IN BLACK METAL FRAME HOUSING W/ OPAL GLASS DIFFUSER DOWNLIGHT, LBL LIGHTING PW-635-BL-CF1HE-W OR APPROVED EQUAL.
◡	F-3	(1) 13 WATT QUAD TUBE COMPACT FLOURESCENT IN BLACK POLYCARBONATE ENCLOSURE FRAME HOUSING, LBL LIGHTING PW-6021-B-2131HE-W OR APPROVED EQUAL.
○	F-4	SURFACE-MOUNTED LED PARKING GARAGE AND CANOPY LUMINAIRE W/ ALUMINUM HOUSING W/ WAVESTREAM ACRYLIC DIFFUSER. MCGRAW-EDISON TOPTIER LED TT-A4-LED-E1-CQ OR APPROVED EQUAL.
▭	F-5	20' HIGH POLE-MOUNTED LED LUMINAIRE IN DIE-CAST ALUMINUM HOUSING AND HEAT SINK W/ 51 WATT LIGHT SQUARE. MCGRAW-EDISON GLEON GALLEON LED GLEON-AA-04-LED-E1-SL4 OR APPROVED EQUAL.
□	F-6	7-1/4" WALL-MOUNTED LED LUMINAIRE WALL FLOOD IN DIE-CAST ALUMINUM HOUSING AND HEAT SINK W/ 51 WATT LIGHT SQUARE. MASQUE II LED OR APPROVED EQUAL.

3 E100 PARAPET LIGHTING PLAN
SCALE: 3/32"=1'-0"

2 E100 FLOORS 2-5 LIGHTING PLAN
SCALE: 3/32"=1'-0"

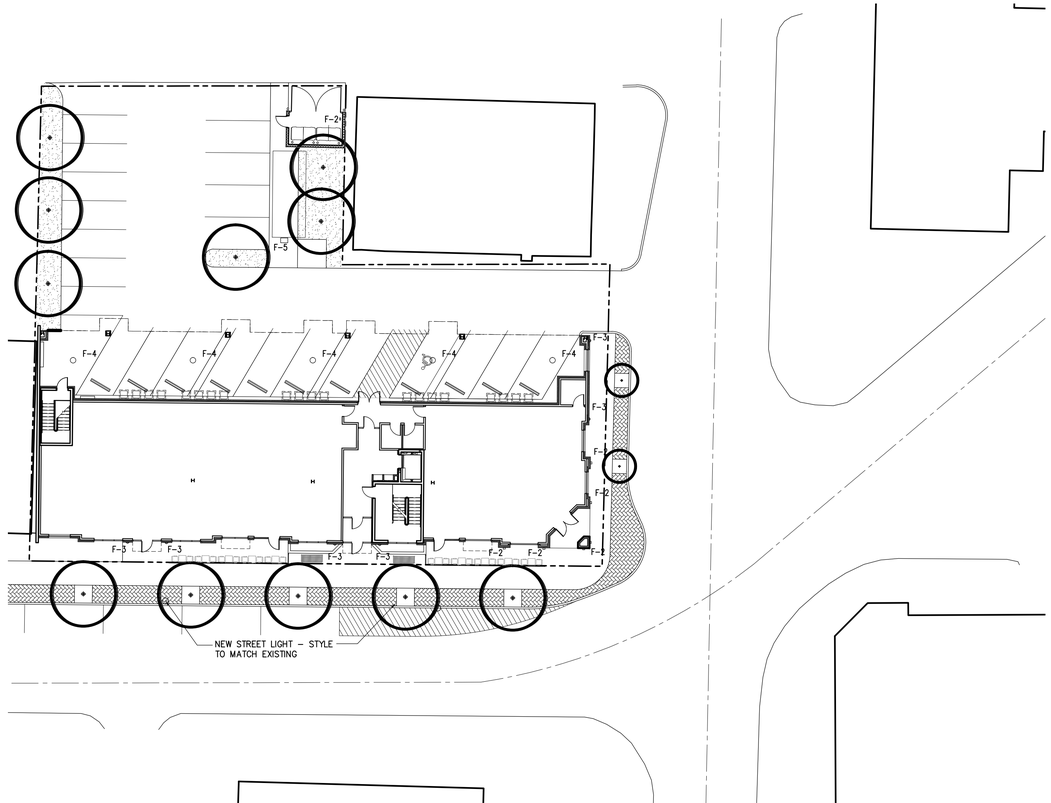

1 E100 SITE LIGHTING PLAN
SCALE: 1"=20'-0"

LIGHTING GENERAL NOTES

REFER TO THE NARRATIVE FOR THE SCHEDULE OF PROPOSED LIGHT FIXTURES.

1. THE PROPOSED LIGHT FIXTURES MAY BE SUBSTITUTED FOR A SIMILAR FIXTURE AT THE APPROVAL OF THE ADMINISTRATIVE OFFICER PROVIDED THE LIGHTING TYPE, LAMP WATTAGE, AND GENERAL STYLE OF FIXTURE IS THE SAME.
2. EMERGENCY LIGHTING AND EXIT SIGNAGE SHALL BE PROVIDED PER THE INDIANA BUILDING CODE ALTHOUGH NOT SHOWN ON THESE PLANNED DEVELOPMENT DRAWINGS.
3. SEE SHEET E101 FOR CUTSHEETS OF THE LIGHT FIXTURE APPEARANCE FOR THE KEYS LISTED ON THE LIGHTING PLAN.

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:

PRELIMINARY PLAN
SUBMITTAL NOT FOR
CONSTRUCTION

PROJECT DATE:
01/28/14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY: BGK

DRAWING TITLE:
ELECTRICAL LIGHTING PLAN

SHEET NUMBER:
E100

F-6

EXTERIOR ARCHITECTURAL LUMINAIRES FACADE LIGHTING

MASQUE™ II

CERAMIC METAL HALIDE / QUARTZ HALOGEN / LED



FASCIA OPTIONS (NOTE: FASCIAS W/ LEDs ARE NOT AVAILABLE)

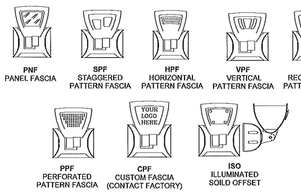

PNF PANEL FASCIA
SPF STAGGERED PATTERN FASCIA
HPF HORIZONTAL PATTERN FASCIA
VPF VERTICAL PATTERN FASCIA
RPF RECTANGULAR PATTERN FASCIA
PPF PERFORATED PATTERN FASCIA
CPF CUSTOM FASCIA (CONTACT FACTORY)
ISO ILLUMINATED SOLID OFFSET

SPECIFICATIONS

Housing: The optical housing is a heavy duty single piece die-casting of 360 low copper content aluminum.

Doorframe & Lenses: The doorframe is constructed from a heavy duty single piece die-casting of 360 low copper content aluminum. Flush captive stainless steel bolts fasten the doorframe to the housing.

A single piece molded silicone gasket seals the primary and any optional lenses between the doorframe and housing. The design of this unique gasket allows the Dichroic Lens option to be easily installed or changed in the field. The standard lens is 3/16" thick clear tempered glass and covers the optional Dichroic Lens when used.

Aiming Knuckle: The aiming knuckle attaches the optical housing to the ballast compartment and allows for a ± 90° vertical and a 350° rotational adjustment. The knuckle is a die-cast from 360 low copper content aluminum.

A flush stainless steel socket head bolt, die-cast teeth and silicone gaskets insure solid aiming positions are retained.

Ballast Enclosure: The ballast housing is a heavy duty single piece 360 low copper content aluminum die-casting, as is the base plate that completes the enclosure assembly. To aid with the installation and fixture service, the base plate is attached to the ballast enclosure by a stainless steel safety cable.

Electrical: All ballasts are integral to the fixture. All fixtures are operationally tested prior to shipment. Electronic ballasts are used for Ceramic Metal Halide fixtures. The electronic ballasts have an "A" sound rating and are HPF, with a THD of less than 10% and available in 120V and 277V. Consult factory for any special requirements. LED fixtures are 120 to 277V, with a 24 volt output.

Finish: Outdoor grade polyester powder paints with UV inhibitors are used to provide a textured finish with a minimum thickness of 3mil. A multi-stage phosphate pre-treatment wash is utilized in our automated in-house dry powder painting system. See the Insight standard pallet for color selection. Custom colors are available. Please consult the factory.

Labels: Masque II fixtures are UL/CUL approved for use in wet Locations, mounted in any position. 150W CMH fixtures are EISA compliant.

Insight Lighting reserves the right to change specifications without notice due to product improvements.

INSIGHT

Rio Rancho, NM 87144
TEL: 505.345.0688
www.insightlighting.com

12/10

McGRAW-EDISON®

energy EFFICIENT

Catalog #	TT-A4-LED-E1-CR	Type	F-4
Project	225 NORTHWESTERN		
Comments		Date	
Prepared by			

DESCRIPTION

The TopTier™ Parking Garage and Canopy Luminaire is an innovative solution that delivers an unparalleled combination of performance and visual comfort. The patented WaveStream™ optical technology blocks the line of sight from the LED light sources to the observer, while extracting the maximum amount of light on task. This approach results in a high level of uniformity and vertical footcandles that enhances safety in the application environment. The TopTier luminaire is UL/cUL listed for wet locations, IP66 and 3G vibration rated.

SPECIFICATION FEATURES

Construction
One-piece, low copper die-cast aluminum housing provides a clean and symmetric housing. Formed aluminum top is sloped to prevent bird nesting. Metal electrical tray allows for easy electrical access for field servicing.

Optics
Unique optical distributions are accomplished using various combinations of reflective backing plates and WaveStream optical technology. The optical Waveguide is manufactured using precision injection molded acrylic with MicroLens® optics. The MicroLens optics contain microscopic inclusions that form a repeatable and redundant pattern to direct light in a precisely prescribed distribution. For the ultimate level of glare control and visual comfort, specify the SG option which adds a Solite® glass lens that works in combination with the Waveguide lens and reflective backing plate.

Offered standard in 4000K (+/- 275K) CCT, optional 3000K and 6000K. Minimum 70 CRI.

Electrical
LED driver(s) are mounted to metal electrical tray for optimal thermal performance. 120-277V 50/60Hz, 347V 60Hz or 480V 60Hz operation. For 0-10V dimming driver(s), specify the DIM option. Shipped standard with Cooper Lighting proprietary circuit module designed to withstand 10kV of transient line surge. Greater than 85% lumen maintenance expected at 60,000 hours, based off LM-80 test data and TM-21. Suitable for ambient temperature applications from -40°C (-40°F) to 40°C (104°F). For 50°C (122°F) applications, specify the HA high ambient option. IP66 rated against the ingress of dust and water.

Mounting
Standard fixture mounts to a square or octagonal 4" surface or recessed j-box via heavy-gauge quick mount bracket. With the addition of a field supplied wet location j-box, the luminaire can be pendant mounted to a rigid or free swinging pendant. Optional mounting methods include trunnion mount and wall mount.

Finish
Housing finished in white Super durable TGIC polyester powder coat paint, 2.5 mil nominal thickness for superior protection against fade and wear. Optional colors include black, bronze, grey, dark platinum and graphite metallic. RAL and custom color matches available. Consult the McGraw-Edison Architectural Colors brochure for the complete selection.

Warranty
Five-year limited warranty.

TT TOPTIER LED

Solid State LED

PARKING GARAGE AND CANOPY LUMINAIRE

DIMENSIONS

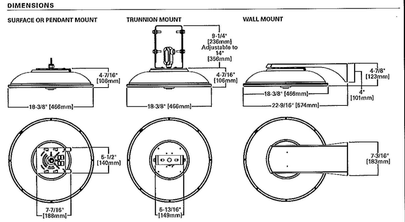

CERTIFICATION DATA
UL/cUL Wet Location Listed
3G Vibration Rated
LM79 / LM80 Compliant
IP66 Rated
ARRA Compliant
ISO 9001

ENERGY DATA
Electronic LED Driver
>0.9 Power Factor
<20% Total Harmonic Distortion
120-277V/60 & 60Hz, 347V/60Hz, 480V/60Hz
-40°C Min. Temprature
40°C Max. Temperature
50°C Max. Temperature (HA Option)

SHIPPING DATA
Approximate Net Weight:
16 lbs. (7.2 kgs.)

Cooper Lighting
by EATON

ADH131097
2013-10-04 13:43:09

outdoor

boardwalk small outdoor

DESCRIPTION
Sleek metal frame offers down light through an opal glass diffuser. Incandescent includes (1) E26 medium base 60 watt or equivalent A19 lamp; fluorescent includes (1) GX24Q-2 base 18 watt triple tube compact fluorescent lamp.120 or 277v.

WEIGHT
5lb / 2.27kg ±



wall projection 5.5" / 140 mm

ORDERING INFORMATION

type	model	finish	lamp	wet location
JW Incandescent PW Compact Fluorescent	635	BL black SI silver	2D E26 A19 60w 120v (JW only) CF18E GX24Q-2 triple tube 18w 120v (PW only) CF26E GX24Q-2 triple tube 18w 277v (PW only)	W wet location

FIXTURE TYPE: F-2
JOB NAME: 225 NORTHWESTERN
NOTES:

LBL
7400 Linder Avenue
Skokie, Illinois 60077
T 847.626.6300
F 847.626.6350
www.lbllighting.com

©2013 LBL Lighting. All Rights Reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

McGRAW-EDISON®

energy EFFICIENT

Catalog #	GLEON-AA-04-LED-E1-SW	Type	F-5
Project	225 NORTHWESTERN		
Comments		Date	
Prepared by			

DESCRIPTION

The Galleon™ LED luminaire delivers exceptional performance in a highly scalable, low-profile design. Patented, high-efficiency AccuLED Optics™ system provides uniform and energy conscious illumination to walkways, parking lots, roadways, building areas and security lighting applications. IP66 rated and UL/cUL Listed for wet locations.

SPECIFICATION FEATURES

Construction
Extruded aluminum driver enclosure thermally isolated from Light Squares for optimal thermal performance. Heavy-wall, die-cast aluminum end caps enclose housing and die-cast aluminum heat sinks. A unique, patent pending interlocking housing and heat sink provides scalability with superior structural rigidity. 3G vibration tested. Optional tool-less hardware available for ease of entry into electrical chamber. Housing is IP66 rated.

Optics
Choice of 12 patented, high-efficiency AccuLED Optics™ manufactured from injection molded acrylic. Optics are precisely designed to shape the distribution maximizing efficiency and application spacing. AccuLED Optics create consistent distributions with the scalability to meet customized application requirements. Offered standard in 4000K (+/-275K) CCT and nominal 70 CRI. Optional 6000K CCT and 3000K CCT (80 CRI).

Electrical
LED drivers are mounted to removable tray assembly for ease of maintenance. 120-277V 60/60Hz, 347V 60Hz or 480V 60Hz operation. Shipped standard with Cooper Lighting proprietary circuit module designed to withstand 10kV of transient line surge. The Galleon LED luminaire is suitable for operation in -40°C to 40°C ambient environments. For applications with ambient temperatures exceeding 40°C, specify the HA (High Ambient) option. Light Squares are IP66 rated. 80% lumen maintenance expected at 60,000 hours.

Mounting
Extruded aluminum arm includes internal bolt guides allowing for easy positioning of fixture during assembly. Designed for pole or wall mounting. When mounting two or more luminaires at 90° or 120° apart, the EA extended arm may be required. Refer to the arm mounting requirement table on page 3. For wall mounting, specify wall mount bracket option. 3G vibration rated.

Finish
Housing finished in Super durable TGIC polyester powder coat paint, 2.5 mil nominal thickness for superior protection against fade and wear. Heat sink is powder coated black. Standard colors include black, bronze, grey, white, dark platinum and graphite metallic. RAL and custom color matches available. Consult the McGraw-Edison Architectural Colors brochure for the complete selection.

Warranty
Five-year warranty.



GLEON
GALLEON LED

1-10 Light Squares

Solid State LED

AREA/SITE LUMINAIRE

DIMENSIONS

POLE MOUNT



WALL MOUNT

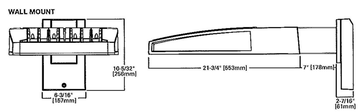

DIMENSION DATA

Number of Light Squares	"A" Width	"B" Standard Arm Length	"B" Optional Arm Length [1]	Weight with Arm (lbs.)	EPA with Arm [2] (Sq. Ft.)
1-4	15-1/2" [394mm]	7" [178mm]	10" [254mm]	33 [15.0 kgs.]	0.56
5-6	21-5/8" [549mm]	7" [178mm]	10" [254mm]	44 [20.0 kgs.]	1.00
7-8	27-5/8" [702mm]	7" [178mm]	13" [330mm]	54 [24.5 kgs.]	1.07
9-10	33-3/4" [857mm]	7" [178mm]	16" [406mm]	63 [28.6 kgs.]	1.12

NOTES: 1. Optional arm length to be used when mounting two fixtures at 90° on a single pole. 2. EPA calculated with optional arm length.

CERTIFICATION DATA
UL/cUL Wet Location Listed
ISO 9001
LM79 / LM80 Compliant
3G Vibration Rated
ARRA Compliant
DesignLights Consortium® Qualified*
IP66 Rated

ENERGY DATA
Electronic LED Driver
>0.9 Power Factor
<20% Total Harmonic Distortion
120V-277V 60/60Hz
347V & 480V 60Hz
-40°C Min. Temperature
40°C Max. Temperature
50°C Max. Temperature (HA Option)

Cooper Lighting
by EATON

*www.designlights.org

ADH1120541
2013-10-01 09:53:38

outdoor

stingray saturn outdoor

DESCRIPTION
Outdoor version of Saturn fixture includes die-cast aluminum trim ring, clear polycarbonate enclosure, and waterproof rubber gasket. Available in black, bronze, silver and white finish. Incandescent accepts (2) 40 watt or equivalent E26 medium base T10 lamps (not included); Fluorescent 13w Quad includes (2) 13 watt G24Q-1 base quad tube compact fluorescent lamps and electronic ballast; Fluorescent 18w Quad includes (2) 18 watt G24Q-2 base quad tube compact fluorescent lamps and electronic ballast; Fluorescent 26w Quad includes (2) 26 watt G24Q-3 base quad tube compact fluorescent lamps and electronic ballast..



wall projection 3.9" / 99 mm

ORDERING INFORMATION

type	model	finish	lamp	wet location
JW Incandescent PW Compact Fluorescent	6021	B black BZ bronze S silver W white	213HE G24Q-1 Quad Tube 2x13w 120v (PW only) 213HE G24Q-1 Quad Tube 2x13w 277v (PW only) 218HE G24Q-2 Quad Tube 2x18w 120v (PW only) 218HE G24Q-2 Quad Tube 2x18w 277v (PW only) 226HE G24Q-3 Quad Tube 2x26w 120v (PW only) 226HE G24Q-3 Quad Tube 2x26w 277v (PW only) 260 E26 T10 2x40w 120v (JW only)	W wet location

FIXTURE TYPE: F-3
JOB NAME: 225 NORTHWESTERN
NOTES:

LBL
7400 Linder Avenue
Skokie, Illinois 60077
T 847.626.6300
F 847.626.6350
www.lbllighting.com

©2013 LBL Lighting. All Rights Reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

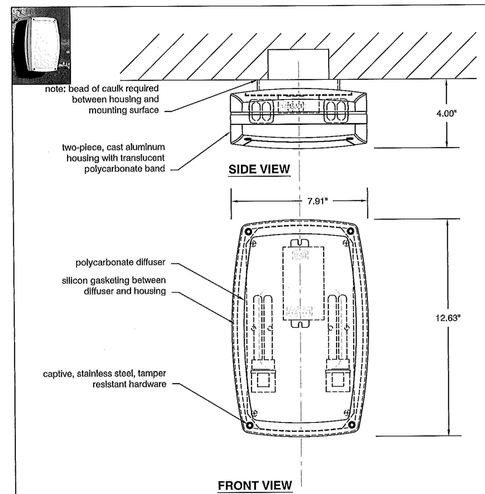

OXYGEN LIGHTING ©

DEVA outdoor
oxygen **2-706-xx**

LAMPING
- 2 x 13W quad tube 4-pin fluorescent (G24q-2)

BALLAST
- electronic, HPF programmed start (-30°C minimum starting temperature)

DIFFUSER
- Injection molded matte white polycarbonate

METAL FINISHES
- 6 - white
- 15 - black
- 16 - grey
- all finishes: polyester powdercoat

DIMENSIONS
- 7.91"(w) x 12.63"(h) 4.00" (ext)

VOLTAGE
- 120V to 277V

INSTALLATION
- 4" octagonal "J"- Box
- UL approved for wet locations, (Installer must provide a bead of caulk between fixture housing and mounting surface)
- wall or ceiling mount

Sample Catalog Number

Series #	Finish	Catalog number
2-706 -	15	= 2-706-15

oxygen

OXYGEN LIGHTING SUITE 900
580 BROADWAY, NEW YORK, NY 10012
TEL. (877) 607-0202 FAX (877) 607-0203

PROJECT: 225 NORTHWESTERN
DATE: F-1

KJG Architecture, Inc.
527 Sagamore Parkway W., Suite 101
West Lafayette, Indiana 47906
Office: 765.497.4598 Fax: 765.497.4599
www.kjgarchitecture.com

PROJECT TITLE:
225 NORTHWESTERN AVE.
PLANNED DEVELOPMENT
CBW TO PDMX

225 NORTHWESTERN AVE.
WEST LAFAYETTE, IN 47906

DISCLAIMER:
This is an original design, created by KJG Architecture, Inc. The concepts, ideas, plans and details are the sole property of KJG Architecture, Inc. None of the aforementioned shall be used by or disclosed to any person, firm or organization for any purpose without the prior written permission of KJG Architecture, Inc.

PROFESSIONAL SEAL:

PRELIMINARY PLAN SUBMITAL NOT FOR CONSTRUCTION

PROJECT DATE:
01/28/14

REV.	DESCRIPTION:	DRAWN BY:	DATE ISSUED:

PROJECT NUMBER: A2013.087
DRAWN BY:

DRAWING TITLE:
LIGHTING CUTSHEETS

SHEET NUMBER:
E101